

Cooling Capacity: 17,000 - 57,000 BTU/h

Heating Capacity: 17,000 - 57,000 BTU/h

SPLIT SYSTEM HEAT PUMP UP TO 15 SEER / R-410A

■ Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Expanded Heating Data	20
AHRI Ratings	22
Dimensions	38
Wiring Diagram	39
Accessories	40



■ Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency Copeland® scroll compressor
- Advanced Copeland® CoreSense™ technology
- High density foam compressor sound blanket
- Time-delay technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid line filter drier
- Factory-installed suction line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- AHRI Certified; ETL Listed

■ Cabinet Features

- Grille-style sound control top design
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Rust-resistant screws
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.

SPECIFICATIONS

	DZ14SA 0181A*	DZ14SA 0241A*	DZ14SA 0301A*	DZ14SA 0361A*	DZ14SA 0381A*	DZ14SA 0421A*	DZ14SA 0481A*	DZ14SA 0601A*
CAPACITIES AND RATINGS								
Nominal Cooling (BTU/h)	18,000	24,000	27,800	33,400	36,000	40,000	45,000	56,500
Nominal Heating (BTU/h)	17,900	23,600	27,400	30,000	36,000	40,000	44,000	57,000
Decibels	70	72	72	74	71	73	74	75
COMPRESSOR								
RLA	9.0	12.8	14.1	14.1	17.9	17.9	19.9	26.4
LRA	48.0	58.3	73.0	77.0	112.0	112.0	109.0	134.0
CONDENSER FAN MOTOR								
Horsepower	1/8	1/6	1/6	1/4	¼	¼	¼	¼
FLA	0.6	1.1	1.10	1.5	1.5	1.5	1.5	1.5
LRA	1.0	1.5	1.9	3.1	3.1	3.1	3.1	3.1
REFRIGERATION SYSTEM								
Refrigerant Line Size								
Liquid Line Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Line Size ("O.D.)	¾"	¾"	¾"	⅞"	1⅞"	1⅞"	1⅞"	1⅞"
Refrigerant Connection Size								
Liquid Valve Size ("O.D.)	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction Valve Size ("O.D.)	¾"	¾"	¾"	¾"	⅞"	⅞"	⅞"	⅞"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	140	160	185	186	211	210	270	275
ELECTRICAL DATA								
Volts-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	12.0	17.1	18.7	19.1	23.9	23.9	26.4	34.5
Max. Overcurrent Protection ³	20	25	30	30	40	40	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197/253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
Low Voltage	½"	½"	½"	½"	½"	½"	½"	½"
EQUIPMENT WEIGHT (LBS)	173	183	185	192	223	246	278	292
SHIP WEIGHT (LBS)	191	201	203	210	245	268	300	314

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply ⅜" to 1⅞" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil.
THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

COOLING DATA — DZ14SA0181A* / ARPT18B14**

		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	525	MBh	16.9	17.5	19.2	-	16.5	17.1	18.7	-	16.1	16.7	18.3	-	15.7	16.3	17.8	-	14.9	15.5	16.9	-	13.8	14.3	15.7	-	13.8	14.3	15.7	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-		
	ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	13	-	19	17	13	-	19	17	13	-		
	kW	1.16	1.18	1.22	-	1.24	1.27	1.31	-	1.32	1.35	1.39	-	1.38	1.41	1.46	-	1.44	1.47	1.51	-	1.49	1.52	1.57	-	1.49	1.52	1.57	-		
	Amps	4.4	4.5	4.7	-	4.8	4.9	5.1	-	5.2	5.3	5.5	-	5.5	5.7	5.9	-	5.9	6.0	6.2	-	6.2	6.4	6.6	-	6.2	6.4	6.6	-		
70	580	Hi PR	205	220	233	-	230	247	261	-	261	281	297	-	298	320	338	-	335	360	380	-	370	398	420	-	370	398	420	-	
	Lo PR	105	111	122	-	111	118	129	-	115	122	134	-	121	129	140	-	127	135	147	-	131	139	152	-	131	139	152	-		
	MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-	14.0	14.5	15.9	-		
	S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.66	0.45	-	0.81	0.68	0.47	-	0.82	0.69	0.48	-	0.82	0.69	0.48	-		
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-		
70	675	kW	1.18	1.20	1.24	-	1.26	1.29	1.33	-	1.34	1.36	1.41	-	1.40	1.43	1.48	-	1.46	1.49	1.54	-	1.51	1.54	1.59	-	1.51	1.54	1.59	-	
	Amps	4.5	4.6	4.8	-	4.9	5.0	5.1	-	5.3	5.4	5.6	-	5.6	5.8	5.9	-	6.0	6.1	6.3	-	6.3	6.5	6.7	-	6.3	6.5	6.7	-		
	Hi PR	208	224	237	-	234	251	266	-	266	286	302	-	303	326	344	-	341	366	387	-	376	405	428	-	376	405	428	-		
	Lo PR	107	113	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	133	142	155	-	133	142	155	-		
		MBh	17.6	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.4	17.0	18.6	-	15.6	16.2	17.7	-	14.4	15.0	16.4	-	14.4	15.0	16.4	-	
75	525	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-		
	kW	1.19	1.21	1.24	-	1.27	1.30	1.34	-	1.35	1.37	1.42	-	1.41	1.44	1.49	-	1.47	1.50	1.55	-	1.52	1.55	1.60	-	1.52	1.55	1.60	-		
	Amps	4.5	4.6	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.5	6.8	-	6.4	6.5	6.8	-		
	Hi PR	210	226	239	-	236	254	268	-	268	289	305	-	306	329	347	-	344	370	391	-	380	409	432	-	380	409	432	-		
75	675	Lo PR	108	115	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	135	143	156	-	135	143	156	-	
	MBh	17.2	17.7	19.1	20.5	16.8	17.3	18.7	20.0	16.4	16.8	18.2	19.6	16.0	16.4	17.8	19.1	15.2	15.6	16.9	18.1	14.0	14.5	15.6	16.8	14.0	14.5	15.6	16.8		
	S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39	0.90	0.81	0.61	0.39		
	ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	12	22	20	17	12		
	kW	1.17	1.19	1.23	1.27	1.25	1.28	1.32	1.36	1.33	1.36	1.40	1.44	1.39	1.42	1.47	1.51	1.45	1.48	1.53	1.58	1.50	1.53	1.58	1.63	1.50	1.53	1.58	1.63		
75	580	Amps	4.5	4.6	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.4	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.4	6.7	6.9	6.3	6.4	6.7	6.9	
	Hi PR	207	223	235	245	232	250	264	275	264	284	300	313	301	323	342	356	338	364	384	401	374	402	425	443	374	402	425	443		
	Lo PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164	132	141	154	164		
	MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1	14.3	14.7	15.9	17.1		
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.59	0.38	0.89	0.80	0.60	0.39	0.93	0.83	0.63	0.40	0.93	0.84	0.63	0.41	0.93	0.84	0.63	0.41		
75	675	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11	21	19	16	11	
	kW	1.19	1.21	1.24	1.28	1.27	1.30	1.34	1.38	1.35	1.37	1.42	1.46	1.41	1.44	1.49	1.54	1.47	1.50	1.55	1.60	1.52	1.55	1.60	1.65	1.52	1.55	1.60	1.65		
	Amps	4.5	4.6	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.5	6.8	7.0	6.4	6.5	6.8	7.0		
	Hi PR	210	226	239	249	236	254	268	280	268	289	305	318	306	329	347	362	344	370	391	408	380	409	432	451	380	409	432	451		
	Lo PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	138	151	161	135	143	156	167	135	143	156	167		
75	525	MBh	17.9	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.7	17.2	18.6	20.0	15.9	16.3	17.7	19.0	14.7	15.1	16.4	17.6	14.7	15.1	16.4	17.6	
	S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43	0.98	0.88	0.66	0.43		
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10	20	18	15	10		
	kW	1.19	1.22	1.25	1.29	1.28	1.31	1.35	1.39	1.36	1.39	1.43	1.47	1.42	1.45	1.50	1.55	1.48	1.51	1.56	1.61	1.53	1.56	1.61	1.67	1.53	1.56	1.61	1.67		
	Amps	4.6	4.7	4.8	5.0	4.9	5.1	5.2	5.4	5.4	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.1	6.4	6.6	6.8	7.1		
75	675	Hi PR	212	229	241	252	238	257	271	283	271	292	308	321	309	332	351	366	347	374	395	412	384	413	436	455	384	413	436	455	
	Lo PR	109	116	126	135	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	163	136	145	158	168	136	145	158	168		
	kW= Total system power Amps = outdoor unit amps (comp.+fan)																														
	Shaded area reflects ACCA (TVA) conditions																														
	IDB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction service valves.																														

COOLING DATA — DZ14SA0181A* / ARPT18B14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
525	MBh	17.5	17.8	19.1	20.4	17.1	17.4	18.6	19.9	16.6	17.0	18.2	19.4	16.2	16.6	17.7	19.0	15.4	15.8	16.8	18.0	14.3	14.6	15.6	16.7	14.3	14.6	15.6	16.7								
	S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	0.99	0.93	0.75	0.56								
	ΔT	26	25	22	18	27	26	22	18	27	26	22	18	27	26	22	18	26	25	22	18	25	24	21	16	25	24	21	16								
	kW	1.18	1.20	1.24	1.28	1.26	1.29	1.33	1.37	1.34	1.37	1.41	1.45	1.41	1.43	1.48	1.53	1.46	1.49	1.54	1.59	1.51	1.54	1.59	1.64	1.51	1.54	1.59	1.64								
	Amps	4.5	4.6	4.8	4.9	4.9	5.0	5.1	5.3	5.3	5.4	5.6	5.8	5.6	5.8	6.0	6.2	6.0	6.1	6.3	6.6	6.3	6.5	6.7	7.0	6.3	6.5	6.7	7.0								
80	Hi PR	209	225	237	248	234	252	266	278	267	287	303	316	304	327	345	360	342	368	388	405	377	406	429	447	377	406	429	447								
	Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	153	129	137	150	160	134	142	155	165	134	142	155	165								
	MBh	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.5	16.8	18.0	19.2	15.7	16.0	17.1	18.3	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9								
	S/T	0.89	0.84	0.68	0.51	0.92	0.87	0.71	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58								
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	26	25	21	17	25	24	21	17	23	23	20	16	23	23	20	16								
675	kW	1.19	1.22	1.25	1.29	1.28	1.31	1.35	1.39	1.36	1.39	1.43	1.47	1.42	1.45	1.50	1.55	1.48	1.51	1.56	1.61	1.53	1.56	1.61	1.67	1.53	1.56	1.61	1.67								
	Amps	4.6	4.7	4.8	5.0	4.9	5.1	5.2	5.4	5.4	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.1	6.4	6.6	6.8	7.1								
	Hi PR	213	229	241	252	238	257	271	283	271	292	308	321	309	332	351	366	347	374	395	412	384	413	436	455	384	413	436	455								
	Lo PR	109	116	126	135	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	163	136	145	158	168	136	145	158	168								
	MBh	18.3	18.7	19.9	21.3	17.8	18.2	19.5	20.8	17.4	17.8	19.0	20.3	17.0	17.4	18.5	19.8	16.1	16.5	17.6	18.8	14.9	15.3	16.3	17.4	14.9	15.3	16.3	17.4								
85	S/T	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61								
	ΔT	23	22	19	15	24	23	20	16	24	23	20	16	23	23	20	16	22	22	20	16	20	21	18	15	20	21	18	15								
	kW	1.20	1.23	1.26	1.30	1.29	1.32	1.36	1.40	1.37	1.40	1.44	1.48	1.44	1.47	1.51	1.56	1.49	1.53	1.57	1.62	1.54	1.58	1.63	1.68	1.54	1.58	1.63	1.68								
	Amps	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.7	6.9	7.1	6.5	6.7	6.9	7.1								
	Hi PR	215	231	244	254	241	259	274	285	274	295	311	325	312	336	355	370	351	378	399	416	388	417	441	460	388	417	441	460								
525	Lo PR	110	117	128	136	116	123	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170	137	146	160	170								
	MBh	17.8	18.1	19.0	20.2	17.4	17.7	18.5	19.8	16.9	17.3	18.1	19.3	16.5	16.8	17.6	18.8	15.7	16.0	16.8	17.9	14.5	14.8	15.5	16.6	14.5	14.8	15.5	16.6								
	S/T	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73	1.00	1.00	0.90	0.73								
	ΔT	28	28	26	23	28	28	26	23	28	28	26	23	29	28	27	23	27	28	26	23	25	26	25	21	25	26	25	21								
	kW	1.19	1.21	1.25	1.29	1.27	1.30	1.34	1.38	1.35	1.38	1.42	1.46	1.42	1.45	1.49	1.54	1.47	1.50	1.55	1.60	1.52	1.55	1.60	1.66	1.52	1.55	1.60	1.66								
580	Amps	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.5	5.6	5.8	5.7	5.8	6.0	6.2	6.1	6.2	6.4	6.6	6.4	6.6	6.8	7.0	6.4	6.6	6.8	7.0								
	Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	348	363	345	371	392	409	381	410	433	452	381	410	433	452								
	Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	161	135	144	157	167	135	144	157	167								
	MBh	18.0	18.4	19.3	20.5	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.8	17.1	17.9	19.1	15.9	16.2	17.0	18.2	14.8	15.0	15.8	16.8	14.8	15.0	15.8	16.8								
	S/T	0.94	0.90	0.81	0.66	0.97	0.94	0.84	0.68	0.99	0.96	0.87	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.76								
675	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	25	26	25	22	23	24	23	20	23	24	23	20								
	kW	1.20	1.23	1.26	1.30	1.29	1.32	1.36	1.40	1.37	1.40	1.44	1.48	1.44	1.47	1.51	1.56	1.49	1.53	1.57	1.62	1.54	1.58	1.63	1.68	1.54	1.58	1.63	1.68								
	Amps	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.7	6.9	7.1	6.5	6.7	6.9	7.1								
	Hi PR	215	231	244	254	241	259	274	285	274	295	311	325	312	336	355	370	351	378	399	416	388	417	441	460	388	417	441	460								
	Lo PR	110	117	128	136	116	123	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170	137	146	160	170								
85	MBh	18.6	18.9	19.8	21.2	18.1	18.5	19.4	20.7	17.7	18.1	18.9	20.2	17.3	17.6	18.4	19.7	16.4	16.7	17.5	18.7	15.2	15.5	16.2	17.3	15.2	15.5	16.2	17.3								
	S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80	1.00	1.00	0.98	0.80								
	ΔT	25	24	23	20	25	25	23	20	24	25	23	20	24	24	24	20	22	23	23	20	21	21	22	19	22	23	20	19								
	kW	1.21	1.24	1.27	1.31	1.30	1.33	1.37	1.41	1.38	1.41	1.45	1.50	1.45	1.48	1.52	1.57	1.51	1.54	1.59	1.64	1.56	1.59	1.64	1.69	1.56	1.59	1.64	1.69								
	Amps	4.7	4.8	4.9	5.1	5.0	5.2	5.3	5.5	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.6	6.7	7.0	7.2	6.6	6.7	7.0	7.2								
525	Hi PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	373	354	381	403	420	392	421	445	464	392	421	445	464								
	Lo PR	111	118	129	137	117	125	136	145	122	130	141	151	128	136	149	158	134	143	156	166	139	148	161	172	139	148	161	172								
	kW=Total system power Amps = outdoor unit amps (comp.+fan)																																				

kW= Total system power
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects AHRI conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

COOLING DATA — DZ14SA0241A* / ARPT24B14**

		OUTDOOR AMBIENT TEMPERATURE												115°F																							
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	21.1	21.8	23.9	-	20.6	21.3	23.4	-	20.1	20.8	22.8	-	19.6	20.3	22.3	-	18.6	19.3	21.1	-	17.3	17.9	19.6	-	17.3	17.9	19.6	-	17.3	17.9	19.6	-				
	S/T	0.69	0.57	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-				
	ΔT	19	16	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	18	15	12	-	18	15	12	-				
	kW	1.55	1.58	1.62	-	1.66	1.69	1.74	-	1.75	1.78	1.84	-	1.83	1.87	1.92	-	1.90	1.94	2.00	-	1.96	2.00	2.06	-	1.96	2.00	2.06	-	1.96	2.00	2.06	-				
	Amps	5.8	5.9	6.1	-	6.2	6.4	6.6	-	6.7	6.9	7.1	-	7.2	7.4	7.6	-	7.6	7.8	8.1	-	8.1	8.3	8.5	-	8.1	8.3	8.5	-	8.1	8.3	8.5	-				
	Hi PR	204	220	232	-	229	247	260	-	261	281	296	-	297	319	337	-	334	359	380	-	369	397	419	-	369	397	419	-	369	397	419	-				
850	Lo PR	101	108	118	-	107	114	125	-	111	119	129	-	117	125	136	-	123	130	142	-	127	135	147	-	127	135	147	-	127	135	147	-				
	MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	21.2	22.0	24.1	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-	18.7	19.4	21.2	-	18.7	19.4	21.2	-				
	S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-				
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-	17	14	11	-	17	14	11	-				
	kW	1.59	1.62	1.66	-	1.69	1.73	1.78	-	1.79	1.83	1.88	-	1.87	1.91	1.97	-	1.95	1.99	2.05	-	2.01	2.05	2.11	-	2.01	2.05	2.11	-	2.01	2.05	2.11	-				
	Amps	5.9	6.1	6.3	-	6.4	6.6	6.8	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-	8.3	8.5	8.8	-	8.3	8.5	8.8	-	8.3	8.5	8.8	-				
900	Hi PR	211	227	239	-	236	254	269	-	269	289	305	-	306	329	348	-	344	371	391	-	380	409	432	-	380	409	432	-	380	409	432	-				
	Lo PR	105	111	122	-	111	118	128	-	115	122	133	-	121	128	140	-	126	135	147	-	131	139	152	-	131	139	152	-	131	139	152	-				
	MBh	23.1	23.9	26.2	-	22.5	23.3	25.6	-	22.0	22.8	25.0	-	21.5	22.2	24.4	-	20.4	21.1	23.1	-	18.9	19.6	21.4	-	18.9	19.6	21.4	-	18.9	19.6	21.4	-				
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-	0.84	0.70	0.48	-	0.84	0.70	0.48	-				
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	11	-	16	14	11	-	16	14	11	-				
	kW	1.59	1.62	1.66	-	1.70	1.73	1.78	-	1.79	1.83	1.88	-	1.88	1.92	1.97	-	1.95	1.99	2.05	-	2.01	2.05	2.12	-	2.01	2.05	2.12	-	2.01	2.05	2.12	-				
75	Amps	6.0	6.1	6.3	-	6.4	6.6	6.8	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.9	8.1	8.3	-	8.3	8.5	8.8	-	8.3	8.5	8.8	-	8.3	8.5	8.8	-				
	Hi PR	211	227	240	-	237	255	269	-	270	290	306	-	307	330	349	-	345	372	392	-	382	411	434	-	382	411	434	-	382	411	434	-				
	Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-	131	140	152	-	131	140	152	-				
	MBh	21.4	22.1	23.9	25.6	20.9	21.6	23.3	25.0	20.4	21.0	22.8	24.4	19.9	20.5	22.2	23.8	18.9	19.5	21.1	22.7	17.5	18.1	19.6	21.0	17.5	18.1	19.6	21.0	17.5	18.1	19.6	21.0				
	S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39	0.90	0.80	0.61	0.39	0.90	0.80	0.61	0.39				
	ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11	21	19	16	11	21	19	16	11				
700	kW	1.56	1.59	1.64	1.68	1.67	1.70	1.75	1.80	1.76	1.80	1.85	1.91	1.85	1.88	1.94	2.00	1.92	1.96	2.01	2.08	1.98	2.02	2.08	2.14	1.98	2.02	2.08	2.14	1.98	2.02	2.08	2.14				
	Amps	5.8	6.0	6.2	6.4	6.3	6.4	6.6	6.9	6.8	7.0	7.2	7.4	7.3	7.4	7.7	7.9	7.7	7.9	8.1	8.4	8.1	8.3	8.6	8.9	8.1	8.3	8.6	8.9	8.1	8.3	8.6	8.9				
	Hi PR	206	222	234	245	232	249	263	274	263	283	299	312	300	323	341	355	337	363	383	400	373	401	424	442	373	401	424	442	373	401	424	442				
	Lo PR	103	109	119	127	108	115	126	134	113	120	131	139	118	126	137	146	124	132	144	153	128	136	149	159	128	136	149	159	128	136	149	159				
	MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.1	22.8	24.7	26.5	21.6	22.2	24.1	25.8	20.5	21.1	22.9	24.5	19.0	19.6	21.2	22.7	19.0	19.6	21.2	22.7	19.0	19.6	21.2	22.7				
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.63	0.40	0.93	0.83	0.63	0.41	0.93	0.83	0.63	0.40	0.93	0.83	0.63	0.41				
850	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10	19	18	14	10	19	18	14	10				
	kW	1.60	1.63	1.67	1.72	1.71	1.74	1.79	1.84	1.80	1.84	1.89	1.95	1.89	1.93	1.98	2.05	1.96	2.00	2.06	2.13	2.02	2.07	2.13	2.20	2.02	2.07	2.13	2.20	2.02	2.07	2.13	2.20				
	Amps	6.0	6.1	6.3	6.5	6.5	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.8	9.2	8.4	8.6	8.8	9.2	8.4	8.6	8.8	9.2				
	Hi PR	213	229	242	252	239	257	271	283	271	292	308	322	309	333	351	366	348	374	395	412	384	414	437	456	384	414	437	456	384	414	437	456				
	Lo PR	106	112	123	131	112	119	130	138	116	123	135	144	122	130	142	151	128	136	148	158	132	141	153	163	132	141	153	163	132	141	153	163				
	MBh	23.5	24.1	26.1	28.1	22.9	23.6	25.5	27.4	22.4	23.0	24.9	26.7	21.8	22.5	24.3	26.1	20.7	21.3	23.1	24.8	19.2	19.8	21.4	23.0	19.2	19.8	21.4	23.0	19.2	19.8	21.4	23.0				
900	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41				
	ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	19	15	11	20	18	15	10	19	17	14	10	19	17	14	10	19	17	14	10				
	kW	1.60	1.63	1.68	1.73	1.71	1.74	1.79	1.85	1.81	1.84	1.90	1.96	1.89	1.93	1.99	2.05	1.97	2.01	2.07	2.13	2.03	2.07	2.13	2.20	2.03	2.07	2.13	2.20	2.03	2.07	2.13	2.20				
	Amps	6.0	6.2	6.3	6.6	6.5	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.2	8.4	8.6	8.9	9.2	8.4	8.6	8.9	9.2				
	Hi PR	213	230	242</																																	

COOLING DATA — DZ14SA0241A* / ARPT24B14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																															
		65°F						75°F						85°F						95°F						105°F						115°F																	
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203	207										
80	700	MBh	21.8	22.3	23.8	25.5	27.1	28.7	30.3	31.9	33.5	35.1	36.7	38.3	39.9	41.5	43.1	44.7	46.3	47.9	49.5	51.1	52.7	54.3	55.9	57.5	59.1	60.7	62.3	63.9	65.5	67.1	68.7	70.3	71.9	73.5	75.1	76.7	78.3	79.9									
		S/T	0.86	0.80	0.65	0.49	0.33	0.17	0.01	-0.15	-0.31	-0.47	-0.63	-0.79	-0.95	-1.11	-1.27	-1.43	-1.59	-1.75	-1.91	-2.07	-2.23	-2.39	-2.55	-2.71	-2.87	-3.03	-3.19	-3.35	-3.51	-3.67	-3.83	-3.99	-4.15	-4.31	-4.47	-4.63	-4.79	-4.95	-5.11								
		ΔT	25	24	20	16	12	8	4	0	-4	-8	-12	-16	-20	-24	-28	-32	-36	-40	-44	-48	-52	-56	-60	-64	-68	-72	-76	-80	-84	-88	-92	-96	-100	-104	-108	-112	-116	-120	-124	-128							
		kW	1.57	1.60	1.65	1.70	1.75	1.80	1.85	1.90	1.95	2.00	2.05	2.10	2.15	2.20	2.25	2.30	2.35	2.40	2.45	2.50	2.55	2.60	2.65	2.70	2.75	2.80	2.85	2.90	2.95	3.00	3.05	3.10	3.15	3.20	3.25	3.30	3.35	3.40	3.45	3.50							
		Amps	5.9	6.0	6.2	6.4	6.6	6.8	7.0	7.2	7.4	7.6	7.8	8.0	8.2	8.4	8.6	8.8	9.0	9.2	9.4	9.6	9.8	10.0	10.2	10.4	10.6	10.8	11.0	11.2	11.4	11.6	11.8	12.0	12.2	12.4	12.6	12.8	13.0	13.2	13.4	13.6							
		Hi PR	208	224	237	247	257	267	277	287	297	307	317	327	337	347	357	367	377	387	397	407	417	427	437	447	457	467	477	487	497	507	517	527	537	547	557	567	577	587	597	607							
		Lo PR	104	110	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	248	256	264	272	280	288	296	304	312	320	328	336	344	352	360	368	376	384	392	400	408	416							
	850	MBh	23.6	24.1	25.8	27.6	29.4	31.2	33.0	34.8	36.6	38.4	40.2	42.0	43.8	45.6	47.4	49.2	51.0	52.8	54.6	56.4	58.2	60.0	61.8	63.6	65.4	67.2	69.0	70.8	72.6	74.4	76.2	78.0	79.8	81.6	83.4	85.2	87.0	88.8	90.6	92.4	94.2	96.0					
		S/T	0.89	0.83	0.68	0.51	0.34	0.17	0.01	-0.15	-0.31	-0.47	-0.63	-0.79	-0.95	-1.11	-1.27	-1.43	-1.59	-1.75	-1.91	-2.07	-2.23	-2.39	-2.55	-2.71	-2.87	-3.03	-3.19	-3.35	-3.51	-3.67	-3.83	-3.99	-4.15	-4.31	-4.47	-4.63	-4.79	-4.95	-5.11	-5.27	-5.43	-5.59					
		ΔT	23	22	19	15	11	7	3	-1	-5	-9	-13	-17	-21	-25	-29	-33	-37	-41	-45	-49	-53	-57	-61	-65	-69	-73	-77	-81	-85	-89	-93	-97	-101	-105	-109	-113	-117	-121	-125	-129							
kW		1.61	1.64	1.69	1.73	1.78	1.83	1.88	1.93	1.98	2.03	2.08	2.13	2.18	2.23	2.28	2.33	2.38	2.43	2.48	2.53	2.58	2.63	2.68	2.73	2.78	2.83	2.88	2.93	2.98	3.03	3.08	3.13	3.18	3.23	3.28	3.33	3.38	3.43	3.48	3.53	3.58	3.63	3.68					
Amps		6.1	6.2	6.4	6.6	6.8	7.0	7.2	7.4	7.6	7.8	8.0	8.2	8.4	8.6	8.8	9.0	9.2	9.4	9.6	9.8	10.0	10.2	10.4	10.6	10.8	11.0	11.2	11.4	11.6	11.8	12.0	12.2	12.4	12.6	12.8	13.0	13.2	13.4	13.6	13.8	14.0	14.2	14.4					
Hi PR		215	231	244	255	266	277	288	299	310	321	332	343	354	365	376	387	398	409	420	431	442	453	464	475	486	497	508	519	530	541	552	563	574	585	596	607	618	629	640	651	662	673	684					
Lo PR		107	114	124	132	140	148	156	164	172	180	188	196	204	212	220	228	236	244	252	260	268	276	284	292	300	308	316	324	332	340	348	356	364	372	380	388	396	404	412	420	428	436	444					
900	MBh	23.9	24.4	26.1	27.9	29.7	31.5	33.3	35.1	36.9	38.7	40.5	42.3	44.1	45.9	47.7	49.5	51.3	53.1	54.9	56.7	58.5	60.3	62.1	63.9	65.7	67.5	69.3	71.1	72.9	74.7	76.5	78.3	80.1	81.9	83.7	85.5	87.3	89.1	90.9	92.7	94.5	96.3	98.1	99.9				
	S/T	0.91	0.85	0.69	0.52	0.35	0.18	0.02	-0.15	-0.32	-0.49	-0.66	-0.83	-1.00	-1.17	-1.34	-1.51	-1.68	-1.85	-2.02	-2.19	-2.36	-2.53	-2.70	-2.87	-3.04	-3.21	-3.38	-3.55	-3.72	-3.89	-4.06	-4.23	-4.40	-4.57	-4.74	-4.91	-5.08	-5.25	-5.42	-5.59	-5.76	-5.93	-6.10					
	ΔT	22	21	18	15	11	7	3	-1	-5	-9	-13	-17	-21	-25	-29	-33	-37	-41	-45	-49	-53	-57	-61	-65	-69	-73	-77	-81	-85	-89	-93	-97	-101	-105	-109	-113	-117	-121	-125	-129	-133	-137						
	kW	1.61	1.64	1.69	1.74	1.79	1.84	1.89	1.94	1.99	2.04	2.09	2.14	2.19	2.24	2.29	2.34	2.39	2.44	2.49	2.54	2.59	2.64	2.69	2.74	2.79	2.84	2.89	2.94	2.99	3.04	3.09	3.14	3.19	3.24	3.29	3.34	3.39	3.44	3.49	3.54	3.59	3.64	3.69	3.74				
	Amps	6.1	6.2	6.4	6.6	6.8	7.0	7.2	7.4	7.6	7.8	8.0	8.2	8.4	8.6	8.8	9.0	9.2	9.4	9.6	9.8	10.0	10.2	10.4	10.6	10.8	11.0	11.2	11.4	11.6	11.8	12.0	12.2	12.4	12.6	12.8	13.0	13.2	13.4	13.6	13.8	14.0	14.2	14.4					
	Hi PR	216	232	245	255	266	277	288	299	310	321	332	343	354	365	376	387	398	409	420	431	442	453	464	475	486	497	508	519	530	541	552	563	574	585	596	607	618	629	640	651	662	673	684					
	Lo PR	107	114	124	132	140	148	156	164	172	180	188	196	204	212	220	228	236	244	252	260	268	276	284	292	300	308	316	324	332	340	348	356	364	372	380	388	396	404	412	420	428	436	444					
85	700	MBh	22.2	22.6	23.7	25.3	26.9	28.5	30.1	31.7	33.3	34.9	36.5	38.1	39.7	41.3	42.9	44.5	46.1	47.7	49.3	50.9	52.5	54.1	55.7	57.3	58.9	60.5	62.1	63.7	65.3	66.9	68.5	70.1	71.7	73.3	74.9	76.5	78.1	79.7	81.3	82.9	84.5	86.1	87.7	89.3	90.9		
		S/T	0.90	0.87	0.78	0.64	0.49	0.34	0.19	0.04	-0.11	-0.26	-0.41	-0.56	-0.71	-0.86	-1.01	-1.16	-1.31	-1.46	-1.61	-1.76	-1.91	-2.06	-2.21	-2.36	-2.51	-2.66	-2.81	-2.96	-3.11	-3.26	-3.41	-3.56	-3.71	-3.86	-4.01	-4.16	-4.31	-4.46	-4.61	-4.76	-4.91	-5.06	-5.21				
		ΔT	26	26	24	21	18	14	10	6	2	-2	-6	-10	-14	-18	-22	-26	-30	-34	-38	-42	-46	-50	-54	-58	-62	-66	-70	-74	-78	-82	-86	-90	-94	-98	-102	-106	-110	-114	-118	-122	-126	-130	-134	-138	-142	-146	-150
		kW	1.58	1.61	1.66	1.71	1.76	1.81	1.86	1.91	1.96	2.01	2.06	2.11	2.16	2.21	2.26	2.31	2.36	2.41	2.46	2.51	2.56	2.61	2.66	2.71	2.76	2.81	2.86	2.91	2.96	3.01	3.06	3.11	3.16	3.21	3.26	3.31	3.36	3.41	3.46	3.51	3.56	3.61	3.66	3.71	3.76	3.81	
		Amps	5.9	6.1	6.3	6.5	6.7	6.9	7.1	7.3	7.5	7.7	7.9	8.1	8.3	8.5	8.7	8.9	9.1	9.3	9.5	9.7	9.9	10.1	10.3	10.5	10.7	10.9	11.1	11.3	11.5	11.7	11.9	12.1	12.3	12.5	12.7	12.9	13.1	13.3	13.5	13.7	13.9	14.1	14.3	14.5	14.7	14.9	
		Hi PR	211	227	239	250	261	272	283	294	305	316	327	338	349	360	371	382	393	404	415	426	437	448	459	470	481	492	503	514	525	536	547	558	569	580	591	602	613	624	635	646	657	668	679	690	701	712	723
		Lo PR	105	111	121	129	137	145	153	161	169	177	185	193	201	209	217	225	233	241	249	257	265	273	281	289	297	305	313	321	329	337	345	353	361	369	377	385	393	401	409	417	425	433	441	449	457	465	

COOLING DATA — DZ14SA0301A* / ARPT30B14**

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																115°F																																	
				65°F				75°F				85°F				95°F				105°F				115°F																													
				ENTERING INDOOR WET BULB TEMPERATURE																																																	
70	875	MBh	26.4	27.4	30.0	-	25.8	26.8	29.3	-	25.2	26.1	28.6	-	24.6	25.5	27.9	-	23.4	24.2	26.5	-	21.7	22.4	24.6	-																											
		S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-																											
		ΔT	19	16	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-																											
		kW	1.90	1.94	1.99	-	2.04	2.08	2.14	-	2.16	2.20	2.27	-	2.26	2.31	2.38	-	2.35	2.40	2.47	-	2.43	2.48	2.56	-																											
		Amps	7.4	7.5	7.8	-	7.9	8.1	8.4	-	8.6	8.8	9.1	-	9.2	9.4	9.7	-	9.7	10.0	10.3	-	10.3	10.6	10.9	-																											
	840	Hi PR	214	231	244	-	241	259	273	-	274	294	311	-	312	335	354	-	351	377	398	-	387	417	440	-																											
		Lo PR	100	107	117	-	106	113	123	-	110	117	128	-	116	123	134	-	121	129	141	-	125	134	146	-																											
		MBh	26.4	27.4	30.0	-	25.8	26.8	29.3	-	25.2	26.1	28.6	-	24.6	25.5	27.9	-	23.4	24.2	26.5	-	21.7	22.4	24.6	-																											
		S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-																											
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-																											
1125	875	kW	1.90	1.94	1.99	-	2.04	2.08	2.14	-	2.16	2.20	2.27	-	2.26	2.31	2.38	-	2.35	2.40	2.47	-	2.43	2.48	2.56	-																											
		Amps	7.4	7.5	7.8	-	7.9	8.1	8.4	-	8.6	8.8	9.1	-	9.2	9.4	9.7	-	9.7	10.0	10.3	-	10.3	10.6	10.9	-																											
		Hi PR	214	231	244	-	241	259	273	-	274	294	311	-	312	335	354	-	351	377	398	-	387	417	440	-																											
		Lo PR	100	107	117	-	106	113	123	-	110	117	128	-	116	123	134	-	121	129	141	-	125	134	146	-																											
		MBh	27.4	28.4	31.1	-	26.7	27.7	30.4	-	26.1	27.1	29.6	-	25.5	26.4	28.9	-	24.2	25.1	27.5	-	22.4	23.2	25.4	-																											
	1125	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-																											
		ΔT	16	14	11	-	17	14	11	-	17	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-																											
		kW	1.93	1.97	2.02	-	2.07	2.11	2.17	-	2.19	2.23	2.30	-	2.30	2.34	2.42	-	2.39	2.44	2.51	-	2.47	2.52	2.60	-																											
		Amps	7.5	7.7	7.9	-	8.1	8.3	8.5	-	8.8	9.0	9.2	-	9.3	9.6	9.9	-	9.9	10.2	10.5	-	10.5	10.7	11.1	-																											
		Hi PR	219	235	249	-	245	264	279	-	279	300	317	-	318	342	361	-	358	385	406	-	395	425	449	-																											
Lo PR	102	109	119	-	108	115	126	-	112	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-																													
75	875	MBh	26.9	27.7	30.0	32.2	26.3	27.0	29.3	31.4	25.6	26.4	28.6	30.7	25.0	25.8	27.9	29.9	23.8	24.5	26.5	28.4	22.0	22.7	24.5	26.3																											
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.90	0.80	0.61	0.39																											
		ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11																											
		kW	1.91	1.95	2.01	2.07	2.05	2.09	2.16	2.22	2.17	2.22	2.28	2.36	2.28	2.33	2.40	2.47	2.37	2.42	2.50	2.57	2.45	2.50	2.58	2.66																											
		Amps	7.4	7.6	7.8	8.1	8.0	8.2	8.5	8.8	8.7	8.9	9.2	9.5	9.3	9.5	9.8	10.1	9.8	10.1	10.4	10.8	10.4	10.6	11.0	11.4																											
	840	Hi PR	217	233	246	257	243	262	276	288	276	297	314	328	315	339	358	373	354	381	403	420	391	421	445	464																											
		Lo PR	101	108	118	125	107	114	124	133	111	118	129	138	117	124	136	145	123	130	142	152	127	135	147	157																											
		MBh	26.9	27.7	30.0	32.2	26.3	27.0	29.3	31.4	25.6	26.4	28.6	30.7	25.0	25.8	27.9	29.9	23.8	24.5	26.5	28.4	22.0	22.7	24.5	26.3																											
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.90	0.80	0.61	0.39																											
		ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11																											
1125	kW	1.91	1.95	2.01	2.07	2.05	2.09	2.16	2.22	2.17	2.22	2.28	2.36	2.28	2.33	2.40	2.47	2.37	2.42	2.50	2.57	2.45	2.50	2.58	2.66																												
	Amps	7.4	7.6	7.8	8.1	8.0	8.2	8.5	8.8	8.7	8.9	9.2	9.5	9.3	9.5	9.8	10.1	9.8	10.1	10.4	10.8	10.4	10.6	11.0	11.4																												
	Hi PR	217	233	246	257	243	262	276	288	276	297	314	328	315	339	358	373	354	381	403	420	391	421	445	464																												
	Lo PR	101	108	118	125	107	114	124	133	111	118	129	138	117	124	136	145	123	130	142	152	127	135	147	157																												
	MBh	27.8	28.7	31.0	33.3	27.2	28.0	30.3	32.5	26.5	27.3	29.6	31.7	25.9	26.7	28.9	31.0	24.6	25.3	27.4	29.4	22.8	23.5	25.4	27.3																												
1125	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41																												
	ΔT	19	17	14	10	19	18	14	10	19	18	14	10	19	18	15	10	19	17	14	10	18	16	13	9																												
	kW	1.94	1.98	2.04	2.10	2.08	2.12	2.19	2.26	2.21	2.25	2.32	2.39	2.31	2.36	2.44	2.51	2.41	2.46	2.53	2.62	2.49	2.54	2.62	2.70																												
	Amps	7.6	7.7	8.0	8.3	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.7	9.4	9.6	10.0	10.3	10.0	10.2	10.6	11.0	10.6	10.8	11.2	11.6																												
	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	346	365	381	361	389	411	428	399	430	454	473																												
Lo PR	103	110	120	128	109	116	127	135	114	121	132	140	119	127	139	148	125	133	145	155	129	138	150	160																													
IDB: Entering Indoor Dry Bulb Temperature																		Shaded area reflects ACCA (TVA) conditions																		kW= Total system power																	
High and low pressures are measured at the liquid and suction service valves.																		Amps = outdoor unit amps (comp.+fan)																																			

COOLING DATA — DZ14SA0301A* / ARPT30B14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
875	MBh	27.4	28.0	29.9	31.9	26.7	27.3	29.2	31.2	26.1	26.7	28.5	30.5	25.5	26.0	27.8	29.7	24.2	24.7	26.4	28.2	22.4	22.9	24.5	26.2	22.4	22.9	24.5	26.2								
	S/T	0.86	0.80	0.65	0.49	0.89	0.83	0.68	0.51	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56								
	ΔT	25	24	20	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	16	23	22	19	23	22	19	15									
	kW	1.93	1.97	2.02	2.09	2.07	2.11	2.17	2.24	2.19	2.23	2.30	2.37	2.30	2.34	2.42	2.49	2.39	2.44	2.52	2.60	2.47	2.52	2.60	2.68	2.47	2.52	2.60	2.68								
	Amps	7.5	7.7	7.9	8.2	8.1	8.3	8.5	8.8	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.2	10.5	10.9	10.5	10.7	11.1	10.5	10.7	11.1	11.5									
	Hi PR	219	235	249	259	246	264	279	291	279	300	317	331	318	342	361	377	358	385	407	424	395	425	449	469	395	425	449	469								
	Lo PR	102	109	119	127	108	115	126	134	112	120	131	139	118	126	137	146	124	132	144	153	128	136	149	158	128	136	149	158								
80	MBh	27.4	28.0	29.9	31.9	26.7	27.3	29.2	31.2	26.1	26.7	28.5	30.5	25.5	26.0	27.8	29.7	24.2	24.7	26.4	28.2	22.4	22.9	24.5	26.2	22.4	22.9	24.5	26.2								
	S/T	0.86	0.80	0.65	0.49	0.89	0.83	0.68	0.51	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56								
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16	24	23	20	16								
	kW	1.93	1.97	2.02	2.09	2.07	2.11	2.17	2.24	2.19	2.23	2.30	2.37	2.30	2.34	2.42	2.49	2.39	2.44	2.52	2.60	2.47	2.52	2.60	2.68	2.47	2.52	2.60	2.68								
	Amps	7.5	7.7	7.9	8.2	8.1	8.3	8.5	8.8	8.8	9.0	9.3	9.6	9.3	9.6	9.9	10.2	9.9	10.2	10.5	10.9	10.5	10.7	11.1	10.5	10.7	11.1	11.5									
	Hi PR	219	235	249	259	246	264	279	291	279	300	317	331	318	342	361	377	358	385	407	424	395	425	449	469	395	425	449	469								
	Lo PR	102	109	119	127	108	115	126	134	112	120	131	139	118	126	137	146	124	132	144	153	128	136	149	158	128	136	149	158								
1125	MBh	28.3	29.0	30.9	33.1	27.7	28.3	30.2	32.3	27.0	27.6	29.5	31.5	26.4	26.9	28.8	30.8	25.0	25.6	27.3	29.2	23.2	23.7	25.3	27.1	23.2	23.7	25.3	27.1								
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.80	0.60	1.00	1.00	0.80	0.60								
	ΔT	21	20	18	14	21	20	18	14	21	20	18	14	22	21	18	14	20	21	18	14	19	19	16	13	19	19	16	13								
	kW	1.96	2.00	2.05	2.12	2.10	2.14	2.21	2.27	2.22	2.27	2.34	2.41	2.33	2.38	2.46	2.53	2.43	2.48	2.56	2.64	2.51	2.56	2.64	2.73	2.51	2.56	2.64	2.73								
	Amps	7.6	7.8	8.1	8.3	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.8	9.5	9.7	10.0	10.4	10.1	10.3	10.7	11.1	10.7	10.9	11.3	11.7	10.7	10.9	11.3	11.7								
	Hi PR	223	240	254	265	250	269	285	297	285	307	324	338	324	349	369	384	365	393	415	433	403	434	458	478	403	434	458	478								
	Lo PR	104	111	121	129	110	117	128	137	115	122	133	142	120	128	140	149	126	134	147	156	131	139	152	162	131	139	152	162								
85	MBh	27.9	28.4	29.7	31.7	27.2	27.7	29.0	31.0	26.6	27.1	28.4	30.2	25.9	26.4	27.7	29.5	24.6	25.1	26.3	28.0	22.8	23.2	24.3	26.0	22.8	23.2	24.3	26.0								
	S/T	0.90	0.86	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.90	0.73	1.00	0.99	0.90	0.73								
	ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	20	24	24	23	20								
	kW	1.94	1.98	2.04	2.10	2.08	2.12	2.19	2.26	2.21	2.25	2.32	2.39	2.31	2.36	2.44	2.51	2.41	2.46	2.54	2.62	2.49	2.54	2.62	2.71	2.49	2.54	2.62	2.71								
	Amps	7.6	7.7	8.0	8.3	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.7	9.4	9.6	10.0	10.3	10.0	10.2	10.6	11.0	10.6	10.8	11.2	11.6	10.6	10.8	11.2	11.6								
	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	346	365	381	361	389	411	428	399	430	454	473	399	430	454	473								
	Lo PR	103	110	120	128	109	116	127	135	114	121	132	140	119	127	139	148	125	133	145	155	129	138	150	160	129	138	150	160								
840	MBh	27.9	28.4	29.7	31.7	27.2	27.7	29.0	31.0	26.6	27.1	28.4	30.2	25.9	26.4	27.7	29.5	24.6	25.1	26.3	28.0	22.8	23.2	24.3	26.0	22.8	23.2	24.3	26.0								
	S/T	0.90	0.86	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.90	0.73	1.00	0.99	0.90	0.73								
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	26	22	25	25	24	21	25	25	24	21								
	kW	1.94	1.98	2.04	2.10	2.08	2.12	2.19	2.26	2.21	2.25	2.32	2.39	2.31	2.36	2.44	2.51	2.41	2.46	2.54	2.62	2.49	2.54	2.62	2.71	2.49	2.54	2.62	2.71								
	Amps	7.6	7.7	8.0	8.3	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.7	9.4	9.6	10.0	10.3	10.0	10.2	10.6	11.0	10.6	10.8	11.2	11.6	10.6	10.8	11.2	11.6								
	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	346	365	381	361	389	411	428	399	430	454	473	399	430	454	473								
	Lo PR	103	110	120	128	109	116	127	135	114	121	132	140	119	127	139	148	125	133	145	155	129	138	150	160	129	138	150	160								
1125	MBh	28.8	29.4	30.8	32.8	28.2	28.7	30.1	32.1	27.5	28.0	29.3	31.3	26.8	27.3	28.6	30.5	25.5	26.0	27.2	29.0	23.6	24.1	25.2	26.9	23.6	24.1	25.2	26.9								
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77								
	ΔT	22	22	21	18	23	22	21	18	22	22	21	18	22	22	21	18	21	21	21	18	19	20	20	17	19	20	20	17								
	kW	1.97	2.01	2.07	2.13	2.11	2.16	2.22	2.29	2.24	2.29	2.36	2.43	2.35	2.40	2.48	2.55	2.45	2.50	2.58	2.66	2.53	2.58	2.66	2.75	2.53	2.58	2.66	2.75								
	Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.6	9.8	10.1	10.5	10.2	10.4	10.8	11.2	10.8	11.0	11.4	11.8	10.8	11.0	11.4	11.8								
	Hi PR	225	243	256	267	253	272	287	300	288	310	327	341	328	353	372	388	369	397	419	437	407	438	463	483	407	438	463	483								
	Lo PR	106	112	123	131	111	119	129	138	116	123	135	143	122	129	141	151	128	136	148	158	132	140	153	163	132	140	153	163								
IDB: Entering Indoor Dry Bulb Temperature		Shaded area reflects AHRI conditions																		kW= Total system power																	
High and low pressures are measured at the liquid and suction service valves.		Amps = outdoor unit amps (comp.+fan)																																			

kW= Total system power
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects AHRI conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

COOLING DATA — DZ14SA0361A* / ARPT36D14**

		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1050	MBh	31.3	32.4	35.5	-	30.6	31.7	34.7	-	29.8	30.9	33.9	-	29.1	30.2	33.1	-	27.7	28.7	31.4	-	25.6	26.6	29.1	-	25.6	26.6	29.1	-	
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	0.81	0.67	0.47	-	
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-	
		kW	2.28	2.32	2.39	-	2.43	2.48	2.55	-	2.57	2.62	2.70	-	2.69	2.74	2.82	-	2.79	2.85	2.93	-	2.88	2.94	3.03	-	2.88	2.94	3.03	-	
		Amps	8.6	8.8	9.1	-	9.3	9.5	9.8	-	10.0	10.2	10.6	-	10.7	10.9	11.3	-	11.3	11.6	11.9	-	11.9	12.2	12.6	-	11.9	12.2	12.6	-	
		Hi PR	218	235	248	-	245	263	278	-	278	299	316	-	317	341	360	-	357	384	405	-	394	424	448	-	394	424	448	-	
		Lo PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	139	-	126	134	146	-	130	138	151	-	130	138	151	-	
		MBh	31.8	32.9	36.1	-	31.0	32.2	35.2	-	30.3	31.4	34.4	-	29.6	30.6	33.6	-	28.1	29.1	31.9	-	26.0	27.0	29.5	-	26.0	27.0	29.5	-	
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.83	0.70	0.48	-	0.83	0.70	0.48	-	
		ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	18	15	12	-	
70	1120	kW	2.31	2.35	2.42	-	2.46	2.51	2.58	-	2.60	2.65	2.73	-	2.72	2.78	2.86	-	2.83	2.88	2.97	-	2.92	2.98	3.07	-	2.92	2.98	3.07	-	
		Amps	8.7	8.9	9.2	-	9.4	9.6	9.9	-	10.2	10.4	10.7	-	10.8	11.1	11.4	-	11.5	11.7	12.1	-	12.1	12.4	12.8	-	12.1	12.4	12.8	-	
		Hi PR	222	239	252	-	249	268	283	-	283	305	322	-	322	347	366	-	363	390	412	-	401	431	455	-	401	431	455	-	
		Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	132	141	154	-	132	141	154	-	
		MBh	32.9	34.1	37.3	-	32.1	33.3	36.5	-	31.4	32.5	35.6	-	30.6	31.7	34.7	-	29.1	30.1	33.0	-	26.9	27.9	30.6	-	26.9	27.9	30.6	-	
		S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.89	0.74	0.51	-	0.89	0.74	0.51	-	
		ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	16	14	11	-	
		kW	2.34	2.38	2.45	-	2.50	2.55	2.62	-	2.64	2.69	2.77	-	2.76	2.82	2.90	-	2.87	2.93	3.02	-	2.96	3.02	3.11	-	2.96	3.02	3.11	-	
		Amps	8.9	9.1	9.4	-	9.6	9.8	10.1	-	10.3	10.6	10.9	-	11.0	11.3	11.6	-	11.7	12.0	12.3	-	12.3	12.6	13.0	-	12.3	12.6	13.0	-	
		Hi PR	226	244	257	-	254	273	289	-	289	311	328	-	329	354	374	-	370	398	420	-	409	440	465	-	409	440	465	-	
Lo PR	108	115	125	-	114	121	132	-	119	126	138	-	125	132	145	-	131	139	152	-	135	144	157	-	135	144	157	-			
75	1050	MBh	31.8	32.8	35.5	38.1	31.1	32.0	34.6	37.2	30.3	31.2	33.8	36.3	29.6	30.5	33.0	35.4	28.1	29.0	31.3	33.6	26.1	26.8	29.0	31.2	26.1	26.8	29.0	31.2	
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.40	0.92	0.82	0.62	0.40	0.92	0.82	0.62	0.40	
		ΔT	22	20	17	12	22	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11	21	19	16	11	
		kW	2.30	2.34	2.40	2.47	2.45	2.50	2.57	2.64	2.59	2.64	2.72	2.80	2.71	2.76	2.84	2.93	2.81	2.87	2.95	3.05	2.90	2.96	3.05	3.14	2.90	2.96	3.05	3.14	
		Amps	8.7	8.9	9.2	9.5	9.3	9.6	9.9	10.2	10.1	10.3	10.7	11.0	10.8	11.0	11.4	11.8	11.4	11.7	12.0	12.5	12.1	12.3	12.7	13.2	12.1	12.3	12.7	13.2	
		Hi PR	220	237	250	261	247	266	281	293	281	303	319	333	320	345	364	380	360	388	409	427	398	428	452	472	398	428	452	472	
		Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163	131	140	153	163	
		MBh	32.3	33.3	36.0	38.7	31.6	32.5	35.2	37.8	30.8	31.7	34.3	36.9	30.1	30.9	33.5	36.0	28.6	29.4	31.8	34.2	26.5	27.2	29.5	31.6	26.5	27.2	29.5	31.6	
		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.61	0.39	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	
		ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	16	11	21	19	16	11	
75	1120	kW	2.32	2.37	2.43	2.50	2.48	2.53	2.60	2.68	2.62	2.67	2.75	2.83	2.74	2.80	2.88	2.97	2.85	2.91	2.99	3.09	2.94	3.00	3.09	3.19	2.94	3.00	3.09	3.19	
		Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.8	11.2	10.9	11.2	11.5	11.9	11.6	11.9	12.2	12.7	12.2	12.5	12.9	13.4	12.2	12.5	12.9	13.4	
		Hi PR	224	241	255	266	251	271	286	298	286	308	325	339	326	351	370	386	366	394	416	434	405	436	460	480	405	436	460	480	
		Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	153	129	138	150	160	134	142	155	165	134	142	155	165	
		MBh	33.4	34.4	37.3	40.0	32.7	33.6	36.4	39.1	31.9	32.8	35.5	38.1	31.1	32.0	34.7	37.2	29.6	30.4	32.9	35.4	27.4	28.2	30.5	32.7	27.4	28.2	30.5	32.7	
		S/T	0.88	0.79	0.59	0.38	0.91	0.81	0.62	0.40	0.93	0.83	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.89	0.68	0.44	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44	
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	10	19	17	14	10	19	17	14	10	
		kW	2.36	2.40	2.47	2.54	2.52	2.57	2.64	2.72	2.66	2.71	2.79	2.88	2.79	2.84	2.93	3.02	2.89	2.95	3.04	3.13	2.98	3.05	3.14	3.24	2.98	3.05	3.14	3.24	
		Amps	9.0	9.2	9.4	9.8	9.6	9.9	10.2	10.5	10.4	10.7	11.0	11.4	11.1	11.4	11.7	12.1	11.8	12.1	12.4	12.9	12.5	12.7	13.2	13.6	12.5	12.7	13.2	13.6	
		Hi PR	229	246	260	271	257	276	291	304	292	314	332	346	332	358	378	394	374	402	425	443	413	444	469	489	413	444	469	489	
Lo PR	109	116	127	135	115	123	134	143	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	136	145	158	169			
IDB: Entering Indoor Dry Bulb Temperature		Shaded area reflects ACCA (TVA) conditions																												kW= Total system power	
		High and low pressures are measured at the liquid and suction service valves.																												Amps = outdoor unit amps (comp.+fan)	

COOLING DATA — DZ14SA0361A* / ARPT36D14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1050	MBh	32.4	33.1	35.4	37.8	31.6	32.3	34.5	36.9	30.9	31.6	33.7	36.0	30.1	30.8	32.9	35.2	28.6	29.3	31.3	33.4	26.5	27.1	29.0	30.9	26.5	27.1	29.0	30.9							
		S/T	0.87	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57	1.00	0.94	0.77	0.57							
		ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16							
		kW	2.31	2.36	2.42	2.49	2.47	2.52	2.59	2.66	2.61	2.66	2.74	2.82	2.73	2.78	2.87	2.95	2.83	2.89	2.98	3.07	2.92	2.98	3.07	3.17	2.92	2.98	3.07	3.17							
	Amps	8.8	9.0	9.2	9.6	9.4	9.6	9.9	10.3	10.2	10.4	10.8	11.1	10.9	11.1	11.5	11.9	11.5	11.8	12.2	12.6	12.2	12.4	12.8	13.3	12.2	12.4	12.8	13.3								
	Hi PR	223	239	253	264	250	269	284	296	284	306	323	337	323	348	368	383	364	392	413	431	402	433	457	477	402	433	457	477								
	Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	122	130	142	151	128	137	149	159	133	141	154	164	133	141	154	164								
	1120	MBh	32.9	33.6	35.9	38.4	32.1	32.8	35.1	37.5	31.4	32.0	34.2	36.6	30.6	31.3	33.4	35.7	29.1	29.7	31.7	33.9	26.9	27.5	29.4	31.4	26.9	27.5	29.4	31.4							
S/T		0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	0.99	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.79	0.59	1.00	0.98	0.79	0.59								
ΔT		24	23	20	16	25	24	21	16	25	24	21	17	25	24	21	17	24	24	21	16	22	22	19	15	22	22	19	15								
kW		2.34	2.38	2.45	2.52	2.50	2.55	2.62	2.70	2.64	2.69	2.77	2.85	2.76	2.82	2.90	2.99	2.87	2.93	3.02	3.11	2.96	3.02	3.11	3.21	2.96	3.02	3.11	3.21								
1350	Amps	8.9	9.1	9.4	9.7	9.6	9.8	10.1	10.4	10.3	10.6	10.9	11.3	11.0	11.3	11.6	12.0	11.7	12.0	12.3	12.8	12.3	12.6	13.0	13.5	12.3	12.6	13.0	13.5								
	Hi PR	226	244	257	268	254	273	289	301	289	311	328	342	329	354	374	390	370	398	421	439	409	440	465	485	409	440	465	485								
	Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167								
	MBh	34.0	34.8	37.2	39.7	33.2	34.0	36.3	38.8	32.5	33.2	35.4	37.9	31.7	32.4	34.6	37.0	30.1	30.7	32.8	35.1	27.9	28.5	30.4	32.5	27.9	28.5	30.4	32.5								
85	1050	S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63							
		ΔT	22	21	19	15	23	22	19	15	22	22	19	15	22	22	19	15	20	21	19	15	19	19	17	14	19	17	14								
		kW	2.37	2.42	2.49	2.56	2.54	2.58	2.66	2.74	2.68	2.73	2.81	2.90	2.81	2.86	2.95	3.04	2.91	2.97	3.06	3.16	3.01	3.07	3.16	3.26	3.01	3.07	3.16	3.26							
		Amps	9.0	9.2	9.5	9.9	9.7	10.0	10.3	10.6	10.5	10.8	11.1	11.5	11.2	11.5	11.8	12.3	11.9	12.2	12.6	13.0	12.6	12.9	13.3	13.8	12.6	12.9	13.3	13.8							
	Hi PR	231	248	262	274	259	279	294	307	295	317	335	349	336	361	381	398	378	406	429	447	417	449	474	494	417	449	474	494								
	Lo PR	110	117	128	136	116	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	170	138	147	160	170								
	1120	MBh	33.0	33.6	35.2	37.5	32.2	32.8	34.4	36.7	31.4	32.0	33.6	35.8	30.7	31.3	32.7	34.9	29.1	29.7	31.1	33.2	27.0	27.5	28.8	30.7	27.0	27.5	28.8	30.7							
		S/T	0.92	0.88	0.80	0.65	0.95	0.92	0.83	0.67	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.74							
ΔT		26	26	25	21	27	26	25	22	27	26	25	22	27	27	25	22	26	26	25	21	24	24	23	20	24	24	23	20								
kW		2.33	2.37	2.44	2.51	2.49	2.53	2.61	2.68	2.63	2.68	2.76	2.84	2.75	2.81	2.89	2.98	2.86	2.91	3.00	3.09	2.95	3.01	3.10	3.19	2.95	3.01	3.10	3.19								
1350	Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.8	11.2	10.9	11.2	11.6	12.0	11.6	11.9	12.3	12.7	12.3	12.6	13.0	13.4	12.3	12.6	13.0	13.4								
	Hi PR	225	242	255	266	252	271	287	299	287	309	326	340	327	352	371	387	368	395	418	436	406	437	461	481	406	437	461	481								
	Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166	134	143	156	166								
	MBh	33.5	34.1	35.7	38.1	32.7	33.3	34.9	37.2	31.9	32.5	34.1	36.3	31.1	31.7	33.2	35.5	29.6	30.1	31.6	33.7	27.4	27.9	29.2	31.2	27.4	27.9	29.2	31.2								
85	1120	S/T	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.70	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77							
		ΔT	26	26	24	21	26	26	25	21	26	26	25	21	26	26	25	21	24	25	24	21	22	23	20	22	23	23	20								
		kW	2.36	2.40	2.47	2.54	2.52	2.57	2.64	2.72	2.66	2.71	2.79	2.88	2.79	2.84	2.93	3.02	2.89	2.95	3.04	3.13	2.98	3.05	3.14	3.24	2.98	3.05	3.14	3.24							
		Amps	9.0	9.2	9.5	9.8	9.6	9.9	10.2	10.5	10.4	10.7	11.0	11.4	11.1	11.4	11.7	12.2	11.8	12.1	12.4	12.9	12.5	12.7	13.2	13.6	12.5	12.7	13.2	13.6							
1350	Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	332	358	378	394	374	402	425	443	413	445	469	490	413	445	469	490								
	Lo PR	109	116	127	135	115	123	134	143	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	136	145	158	169								
	MBh	34.6	35.3	37.0	39.4	33.8	34.5	36.1	38.5	33.0	33.7	35.3	37.6	32.2	32.8	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	28.4	28.9	30.3	32.3								
	S/T	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.76	1.00	1.00	0.96	0.78	1.00	1.00	0.94	0.81	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77								
85	1350	ΔT	24	23	22	19	23	23	22	19	22	23	22	19	22	22	23	20	21	21	22	19	20	21	18	19	20	21	18								
		kW	2.39	2.44	2.50	2.58	2.55	2.60	2.68	2.76	2.70	2.75	2.83	2.92	2.83	2.88	2.97	3.06	2.94	3.00	3.09	3.18	3.03	3.09	3.19	3.29	3.03	3.09	3.19	3.29							
		Amps	9.1	9.3	9.6	9.9	9.8	10.0	10.3	10.7	10.6	10.9	11.2	11.6	11.3	11.6	11.9	12.4	12.0	12.3	12.7	13.1	12.7	13.0	13.4	13.9	12.7	13.0	13.4	13.9							
		Hi PR	233	251	265	276	262	282	297	310	298	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499	421	453	479	499							
85	1350	Lo PR	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	135	143	156	166	139	148	162	172	139	148	162	172							
		Shaded area reflects AHRI conditions																		kW= Total system power Amps = outdoor unit amps (comp.+fan)																	
		IDB: Entering Indoor Dry Bulb Temperature																		IDB: Entering Indoor Dry Bulb Temperature																	
		High and low pressures are measured at the liquid and suction service valves.																		High and low pressures are measured at the liquid and suction service valves.																	

SS-DZ14SA

COOLING DATA — DZ14SA0381A* / ASPT42C14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1050	MBh	31.4	32.1	34.3	36.7	30.7	31.4	33.5	35.8	30.0	30.6	32.7	35.0	29.2	29.9	31.9	34.1	27.8	28.4	30.3	32.4	25.7	26.3	28.1	30.0	25.7	26.3	28.1	30.0							
		S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.01	0.95	0.77	0.58	1.01	0.95	0.77	0.58							
		ΔT	24	23	20	16	25	23	20	16	25	24	20	16	25	24	21	16	24	23	20	16	23	22	19	15	23	22	19	15							
		kW	2.68	2.68	2.68	2.68	2.68	2.68	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69							
		Amps	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1							
		Hi PR	216	232	245	256	242	261	275	287	275	296	313	326	314	338	356	372	353	380	401	418	390	420	443	462	390	420	443	462							
	1175	Lo PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164	132	141	154	164							
		MBh	33.1	33.8	36.1	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	30.8	31.4	33.6	35.9	29.2	29.9	31.9	34.1	27.1	27.7	29.6	31.6	27.1	27.7	29.6	31.6							
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.74	0.56	1.00	0.94	0.77	0.57	1.00	0.98	0.80	0.60	1.00	0.99	0.80	0.60	1.00	0.99	0.80	0.60							
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15	21	21	19	15							
1350	kW	2.68	2.68	2.68	2.68	2.68	2.68	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69								
	Amps	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2								
	Hi PR	220	237	250	261	247	266	281	293	281	302	319	333	320	344	364	379	360	387	409	427	398	428	452	472	398	428	452	472								
	Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167								
	MBh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.5	32.6	27.9	28.5	30.5	32.6								
	S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63								
85	1050	ΔT	22	21	19	15	23	22	19	15	22	22	19	15	22	22	19	15	21	21	19	15	19	18	14	19	19	18	14								
		kW	2.68	2.68	2.68	2.68	2.68	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69								
		Amps	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2							
		Hi PR	218	235	248	258	245	263	278	290	278	299	316	330	317	341	360	375	356	384	405	422	394	424	447	467	394	424	447	467							
		Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	153	129	137	150	160	134	142	155	165	134	142	155	165							
		MBh	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.5	32.1	32.7	34.3	36.6	31.3	31.9	33.4	35.7	29.7	30.3	31.8	33.9	27.6	28.1	29.4	31.4	27.6	28.1	29.4	31.4							
	1175	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78							
		ΔT	25	25	24	20	26	25	24	21	25	25	24	21	25	25	24	21	23	24	24	21	22	22	22	19	22	22	19	21							
		kW	2.68	2.68	2.68	2.68	2.68	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69							
		Amps	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2							
1350	Hi PR	222	239	253	264	250	269	284	296	284	305	323	336	323	348	367	383	364	391	413	431	402	432	457	476	402	432	457	476								
	Lo PR	109	116	127	135	115	123	134	143	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	136	145	158	169								
	MBh	34.7	35.3	37.0	39.5	33.9	34.5	36.2	38.6	33.1	33.7	35.3	37.7	32.3	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	28.4	28.9	30.3	32.3								
	S/T	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.76	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78								
1350	ΔT	24	23	22	19	23	24	22	19	23	23	22	19	22	22	23	20	21	21	22	19	19	20	21	18	19	20	21	18								
	kW	2.68	2.68	2.68	2.69	2.68	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69	2.69								
	Amps	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2								
	Hi PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481	406	437	461	481								
	Lo PR	110	117	128	136	116	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	170	138	147	160	170								
	Shaded area reflects AHRI conditions																		kW= Total system power Amps = outdoor unit amps (comp.+fan)																		
IDB: Entering Indoor Dry Bulb Temperature		High and low pressures are measured at the liquid and suction service valves.																																			

COOLING DATA — DZ14SA0421A* / ARPT42D14**

		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	MBh	37.5	38.9	42.6	-	36.6	37.9	41.6	-	35.7	37.0	40.6	-	34.9	36.1	39.6	-	33.1	34.3	37.6	-	30.7	31.8	34.8	-	30.7	31.8	34.8	-		
	S/T	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.76	0.64	0.44	-	0.76	0.64	0.44	-		
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-		
	kW	2.70	2.75	2.83	-	2.89	2.95	3.04	-	3.06	3.12	3.22	-	3.21	3.28	3.38	-	3.34	3.41	3.51	-	3.45	3.52	3.63	-	3.45	3.52	3.63	-		
	Amps	10.2	10.4	10.7	-	11.0	11.2	11.6	-	11.9	12.2	12.6	-	12.7	13.0	13.4	-	13.5	13.8	14.3	-	14.3	14.7	15.1	-	14.3	14.7	15.1	-		
	Hi PR	217	233	246	-	243	262	277	-	277	298	314	-	315	339	358	-	355	382	403	-	392	422	445	-	392	422	445	-		
	Lo PR	102	108	118	-	107	114	125	-	112	119	130	-	117	125	136	-	123	131	143	-	127	135	148	-	127	135	148	-		
	MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-	31.2	32.3	35.4	-		
1330	S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-		
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-		
	kW	2.73	2.79	2.87	-	2.93	2.99	3.08	-	3.10	3.16	3.26	-	3.25	3.32	3.42	-	3.38	3.45	3.56	-	3.49	3.57	3.68	-	3.49	3.57	3.68	-		
	Amps	10.3	10.6	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	12.9	13.2	13.7	-	13.7	14.1	14.5	-	14.5	14.9	15.4	-	14.5	14.9	15.4	-		
	Hi PR	221	237	251	-	248	266	281	-	282	303	320	-	321	345	364	-	361	388	410	-	399	429	453	-	399	429	453	-		
	Lo PR	103	110	120	-	109	116	127	-	114	121	132	-	119	127	139	-	125	133	145	-	129	138	150	-	129	138	150	-		
	MBh	39.2	40.6	44.5	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	36.5	37.8	41.4	-	34.6	35.9	39.3	-	32.1	33.3	36.4	-	32.1	33.3	36.4	-		
	S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-		
1575	ΔT	17	14	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	14	11	-	16	13	10	-	16	13	10	-		
	kW	2.75	2.81	2.89	-	2.95	3.01	3.10	-	3.12	3.19	3.29	-	3.28	3.35	3.45	-	3.41	3.48	3.59	-	3.52	3.60	3.71	-	3.52	3.60	3.71	-		
	Amps	10.4	10.7	11.0	-	11.2	11.5	11.9	-	12.2	12.5	12.9	-	13.0	13.3	13.8	-	13.8	14.2	14.7	-	14.7	15.0	15.5	-	14.7	15.0	15.5	-		
	Hi PR	223	240	253	-	250	269	284	-	284	306	323	-	324	349	368	-	364	392	414	-	403	433	457	-	403	433	457	-		
	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	121	128	140	-	126	134	147	-	131	139	152	-	131	139	152	-		
	75	MBh	38.1	39.2	42.5	45.6	37.2	38.3	41.5	44.5	36.3	37.4	40.5	43.5	35.5	36.5	39.5	42.4	33.7	34.7	37.5	40.3	31.2	32.1	34.8	37.3	31.2	32.1	34.8	37.3	
		S/T	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.87	0.78	0.59	0.38	0.87	0.78	0.59	0.38	
		ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11	20	19	15	11	
kW		2.72	2.77	2.85	2.94	2.91	2.97	3.06	3.15	3.08	3.15	3.24	3.34	3.24	3.30	3.40	3.51	3.36	3.43	3.54	3.65	3.47	3.55	3.66	3.78	3.47	3.55	3.66	3.78		
Amps		10.3	10.5	10.8	11.2	11.1	11.3	11.7	12.1	12.0	12.3	12.7	13.2	12.8	13.1	13.6	14.1	13.6	14.0	14.4	15.0	14.4	14.8	15.3	15.9	14.4	14.8	15.3	15.9		
Hi PR		219	236	249	260	246	265	279	291	280	301	318	331	318	343	362	377	358	385	407	425	396	426	450	469	396	426	450	469		
Lo PR		103	109	119	127	109	115	126	134	113	120	131	140	118	126	138	147	124	132	144	154	128	137	149	159	128	137	149	159		
MBh		38.7	39.8	43.1	46.3	37.8	38.9	42.1	45.2	36.9	38.0	41.1	44.1	36.0	37.1	40.1	43.1	34.2	35.2	38.1	40.9	31.7	32.6	35.3	37.9	31.7	32.6	35.3	37.9		
1330	S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39	0.90	0.81	0.61	0.39		
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10	20	18	15	10		
	kW	2.75	2.81	2.89	2.98	2.95	3.01	3.10	3.20	3.13	3.19	3.29	3.39	3.28	3.35	3.45	3.56	3.41	3.48	3.59	3.70	3.52	3.60	3.71	3.83	3.52	3.60	3.71	3.83		
	Amps	10.4	10.7	11.0	11.4	11.2	11.5	11.9	12.3	12.2	12.5	12.9	13.4	13.0	13.3	13.8	14.3	13.9	14.2	14.7	15.2	14.7	15.0	15.5	16.1	14.7	15.0	15.5	16.1		
	Hi PR	223	240	253	264	250	269	284	296	284	306	323	337	324	349	368	384	364	392	414	432	403	433	458	477	403	433	458	477		
	Lo PR	104	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	131	139	152	162		
	MBh	39.9	41.0	44.4	47.7	38.9	40.1	43.4	46.6	38.0	39.1	42.4	45.5	37.1	38.2	41.3	44.4	35.2	36.3	39.3	42.1	32.6	33.6	36.4	39.0	32.6	33.6	36.4	39.0		
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41		
1575	ΔT	19	18	14	10	19	18	15	10	19	18	15	10	20	18	15	10	19	18	15	10	18	17	14	9	18	17	14	9		
	kW	2.77	2.83	2.91	3.00	2.97	3.03	3.12	3.22	3.15	3.21	3.31	3.42	3.30	3.37	3.48	3.59	3.44	3.51	3.62	3.73	3.55	3.63	3.74	3.86	3.55	3.63	3.74	3.86		
	Amps	10.5	10.8	11.1	11.5	11.3	11.6	12.0	12.4	12.3	12.6	13.0	13.5	13.1	13.5	13.9	14.4	14.0	14.3	14.8	15.3	14.8	15.2	15.7	16.3	14.8	15.2	15.7	16.3		
	Hi PR	225	242	256	267	253	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	438	462	482	407	438	462	482		
	Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	132	140	153	163		
	kW= Total system power Amps = outdoor unit amps (comp.+fan)																														
	IDB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction service valves.																														
	Shaded area reflects ACCA (TVA) conditions																														

COOLING DATA — DZ14SA0421A* / ARPT42D14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE												115°F																	
		65°F						75°F						85°F						95°F						105°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	MBh	38.8	39.6	42.4	45.3	37.9	38.7	41.4	44.2	37.0	37.8	40.4	43.2	36.1	36.9	39.4	42.1	34.3	35.0	37.4	40.0	31.8	32.5	34.7	37.1	31.8	32.5	34.7	37.1		
	S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54	0.95	0.89	0.73	0.54		
	ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	16	24	23	20	16	23	22	19	15	23	22	19	15		
	kW	2.74	2.79	2.88	2.96	2.94	2.99	3.08	3.18	3.11	3.17	3.27	3.37	3.26	3.33	3.43	3.54	3.39	3.46	3.57	3.68	3.50	3.58	3.69	3.81	3.50	3.58	3.69	3.81		
	Amps	10.4	10.6	10.9	11.3	11.2	11.4	11.8	12.2	12.1	12.4	12.8	13.3	12.9	13.3	13.7	14.2	13.8	14.1	14.6	15.1	14.6	14.9	15.4	16.0	14.6	14.9	15.4	16.0		
	Hi PR	221	238	251	262	248	267	282	294	282	304	321	335	322	346	365	381	362	389	411	429	400	430	454	474	400	430	454	474		
	Lo PR	104	110	121	128	110	117	127	136	114	121	132	141	120	127	139	148	125	133	146	155	130	138	151	160	130	138	151	160		
	MBh	39.4	40.2	43.0	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	36.6	37.4	40.0	42.8	34.8	35.6	38.0	40.6	32.2	32.9	35.2	37.6	32.2	32.9	35.2	37.6		
	S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	0.99	0.93	0.75	0.56		
	ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	22	21	18	15		
85	kW	2.77	2.83	2.91	3.00	2.97	3.03	3.13	3.22	3.15	3.21	3.31	3.42	3.30	3.37	3.48	3.59	3.44	3.51	3.62	3.73	3.55	3.63	3.74	3.86	3.55	3.63	3.74	3.86		
	Amps	10.5	10.8	11.1	11.5	11.3	11.6	12.0	12.4	12.3	12.6	13.0	13.5	13.1	13.5	13.9	14.4	14.0	14.3	14.8	15.3	14.8	15.2	15.7	16.3	14.8	15.2	15.7	16.3		
	Hi PR	225	242	256	267	253	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	438	462	482	407	438	462	482		
	Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	132	140	153	163		
	MBh	40.6	41.5	44.3	47.3	39.6	40.5	43.3	46.2	38.7	39.5	42.2	45.1	37.7	38.6	41.2	44.0	35.9	36.6	39.1	41.8	33.2	33.9	36.3	38.8	33.2	33.9	36.3	38.8		
	S/T	0.90	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.79	0.59	1.00	1.00	0.79	0.59		
	ΔT	21	20	18	14	22	21	18	14	22	21	18	14	22	21	18	14	21	21	18	14	19	20	17	13	19	20	17	13		
	kW	2.80	2.85	2.93	3.02	3.00	3.06	3.15	3.25	3.17	3.24	3.34	3.44	3.33	3.40	3.51	3.62	3.46	3.54	3.65	3.77	3.58	3.65	3.77	3.89	3.58	3.65	3.77	3.89		
	Amps	10.6	10.9	11.2	11.6	11.4	11.7	12.1	12.5	12.4	12.7	13.1	13.6	13.3	13.6	14.0	14.6	14.1	14.4	14.9	15.5	14.9	15.3	15.8	16.4	14.9	15.3	15.8	16.4		
	Hi PR	227	245	258	269	255	275	290	302	290	312	330	344	330	356	376	392	372	400	422	441	411	442	467	487	411	442	467	487		
Lo PR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165	133	142	155	165			
85	MBh	39.5	40.2	42.1	45.0	38.6	39.3	41.2	43.9	37.6	38.4	40.2	42.9	36.7	37.4	39.2	41.8	34.9	35.6	37.2	39.7	32.3	32.9	34.5	36.8	32.3	32.9	34.5	36.8		
	S/T	0.87	0.84	0.76	0.62	0.90	0.87	0.79	0.64	0.93	0.89	0.81	0.65	0.96	0.92	0.83	0.67	0.99	0.96	0.86	0.70	1.00	0.96	0.87	0.71	1.00	0.96	0.87	0.71		
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	26	26	24	21	24	24	23	20	24	24	23	20		
	kW	2.76	2.81	2.90	2.98	2.96	3.02	3.11	3.20	3.13	3.20	3.29	3.40	3.29	3.35	3.46	3.57	3.42	3.49	3.60	3.71	3.53	3.60	3.72	3.84	3.53	3.60	3.72	3.84		
	Amps	10.4	10.7	11.0	11.4	11.3	11.5	11.9	12.4	12.2	12.5	12.9	13.4	13.1	13.4	13.8	14.3	13.9	14.2	14.7	15.2	14.7	15.1	15.6	16.2	14.7	15.1	15.6	16.2		
	Hi PR	223	241	254	265	251	270	285	297	285	307	324	338	325	350	369	385	365	393	415	433	404	435	459	479	404	435	459	479		
	Lo PR	105	111	122	130	111	118	129	137	115	122	134	142	121	129	140	150	127	135	147	157	131	139	152	162	131	139	152	162		
	MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4	32.8	33.4	35.0	37.4		
	S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73	1.00	1.00	0.90	0.73		
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	24	25	23	20	23	23	22	19	23	23	22	19		
85	kW	2.80	2.85	2.93	3.02	3.00	3.06	3.15	3.25	3.17	3.24	3.34	3.44	3.33	3.40	3.51	3.62	3.46	3.54	3.65	3.77	3.58	3.65	3.77	3.89	3.58	3.65	3.77	3.89		
	Amps	10.6	10.9	11.2	11.6	11.4	11.7	12.1	12.5	12.4	12.7	13.1	13.6	13.3	13.6	14.0	14.6	14.1	14.4	14.9	15.5	14.9	15.3	15.8	16.4	14.9	15.3	15.8	16.4		
	Hi PR	227	245	258	269	255	275	290	302	290	312	330	344	330	356	376	392	372	400	422	441	411	442	467	487	411	442	467	487		
	Lo PR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165	133	142	155	165		
	MBh	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	39.4	40.1	42.0	44.8	38.4	39.1	41.0	43.7	36.5	37.2	38.9	41.5	33.8	34.4	36.1	38.5	33.8	34.4	36.1	38.5		
	S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77		
	ΔT	23	22	21	18	23	23	21	19	23	23	21	19	22	23	22	19	21	22	21	18	20	20	20	17	20	20	20	17		
	kW	2.82	2.87	2.96	3.05	3.02	3.08	3.17	3.27	3.20	3.26	3.36	3.47	3.36	3.43	3.53	3.65	3.49	3.56	3.68	3.80	3.61	3.68	3.80	3.92	3.61	3.68	3.80	3.92		
	Amps	10.7	10.9	11.3	11.7	11.5	11.8	12.2	12.7	12.5	12.8	13.3	13.7	13.4	13.7	14.2	14.7	14.2	14.6	15.1	15.6	15.1	15.4	16.0	16.6	15.1	15.4	16.0	16.6		
	Hi PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	396	375	404	427	445	415	446	471	492	415	446	471	492		
Lo PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	138	151	161	135	143	156	167	135	143	156	167			
IDB: Entering Indoor Dry Bulb Temperature		Shaded area reflects AHRI conditions																												kW= Total system power	
High and low pressures are measured at the liquid and suction service valves.		Amps = outdoor unit amps (comp.+fan)																													

COOLING DATA — DZ14SA0481A* / ARUF48D14**

		OUTDOOR AMBIENT TEMPERATURE												105°F												115°F															
		65°F						75°F						85°F						95°F						105°F						115°F									
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	MBh	42.4	43.9	48.1	-	41.4	42.9	47.0	-	40.4	41.9	45.9	-	39.4	40.9	44.8	-	37.5	38.8	42.5	-	34.7	36.0	39.4	-	35.0	36.3	39.8	-	32.8	34.1	37.5	-	30.1	31.4	34.8	-				
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-				
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	18	15	12	-	17	15	11	-	16	14	10	-				
	kW	3.18	3.24	3.34	-	3.41	3.48	3.58	-	3.61	3.68	3.80	-	3.79	3.86	3.98	-	3.94	4.02	4.14	-	4.07	4.15	4.28	-	4.11	4.20	4.33	-	4.04	4.13	4.26	-	4.04	4.13	4.26	-				
	Amps	11.8	12.1	12.5	-	12.8	13.1	13.5	-	13.9	14.2	14.7	-	14.9	15.2	15.7	-	15.8	16.2	16.7	-	16.7	17.2	17.7	-	16.9	17.4	18.0	-	16.3	16.7	17.3	-	16.3	16.7	17.3	-				
	Hi PR	216	233	246	-	243	261	276	-	276	297	314	-	314	338	357	-	354	380	402	-	391	420	444	-	396	426	450	-	365	393	415	-	404	434	459	-				
	Lo PR	102	109	118	-	108	115	125	-	112	119	130	-	118	125	137	-	123	131	143	-	128	136	148	-	129	137	150	-	127	136	148	-	132	140	153	-				
1450	MBh	42.8	44.4	48.6	-	41.8	43.3	47.5	-	40.8	42.3	46.4	-	39.8	41.3	45.2	-	37.8	39.2	43.0	-	35.0	36.3	39.8	-	35.0	36.3	39.8	-	32.8	34.1	37.5	-	30.1	31.4	34.8	-				
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-	0.79	0.66	0.45	-	0.79	0.66	0.45	-				
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	10	-				
	kW	3.21	3.28	3.37	-	3.44	3.51	3.62	-	3.65	3.72	3.83	-	3.82	3.90	4.03	-	3.98	4.06	4.19	-	4.11	4.20	4.33	-	4.11	4.20	4.33	-	4.04	4.13	4.26	-	4.04	4.13	4.26	-				
	Amps	12.0	12.3	12.7	-	12.9	13.3	13.7	-	14.1	14.4	14.9	-	15.0	15.4	15.9	-	16.0	16.4	16.9	-	16.9	17.4	18.0	-	16.9	17.4	18.0	-	16.3	16.7	17.3	-	16.3	16.7	17.3	-				
	Hi PR	219	236	249	-	246	265	279	-	280	301	318	-	318	343	362	-	358	385	407	-	396	426	450	-	396	426	450	-	365	393	415	-	404	434	459	-				
	Lo PR	103	110	120	-	109	116	127	-	114	121	132	-	119	127	138	-	125	133	145	-	129	137	150	-	129	137	150	-	127	136	148	-	132	140	153	-				
1800	MBh	44.3	45.9	50.3	-	43.3	44.9	49.1	-	42.2	43.8	48.0	-	41.2	42.7	46.8	-	39.2	40.6	44.5	-	36.3	37.6	41.2	-	36.3	37.6	41.2	-	32.8	34.1	37.5	-	30.1	31.4	34.8	-				
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-				
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-	16	14	10	-	15	11	11	-	14	10	10	-				
	kW	3.26	3.32	3.42	-	3.49	3.57	3.67	-	3.70	3.78	3.89	-	3.88	3.97	4.09	-	4.04	4.13	4.26	-	4.17	4.26	4.40	-	4.17	4.26	4.40	-	4.04	4.13	4.26	-	4.04	4.13	4.26	-				
	Amps	12.2	12.5	12.9	-	13.2	13.5	13.9	-	14.3	14.7	15.2	-	15.3	15.7	16.2	-	16.3	16.7	17.3	-	17.3	17.7	18.3	-	17.3	17.7	18.3	-	16.3	16.7	17.3	-	16.3	16.7	17.3	-				
	Hi PR	223	240	254	-	251	270	285	-	285	307	324	-	325	349	369	-	365	393	415	-	404	434	459	-	404	434	459	-	365	393	415	-	404	434	459	-				
	Lo PR	105	112	122	-	111	119	129	-	116	123	134	-	122	129	141	-	127	136	148	-	132	140	153	-	132	140	153	-	127	136	148	-	132	140	153	-				
75	MBh	43.1	44.4	48.0	51.6	42.1	43.3	46.9	50.4	41.1	42.3	45.8	49.2	40.1	41.3	44.7	48.0	38.1	39.2	42.4	45.6	35.3	36.3	39.3	42.2	35.3	36.3	39.3	42.2	32.8	34.1	37.5	40.8	34.7	36.0	39.4	42.7	31.4	32.7	36.1	39.4
	S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.36	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39	0.90	0.81	0.61	0.39	0.79	0.66	0.45	0.24	0.79	0.66	0.46	0.24	0.79	0.66	0.46	
	ΔT	22	20	17	12	22	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11	22	20	17	12	21	19	16	11	21	19	16	11				
	kW	3.20	3.27	3.36	3.47	3.43	3.50	3.61	3.72	3.64	3.71	3.83	3.95	3.82	3.90	4.02	4.14	3.97	4.05	4.18	4.31	4.10	4.19	4.32	4.46	4.10	4.19	4.32	4.46	3.94	4.02	4.14	4.27	3.94	4.02	4.14	4.27				
	Amps	12.0	12.2	12.6	13.1	12.9	13.2	13.7	14.2	14.0	14.4	14.8	15.4	15.0	15.4	15.9	16.5	16.0	16.3	16.9	17.5	16.9	17.3	17.9	18.6	16.9	17.3	17.9	18.6	16.3	16.7	17.3	17.9	16.3	16.7	17.3	17.9				
	Hi PR	218	235	248	259	245	264	279	290	279	300	317	330	317	342	361	376	357	384	406	423	395	425	448	468	423	452	475	498	423	452	475	498	423	452	475	498				
	Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	133	145	154	129	137	150	159	129	137	150	159	125	133	145	154	129	137	150	159				
1450	MBh	43.5	44.8	48.5	52.1	42.5	43.8	47.4	50.9	41.5	42.7	46.3	49.7	40.5	41.7	45.1	48.4	38.5	39.6	42.9	46.0	35.6	36.7	39.7	42.6	35.6	36.7	39.7	42.6	32.8	34.1	37.5	40.8	34.7	36.0	39.4	42.7	31.4	32.7	36.1	39.4
	S/T	0.79	0.71	0.54	0.35	0.82	0.73	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	0.91	0.81	0.62	0.40	0.79	0.66	0.45	0.24	0.79	0.66	0.46	0.24	0.79	0.66	0.46	
	ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	12	21	19	16	11	22	20	17	12	21	19	16	11	21	19	16	11				
	kW	3.24	3.30	3.40	3.50	3.47	3.54	3.65	3.76	3.67	3.75	3.86	3.99	3.86	3.94	4.06	4.19	4.01	4.09	4.22	4.36	4.14	4.23	4.36	4.51	4.14	4.23	4.36	4.51	3.94	4.02	4.14	4.27	3.94	4.02	4.14	4.27				
	Amps	12.1	12.4	12.8	13.3	13.1	13.4	13.8	14.3	14.2	14.5	15.0	15.6	15.2	15.5	16.1	16.7	16.1	16.5	17.1	17.7	17.1	17.5	18.1	18.8	17.1	17.5	18.1	18.8	16.3	16.7	17.3	17.9	16.3	16.7	17.3	17.9				
	Hi PR	221	238	251	262	248	267	282	294	282	304	321	335	322	346	366	381	362	389	411	429	400	430	454	474	429	458	481	504	429	458	481	504	429	458	481	504				
	Lo PR	104	111	121	129	110	117	128	136	115	122	133	142	120	128	140	149	126	134	147	156	131	139	152	161	131	139	152	161	125	133	145	154	129	137	150	159				
1800	MBh	45.1	46.4	50.2	53.9	44.0	45.3	49.1	52.6	43.0	44.2	47.9	51.4	41.9	43.2	46.7	50.1	39.8	41.0	44.4	47.6	36.9																			

COOLING DATA — DZ14SA0481A* / ARUF48D14** (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
		65°F						75°F						85°F						95°F						105°F						115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
80	1400	MBh	43.9	44.8	47.9	51.2	42.8	43.8	46.8	50.0	41.8	42.7	45.7	48.8	40.8	41.7	44.6	47.6	38.8	39.6	42.3	45.2	35.9	36.7	39.2	41.9	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
		ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
		kW	3.23	3.29	3.39	3.49	3.46	3.53	3.64	3.75	3.67	3.74	3.86	3.98	3.85	3.93	4.05	4.18	4.00	4.08	4.21	4.35	4.13	4.22	4.35	4.49																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					

COOLING DATA — DZ14SA0601A* / CA*F4961*6D*+MBR2000** -1+TXV

		OUTDOOR AMBIENT TEMPERATURE																												
		65°F				75°F				85°F				95°F				105°F				115°F								
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1750	MBh	53.2	55.2	60.4	-	52.0	53.9	59.0	-	50.7	52.6	57.6	-	49.5	51.3	56.2	-	47.0	48.7	53.4	-	43.6	45.2	49.5	-	47.0	48.7	53.4	-
		S/T	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.77	0.64	0.44	-	0.76	0.63	0.44	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-	19	16	12	-
		kW	3.68	3.75	3.86	-	3.94	4.02	4.13	-	4.17	4.25	4.38	-	4.36	4.45	4.59	-	4.53	4.63	4.77	-	4.68	4.78	4.93	-	4.53	4.63	4.77	-
		Amps	13.2	13.5	13.9	-	14.2	14.6	15.1	-	15.5	15.9	16.4	-	16.5	17.0	17.5	-	17.6	18.1	18.7	-	18.7	19.1	19.8	-	17.6	18.1	18.7	-
	1800	Hi PR	222	239	253	-	250	269	284	-	284	305	323	-	323	348	367	-	364	391	413	-	402	432	457	-	364	391	413	-
		Lo PR	96	102	112	-	102	108	118	-	106	112	123	-	111	118	129	-	116	124	135	-	120	128	140	-	116	124	135	-
		MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-	47.5	49.2	53.9	-
		S/T	0.67	0.56	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.77	0.65	0.45	-	0.77	0.64	0.44	-
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	19	16	12	-
2250	kW	3.72	3.79	3.90	-	3.98	4.06	4.17	-	4.21	4.29	4.42	-	4.41	4.50	4.63	-	4.58	4.67	4.82	-	4.73	4.83	4.98	-	4.58	4.67	4.82	-	
	Amps	13.3	13.6	14.1	-	14.4	14.8	15.2	-	15.7	16.0	16.6	-	16.7	17.2	17.7	-	17.8	18.3	18.9	-	18.9	19.4	20.0	-	17.8	18.3	18.9	-	
	Hi PR	225	243	256	-	253	272	287	-	288	309	327	-	328	352	372	-	368	397	419	-	407	438	463	-	368	397	419	-	
	Lo PR	97	104	113	-	103	109	119	-	107	114	124	-	112	119	130	-	118	125	137	-	122	130	141	-	118	125	137	-	
	MBh	55.6	57.7	63.2	-	54.3	56.3	61.7	-	53.0	55.0	60.2	-	51.8	53.6	58.8	-	49.2	51.0	55.8	-	45.5	47.2	51.7	-	49.2	51.0	55.8	-	
75	1750	S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.82	0.69	0.48	-	0.81	0.68	0.47	-
		ΔT	16	14	11	-	16	14	11	-	16	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-	16	14	11	-
		kW	3.77	3.84	3.95	-	4.04	4.12	4.24	-	4.27	4.36	4.49	-	4.48	4.57	4.71	-	4.65	4.75	4.89	-	4.80	4.90	5.06	-	4.65	4.75	4.89	-
		Amps	13.6	13.9	14.3	-	14.7	15.0	15.5	-	15.9	16.3	16.9	-	17.1	17.5	18.1	-	18.2	18.6	19.2	-	19.3	19.7	20.4	-	18.2	18.6	19.2	-
		Hi PR	230	247	261	-	258	278	293	-	293	316	333	-	334	360	380	-	376	404	427	-	415	447	472	-	376	404	427	-
	1800	Lo PR	99	106	115	-	105	112	122	-	109	116	127	-	115	122	133	-	120	128	139	-	124	132	144	-	120	128	139	-
		MBh	54.1	55.7	60.3	64.7	52.9	54.4	58.9	63.2	51.6	53.1	57.5	61.7	50.3	51.8	56.1	60.2	47.8	49.2	53.3	57.2	44.3	45.6	49.4	53.0	47.8	49.2	53.3	57.2
		S/T	0.76	0.68	0.51	0.33	0.79	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.87	0.78	0.59	0.38	0.86	0.77	0.58	0.38
		ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	11	22	20	16	11
		kW	3.71	3.78	3.89	4.00	3.97	4.05	4.17	4.29	4.20	4.28	4.41	4.54	4.40	4.49	4.62	4.77	4.57	4.66	4.81	4.96	4.72	4.82	4.97	5.12	4.57	4.66	4.81	4.96
2250	Amps	13.3	13.6	14.0	14.6	14.4	14.7	15.2	15.8	15.6	16.0	16.5	17.2	16.7	17.1	17.7	18.4	17.8	18.2	18.8	19.6	18.9	19.3	20.0	20.7	17.8	18.2	18.8	19.6	
	Hi PR	225	242	255	266	252	271	286	299	287	309	326	340	327	351	371	387	371	367	395	418	435	406	437	461	481	367	395	418	435
	Lo PR	97	103	113	120	103	109	119	127	107	113	124	132	112	119	130	139	117	125	136	145	121	129	141	150	117	125	136	145	
	MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8	44.7	46.1	49.9	53.5	48.3	49.7	53.8	57.8	
	S/T	0.77	0.68	0.52	0.33	0.79	0.71	0.54	0.35	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.88	0.79	0.59	0.38	0.87	0.78	0.59	0.38	
2250	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	18	15	10	22	20	16	11	
	kW	3.75	3.82	3.93	4.04	4.01	4.09	4.21	4.33	4.24	4.32	4.45	4.59	4.44	4.53	4.67	4.82	4.62	4.71	4.86	5.01	4.77	4.87	5.02	5.18	4.62	4.71	4.86	5.01	
	Amps	13.4	13.8	14.2	14.8	14.5	14.9	15.4	16.0	15.8	16.2	16.7	17.4	16.9	17.3	17.9	18.6	18.0	18.4	19.1	19.8	19.1	19.6	20.2	21.0	18.0	18.4	19.1	19.8	
	Hi PR	228	245	259	270	255	275	290	303	291	313	330	344	331	356	376	392	372	401	423	441	411	443	467	487	372	401	423	441	
	Lo PR	98	105	114	122	104	111	121	129	108	115	125	134	113	121	132	140	119	126	138	147	123	131	143	152	119	126	138	147	
2250	MBh	56.6	58.3	63.1	67.7	55.3	56.9	61.6	66.1	53.9	55.5	60.1	64.5	52.6	54.2	58.7	63.0	50.0	51.5	55.7	59.8	46.3	47.7	51.6	55.4	50.0	51.5	55.7	59.8	
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.59	0.38	0.89	0.80	0.60	0.39	0.93	0.83	0.63	0.40	0.93	0.84	0.63	0.41	0.93	0.83	0.63	0.40	
	ΔT	19	17	14	10	19	18	14	10	19	18	14	10	19	18	14	10	19	17	14	10	18	16	13	9	19	17	14	10	
	kW	3.80	3.87	3.98	4.10	4.07	4.15	4.27	4.40	4.30	4.39	4.52	4.66	4.51	4.60	4.74	4.89	4.69	4.79	4.93	5.09	4.84	4.94	5.10	5.26	4.69	4.79	4.93	5.09	
	Amps	13.7	14.0	14.5	15.0	14.8	15.2	15.7	16.3	16.1	16.5	17.0	17.7	17.2	17.6	18.2	18.9	18.3	18.8	19.4	20.2	19.4	19.9	20.6	21.4	18.3	18.8	19.4	20.2	
2250	Hi PR	232	250	264	275	261	280	296	309	296	319	337	351	337	363	384	400	380	409	431	450	420	451	477	497	380	409	431	450	
	Lo PR	100	107	117	124	106	113	123	131	110	117	128	136	116	123	134	143	121	129	141	150	125	133	146	155	121	129	141	150	
	Shaded area reflects ACCA (TVA) conditions																													
	kW= Total system power																													
	Amps = outdoor unit amps (comp.+fan)																													

COOLING DATA — DZ14SA0601A* / CA*F4961*6D*+MBR2000** -1+TXV

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1750	MBh	55.1	56.3	60.1	64.3	53.8	55.0	58.7	62.8	52.5	53.7	57.3	61.3	51.2	52.4	55.9	59.8	48.7	49.7	53.1	56.8	45.1	46.1	49.2	52.6	45.1	46.1	49.2	52.6							
		S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54	0.95	0.89	0.73	0.54							
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	20	16	24	23	20	16	23	22	19	15	23	22	19	15							
		kW	3.74	3.81	3.92	4.03	4.00	4.08	4.20	4.32	4.23	4.31	4.44	4.58	4.43	4.52	4.66	4.81	4.61	4.70	4.85	5.00	4.75	4.85	5.00	5.16	4.75	4.85	5.00	5.16							
		Amps	13.4	13.7	14.2	14.7	14.5	14.8	15.3	15.9	15.8	16.1	16.7	17.3	16.9	17.3	17.9	18.5	18.0	18.4	19.0	19.8	19.0	19.5	20.2	20.9	19.0	19.5	20.2	20.9							
	1800	Hi PR	227	244	258	269	255	274	289	302	290	312	329	343	330	355	375	391	371	399	422	440	410	441	466	486	410	441	466	486							
		Lo PR	98	104	114	121	104	110	120	128	108	115	125	133	113	120	131	140	119	126	138	147	123	130	142	152	123	130	142	152							
		MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2	45.5	46.5	49.7	53.2							
		S/T	0.84	0.79	0.64	0.48	0.87	0.82	0.66	0.50	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.53	0.96	0.90	0.73	0.55	0.96	0.90	0.74	0.55	0.96	0.90	0.74	0.55							
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15	22	21	19	15							
2250	kW	3.77	3.85	3.96	4.07	4.04	4.12	4.24	4.37	4.27	4.36	4.49	4.63	4.48	4.57	4.71	4.86	4.65	4.75	4.90	5.05	4.80	4.90	5.06	5.22	4.80	4.90	5.06	5.22								
	Amps	13.6	13.9	14.3	14.9	14.7	15.0	15.5	16.1	16.0	16.3	16.9	17.5	17.1	17.5	18.1	18.8	18.2	18.6	19.3	20.0	19.3	19.7	20.4	21.2	19.3	19.7	20.4	21.2								
	Hi PR	230	247	261	273	258	278	293	306	293	316	333	348	334	360	380	396	376	405	427	446	415	447	472	492	415	447	472	492								
	Lo PR	99	106	115	123	105	112	122	130	109	116	127	135	115	122	133	142	120	128	139	149	124	132	144	154	124	132	144	154								
	MBh	57.6	58.8	62.9	67.2	56.2	57.5	61.4	65.6	54.9	56.1	59.9	64.1	53.6	54.7	58.5	62.5	50.9	52.0	55.6	59.4	47.1	48.2	51.5	55.0	47.1	48.2	51.5	55.0								
85	1750	S/T	0.89	0.84	0.68	0.51	0.92	0.87	0.71	0.53	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58							
		ΔT	21	20	17	14	21	20	18	14	21	20	18	14	22	21	18	14	21	20	18	14	19	19	16	13	19	19	16	13							
		kW	3.83	3.90	4.01	4.13	4.10	4.18	4.30	4.43	4.34	4.42	4.56	4.70	4.55	4.64	4.78	4.93	4.72	4.82	4.97	5.13	4.88	4.98	5.14	5.30	4.88	4.98	5.14	5.30							
		Amps	13.8	14.1	14.6	15.2	14.9	15.3	15.8	16.4	16.2	16.6	17.2	17.9	17.4	17.8	18.4	19.1	18.5	19.0	19.6	20.4	19.6	20.1	20.8	21.6	19.6	20.1	20.8	21.6							
		Hi PR	235	252	267	278	263	283	299	312	299	322	340	355	341	367	387	404	384	413	436	455	424	456	482	502	424	456	482	502							
1800	Lo PR	101	108	118	125	107	114	124	132	111	118	129	138	117	124	136	145	123	130	142	152	127	135	147	157	127	135	147	157								
	MBh	56.0	57.1	59.8	63.8	54.7	55.8	58.4	62.3	53.4	54.5	57.0	60.9	52.1	53.1	55.7	59.4	49.5	50.5	52.9	56.4	45.9	46.8	49.0	52.3	45.9	46.8	49.0	52.3								
	S/T	0.87	0.84	0.76	0.62	0.90	0.87	0.79	0.64	0.93	0.89	0.81	0.65	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.97	0.87	0.71	1.00	0.97	0.87	0.71								
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	26	25	24	21	24	24	22	19	24	24	22	19								
	kW	3.76	3.84	3.95	4.06	4.03	4.11	4.23	4.36	4.26	4.35	4.48	4.61	4.47	4.56	4.70	4.84	4.64	4.74	4.88	5.04	4.79	4.89	5.04	5.20	4.79	4.89	5.04	5.20								
2250	Amps	13.5	13.8	14.3	14.8	14.6	15.0	15.5	16.1	15.9	16.3	16.8	17.5	17.0	17.4	18.0	18.7	18.1	18.6	19.2	19.9	19.2	19.7	20.4	21.1	19.2	19.7	20.4	21.1								
	Hi PR	229	247	260	272	257	277	292	305	293	315	332	347	333	359	379	395	375	403	426	444	414	446	471	491	414	446	471	491								
	Lo PR	99	105	115	123	105	111	122	129	109	116	126	135	114	122	133	141	120	127	139	148	124	132	144	153	124	132	144	153								
	MBh	56.6	57.7	60.4	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.3	47.2	49.5	52.8	46.3	47.2	49.5	52.8								
	S/T	0.88	0.85	0.77	0.62	0.91	0.88	0.79	0.64	0.94	0.90	0.81	0.66	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.98	0.88	0.71	1.00	0.98	0.88	0.71								
85	1800	ΔT	25	25	24	20	26	25	24	21	26	25	24	21	26	26	24	21	26	25	24	21	24	24	22	19	24	24	22	19							
		kW	3.80	3.87	3.99	4.10	4.07	4.15	4.27	4.40	4.30	4.39	4.52	4.66	4.51	4.60	4.75	4.89	4.69	4.79	4.93	5.09	4.84	4.94	5.10	5.26	4.84	4.94	5.10	5.26							
		Amps	13.7	14.0	14.5	15.0	14.8	15.2	15.7	16.3	16.1	16.5	17.1	17.7	17.2	17.6	18.2	18.9	18.3	18.8	19.4	20.2	19.4	19.9	20.6	21.4	19.4	19.9	20.6	21.4							
		Hi PR	232	250	264	275	261	280	296	309	296	319	337	351	338	363	384	400	380	409	432	450	420	452	477	497	420	452	477	497							
		Lo PR	100	107	117	124	106	113	123	131	110	117	128	136	116	123	134	143	121	129	141	150	125	133	146	155	125	133	146	155							
2250	MBh	58.6	59.7	62.5	66.7	57.2	58.3	61.1	65.2	55.9	56.9	59.6	63.6	54.5	55.6	58.2	62.1	51.8	52.8	55.3	59.0	48.0	48.9	51.2	54.6	48.0	48.9	51.2	54.6								
	S/T	0.94	0.90	0.81	0.66	0.97	0.94	0.84	0.68	0.99	0.96	0.87	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.76								
	ΔT	22	22	21	18	23	22	21	18	23	22	21	18	22	22	21	18	21	22	21	18	20	20	20	17	20	20	20	17								
	kW	3.85	3.93	4.04	4.16	4.13	4.21	4.34	4.47	4.37	4.46	4.59	4.73	4.58	4.68	4.82	4.97	4.76	4.86	5.01	5.17	4.92	5.02	5.18	5.34	4.92	5.02	5.18	5.34								
	Amps	13.9	14.3	14.7	15.3	15.1	15.4	16.0	16.6	16.4	16.8	17.4	18.0	17.5	18.0	18.6	19.3	18.7	19.1	19.8	20.6	19.8	20.3	21.0	21.8	19.8	20.3	21.0	21.8								
85	2250	Hi PR	237	255	269	281	266	286	302	315	302	325	344	358	344	371	391	408	387	417	440	459	428	461	486	507	428	461	486	507							
		Lo PR	102	109	119	127	108	115	126	134	112	120	131	139	118	126	137	146	124	132	144	153	128	136	149	158	128	136	149	158							

HEATING DATA

DZ14SA0181A* / ARPT18B14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	22.8	21.6	20.4	19.0	18.2	17.6	16.4	15.1	12.6	11.6	10.7	10.1	9.8	8.7	7.8	6.8	5.8	4.7
ΔT	36.5	34.5	32.5	30.4	29.0	28.1	26.1	24.1	20.1	18.6	17.1	16.2	15.6	14.0	12.4	10.8	9.2	7.5
kW	1.45	1.43	1.40	1.37	1.4	1.34	1.32	1.29	1.23	1.20	1.18	1.16	1.15	1.12	1.10	1.07	1.05	1.02
Amps	7.9	7.3	6.8	6.4	6.2	6.1	5.7	5.4	5.2	5.0	4.7	4.6	4.6	4.3	4.0	3.8	3.5	3.2
COP	4.11	3.96	3.79	3.61	3.48	3.40	3.21	3.02	2.63	2.48	2.32	2.22	2.15	1.97	1.78	1.59	1.38	1.16
HI PR	404	388	373	356	348	341	328	315	302	288	277	270	265	255	245	235	227	219
LO PR	151	140	131	121	114	110	101	90	81	72	64	59	57	48	42	35	31	24

DZ14SA0241A* / ARPT24B14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.2	28.6	26.9	25.2	24.1	23.3	21.6	20.0	17.4	16.1	14.8	14.0	13.4	12.1	10.7	9.3	8.0	6.5
ΔT	32.9	31.2	29.3	27.4	26.2	25.4	23.6	21.7	19.0	17.5	16.1	15.2	14.6	13.1	11.7	10.2	8.7	7.1
kW	1.94	1.91	1.87	1.84	1.8	1.80	1.77	1.73	1.62	1.59	1.55	1.53	1.52	1.49	1.46	1.42	1.39	1.36
Amps	10.5	9.8	9.2	8.6	8.3	8.2	7.7	7.3	7.0	6.7	6.4	6.2	6.2	5.9	5.5	5.2	4.8	4.3
COP	4.02	3.87	3.70	3.52	3.39	3.31	3.12	2.93	2.71	2.54	2.38	2.28	2.21	2.02	1.82	1.62	1.41	1.18
HI PR	404	388	373	356	348	341	328	315	302	288	277	270	265	255	245	235	227	219
LO PR	145	134	126	115	109	105	96	86	77	69	61	57	55	46	40	34	29	23

DZ14SA0301A* / ARPT30B14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	34.7	32.9	30.9	28.9	27.6	26.8	24.9	22.9	20.4	18.9	17.4	16.4	15.8	14.2	12.6	11.0	9.3	7.7
ΔT	38.3	36.2	34.1	31.9	30.5	29.5	27.4	25.3	22.5	20.8	19.1	18.1	17.4	15.6	13.8	12.1	10.3	8.4
kW	2.23	2.19	2.15	2.11	2.1	2.07	2.03	1.99	1.90	1.86	1.82	1.80	1.79	1.75	1.71	1.67	1.63	1.59
Amps	12.1	11.2	10.5	9.9	9.5	9.4	8.8	8.4	8.1	7.7	7.3	7.2	7.1	6.7	6.3	5.9	5.5	5.0
COP	4.08	3.93	3.76	3.58	3.45	3.37	3.18	2.99	2.77	2.60	2.44	2.33	2.26	2.07	1.87	1.66	1.45	1.21
HI PR	412	395	380	363	355	348	334	321	308	294	282	275	270	260	250	240	231	223
LO PR	143	133	124	114	108	104	95	85	77	68	60	56	54	46	39	33	29	23

DZ14SA0361A* / ARPT36D14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	42.6	40.3	38.0	35.5	33.9	32.9	30.5	28.1	25.8	23.8	21.9	20.7	20.0	17.9	15.9	13.8	11.8	9.7
ΔT	35.2	33.4	31.4	29.3	28.0	27.2	25.2	23.3	21.3	19.7	18.1	17.1	16.5	14.8	13.1	11.4	9.8	8.0
kW	2.50	2.46	2.41	2.37	2.3	2.33	2.29	2.24	2.19	2.14	2.10	2.08	2.06	2.02	1.98	1.94	1.89	1.85
Amps	13.5	12.6	11.8	11.1	10.7	10.5	10.0	9.5	9.1	8.7	8.3	8.1	8.0	7.7	7.2	6.8	6.3	5.7
COP	4.36	4.19	4.01	3.80	3.67	3.58	3.37	3.16	2.97	2.78	2.61	2.49	2.41	2.20	1.99	1.76	1.53	1.28
HI PR	388	372	357	342	334	327	315	302	289	276	265	259	254	245	235	226	218	210
LO PR	143	132	124	114	107	103	95	85	76	68	60	56	54	45	39	33	29	23

High pressure is measured at the liquid service valve .

kW = Total system power

Amps = Outdoor unit amps (comp.+fan)

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

HEATING DATA (CONT.)

DZ14SA0381A* / ASPT42C14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	42.7	40.5	38.1	35.6	34.0	32.9	30.6	28.2	25.7	23.7	21.8	20.6	19.8	17.8	15.8	13.8	11.7	9.6
ΔT	33.7	31.9	30.0	28.1	26.8	26.0	24.1	22.2	20.2	18.7	17.2	16.2	15.6	14.0	12.4	10.8	9.3	7.6
kW	2.46	2.40	2.35	2.29	2.3	2.23	2.17	2.11	2.10	2.04	1.98	1.94	1.92	1.86	1.80	1.74	1.68	1.62
Amps	13.4	12.3	11.5	10.7	10.3	10.1	9.5	8.9	8.5	8.1	7.7	7.4	7.3	6.9	6.4	5.9	5.4	4.8
COP	4.57	4.42	4.26	4.07	3.94	3.86	3.66	3.46	3.17	3.00	2.84	2.72	2.65	2.44	2.23	2.00	1.76	1.48
HI PR	400	383	368	352	344	337	324	311	298	285	273	267	262	252	243	233	224	216
LO PR	149	138	129	119	112	108	99	88	80	71	63	58	56	47	41	35	30	24

DZ14SA0421A* / ARPT42D14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	51.7	49.0	46.1	43.1	41.2	39.9	37.0	34.2	30.8	28.4	26.2	24.7	23.8	21.3	18.9	16.5	14.1	11.5
ΔT	36.0	34.1	32.1	30.0	28.7	27.8	25.8	23.8	21.4	19.8	18.2	17.2	16.6	14.9	13.2	11.5	9.8	8.0
kW	3.11	3.05	3.00	2.94	2.9	2.88	2.83	2.77	2.57	2.52	2.47	2.43	2.41	2.36	2.31	2.26	2.20	2.15
Amps	16.9	15.7	14.7	13.8	13.3	13.1	12.3	11.7	11.2	10.7	10.2	9.9	9.8	9.3	8.7	8.2	7.6	6.8
COP	4.27	4.11	3.93	3.74	3.60	3.52	3.32	3.12	3.00	2.82	2.64	2.52	2.44	2.23	2.02	1.79	1.56	1.30
HI PR	422	404	389	372	363	356	342	329	315	301	289	282	277	266	256	245	237	228
LO PR	141	130	122	112	106	102	94	84	75	67	59	55	53	45	39	33	29	22

DZ14SA0481A* / ARUF48D14A*

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	59.3	56.2	52.9	49.4	47.2	45.7	42.5	39.2	36.2	33.5	30.8	29.1	28.0	25.1	22.3	19.4	16.6	13.6
ΔT	37.9	35.9	33.8	31.6	30.1	29.2	27.1	25.0	23.1	21.4	19.7	18.6	17.9	16.1	14.2	12.4	10.6	8.7
kW	3.47	3.41	3.35	3.28	3.2	3.22	3.16	3.10	2.83	2.78	2.72	2.69	2.67	2.61	2.55	2.50	2.44	2.38
Amps	18.9	17.5	16.4	15.4	14.9	14.6	13.7	13.0	12.5	11.9	11.3	11.1	10.9	10.4	9.7	9.1	8.4	7.6
COP	4.32	4.16	3.98	3.78	3.64	3.56	3.36	3.15	3.14	2.95	2.76	2.63	2.55	2.33	2.11	1.87	1.63	1.36
HI PR	424	406	391	374	365	358	344	330	316	302	290	283	278	267	257	247	238	229
LO PR	136	126	118	108	102	98	91	81	73	65	57	53	51	43	37	32	28	22

DZ14SA0601A* / CA*F4961*6D*+MBR2000-1+TXV**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	75.5	71.5	67.3	62.9	60.1	58.2	54.1	49.9	46.3	42.8	39.4	37.2	35.8	32.1	28.5	24.8	21.2	17.4
ΔT	38.9	36.8	34.6	32.4	30.9	30.0	27.8	25.7	23.8	22.0	20.3	19.1	18.4	16.5	14.7	12.8	10.9	8.9
kW	4.55	4.47	4.39	4.30	4.3	4.22	4.14	4.06	3.63	3.55	3.48	3.44	3.41	3.33	3.26	3.19	3.12	3.04
Amps	24.9	23.0	21.5	20.2	19.5	19.1	18.0	17.0	16.3	15.5	14.8	14.4	14.2	13.4	12.5	11.7	10.8	9.7
COP	4.17	4.01	3.83	3.64	3.51	3.43	3.24	3.04	3.10	2.91	2.72	2.60	2.52	2.30	2.08	1.84	1.60	1.34
HI PR	432	415	399	381	372	365	351	337	323	308	296	289	284	273	262	252	243	234
LO PR	130	121	113	104	98	94	87	77	70	62	55	51	49	41	36	30	26	21

High pressure is measured at the liquid service valve .

kW = Total system power

Amps = Outdoor unit amps (comp.+fan)

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)						TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	SEER ¹	HI	HSPF ⁴	LOW				
DZ14SA 0181A*	ACNF18XX16D*+TXV		17,000	12,700	13.50	11.50	11,800	9,200	13.50	17,000	7.70	10,000	580	6546228		
	ARPT18B14A*		18,000	13,500	14.00	12.00	12,500	9,800	14.00	17,900	7.70	10,000	580	6546229		
	ARPT24B14A*		18,000	13,500	14.00	12.00	12,500	9,800	14.00	17,900	7.70	10,000	560	6546230		
	ARPT30B14A*		18,000	13,500	14.00	12.00	12,500	9,800	14.00	17,000	7.80	10,000	585	6546231		
	ARUF18B14A*+TXV		17,000	12,700	13.00	11.00	11,800	9,200	13.00	17,000	7.70	10,000	605	6546232		
	ARUF24B14C*+TXV		17,000	12,700	13.50	11.00	11,800	9,200	13.50	17,000	7.70	10,000	600	7084892		
	ARUF30B14A*		18,000	13,500	13.30	11.00	12,500	9,800	13.30	17,000	7.70	10,000	585	6546234		
	ARUF30B14A*+TXV		18,000	13,500	14.00	12.00	12,500	9,800	14.00	17,000	7.80	10,000	585	6546235		
	ASPT24B14A*		18,000	13,500	14.50	12.00	12,500	9,800	14.50	17,000	8.20	9,300	605	6546237		
	ASPT30C14A*		18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,000	8.00	9,500	580	6546238		
	ASUF29B14A*		18,000	13,500	14.00	11.50	12,500	9,800	14.00	17,000	8.00	8,800	605	6546239		
	ASUF29B14A*+TXV		18,000	13,500	14.50	12.00	12,500	9,800	14.50	17,000	8.20	9,300	605	6546240		
	AVPTC24B14A*		18,000	13,500	14.50	12.00	12,500	9,800	14.50	17,000	8.20	9,300	600	6546242		
	AWUF31XX16A*		18,000	13,500	14.50	12.50	12,500	9,800	14.50	17,600	8.20	9,000	600	6546244		
	AWUF31XX16A*+TXV		18,000	13,500	15.00	12.70	12,500	9,800	15.00	17,600	8.20	9,000	600	6546245		
	CA*F3131*6D*+EEP+TXV		18,400	13,800	14.00	12.00	12,800	10,000	14.00	18,000	8.00	10,400	600	6546246		
	CA*F3131*6D*+MBR0800**-1+TXV		18,000	13,500	14.00	12.00	12,500	9,800	14.00	18,000	8.10	10,200	600	6546247		
	CA*F3131*6D*+MBVC1200**-1A*+TXV		18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,900	8.10	10,000	550	6546248		
	CA*F3131*6D*+TXV	G*VC950453BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,100	650	6546249		
	CA*F3131*6D*+TXV	G*VM960603BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,100	650	6546250		
	CA*F3131*6D*+TXV	D*96VC0453BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,100	650	6547448		
	CA*F3131*6D*+TXV	D*96MC0603BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,100	650	6592122		
	CAPT3131*4A*	G*VC950453BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,800	8.10	10,100	590	6546251		
	CAPT3131*4A*	G*VM960603BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,700	8.10	10,100	570	6546252		
	CAPT3131*4A*	D*96VC0453BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,800	8.10	10,100	590	6547450		
	CAPT3131*4A*	D*96MC0603BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,700	8.10	10,100	570	6592123		
	CAPT3131*4A*+EEP		18,400	13,800	13.50	12.00	12,800	10,000	13.50	18,000	7.70	10,400	580	6546253		
	CAPT3131*4A*+MBR0800**-1		18,000	13,500	14.00	12.00	12,500	9,800	14.00	18,000	8.00	10,800	580	6546254		
	CAPT3131*4A*+MBVC1200**-1A*		18,000	13,500	15.00	12.50	12,500	9,800	15.00	17,600	8.10	10,000	585	6546255		
	CHPF2430B6C*+EEP+TXV		19,000	14,200	14.00	12.00	13,200	10,300	14.00	18,000	8.50	10,400	600	6546256		
	CHPF2430B6C*+MBR0800**-1+TXV		18,000	13,500	14.00	12.00	12,500	9,800	14.00	18,000	8.10	10,200	600	6546257		
	CHPF2430B6C*+MBVC1200**-1A*+TXV		18,400	13,800	14.00	12.00	12,800	10,000	14.00	18,000	8.50	10,800	600	6546258		
	CHPF2430B6C*+TXV	G*E80603B*B*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	16,800	8.10	10,200	670	6546259		
	CHPF2430B6C*+TXV	G*VC950453BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,200	600	6546260		
	CHPF2430B6C*+TXV	G*VM960603BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,200	600	6546261		
	CHPF2430B6C*+TXV	D*80HE0603B*A*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	16,800	8.10	10,200	670	6547452		
	CHPF2430B6C*+TXV	D*96VC0453BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,200	600	6547453		
	CHPF2430B6C*+TXV	D*96MC0603BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,200	600	6592124		
	CHPF3636B6C*+MBVC1200**-1A*+TXV		19,000	14,200	15.00	13.00	13,200	10,300	15.00	18,000	8.50	10,400	600	6546262		
	CSCF3036N6D*+TXV	G*VC950453BXB*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,200	650	6546263		
	CSCF3036N6D*+TXV	D*96VC0453BXA*	18,000	13,500	15.00	12.50	12,500	9,800	15.00	18,000	8.10	10,200	650	6547455		
	DV24PTCB14A*		18,000	13,500	14.50	12.00	12,500	9,800	14.50	17,000	8.20	9,300	600	6546243		

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		FURNACES	COOLING CAPACITY (BTU/H)				TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS			TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.		HI	HSPF ⁴	LOW		
DZ14SA 0241A*	ACNF24XX16D*+TXV			23,000	17,300	13.50	11.50	16,000	12,800		24,600	7.70	14,000	835	6546264
	ARPT24B14A*			24,000	18,100	13.50	11.50	16,700	13,400		24,000	8.00	14,000	820	6546265
	ARPT30B14A*			24,000	18,100	14.00	12.00	16,700	13,400		23,600	8.00	14,200	850	6546266
	ARUF24B14C*+TXV			23,200	17,500	13.50	11.50	16,200	12,900		23,600	7.80	14,100	800	7084894
	ARUF30B14A*+TXV			24,000	18,100	14.00	12.00	16,700	13,400		23,600	8.00	14,200	850	6546268
	ASPT24B14A*			22,600	17,000	14.00	11.50	15,800	12,600		22,000	8.00	13,000	810	6546271
	ASPT30C14A*			23,600	17,800	15.00	12.50	16,500	13,200		22,000	8.50	13,000	845	6546272
	ASUF29B14A*			22,600	17,000	13.50	11.00	15,800	12,600		22,000	8.00	13,600	810	6546273
	ASUF29B14A*+TXV			22,600	17,000	14.00	11.50	15,800	12,600		22,000	8.00	13,000	810	6546274
	ASUF39C14A*			23,600	17,800	14.50	12.00	16,500	13,200		22,000	8.20	12,700	885	6546275
	ASUF39C14A*+TXV			23,600	17,800	15.00	12.50	16,500	13,200		22,000	8.50	12,700	885	6546276
	AVPTC24B14A*			22,600	17,000	14.00	11.50	15,800	12,600		22,000	8.00	13,000	800	6546278
	AVPTC30C14A*			23,600	17,800	15.00	12.50	16,500	13,200		22,000	8.50	13,000	860	6546280
	AWUF31XX16A*			24,000	18,100	14.50	12.50	16,700	13,400		23,000	8.50	13,400	840	6546283
	AWUF31XX16A*+TXV			24,000	18,100	15.00	12.70	16,700	13,400		23,000	8.50	13,400	840	6546284
	AWUF32XX16A*			24,000	18,100	14.50	12.50	16,700	13,400		23,000	8.50	13,400	840	6546285
	AWUF32XX16A*+TXV			24,000	18,100	15.00	12.70	16,700	13,400		23,000	8.50	13,400	840	6546286
	CA*F3636*6D*+EEP+TXV			24,000	18,100	14.00	12.00	16,700	13,400		24,000	8.00	14,000	800	6546287
	CA*F3636*6D*+MBR0800**+1+TXV			24,000	18,100	14.00	12.00	16,700	13,400		24,000	8.20	14,500	850	6546288
	CA*F3636*6D*+MBVC1200**+1A*+TXV			24,000	18,100	15.00	12.50	16,700	13,400		24,000	8.50	14,500	800	6546289
	CA*F3636*6D*+MBVC1600**+1A*+TXV			24,000	18,100	15.00	13.00	16,700	13,400		22,000	8.50	12,000	850	6546290
	CA*F3636*6D*+TXV		G*E80603B*B*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.30	14,500	860	6546291
	CA*F3636*6D**+TXV		G*VC9504538XB*	23,600	17,800	14.50	12.20	16,500	13,200		23,600	8.30	14,500	800	6546292
	CA*F3636*6D**+TXV		G*VC950704CXB*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.30	14,500	800	6546293
	CA*F3636*6D**+TXV		G*VC950714CXB*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.20	14,500	800	6546294
	CA*F3636*6D**+TXV		G*VM9606038XB*	23,600	17,800	14.50	12.20	16,500	13,200		23,600	8.30	14,500	800	6546295
	CA*F3636*6D**+TXV		G*VM960604CXB*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.20	14,500	800	6546296
	CA*F3636*6D**+TXV		D*80HE0603B*A*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.30	14,500	860	6547456
	CA*F3636*6D**+TXV		D*96VC0453BXA*	23,600	17,800	14.50	12.20	16,500	13,200		23,600	8.30	14,500	800	6547457
	CA*F3636*6D**+TXV		D*96VC0704CXA*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.30	14,500	800	6547458
	CA*F3636*6D**+TXV		D*96VC0714CXA*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.20	14,500	800	6547459
	CA*F3636*6D**+TXV		D*96MC06038XA*	23,600	17,800	14.50	12.20	16,500	13,200		23,600	8.30	14,500	800	6592125
	CA*F3636*6D**+TXV		D*96MC0604CXA*	23,600	17,800	15.00	12.50	16,500	13,200		23,000	8.20	14,500	800	6592126
	CAPT3131*4A*+EEP			23,000	17,300	13.50	11.50	16,000	12,800		21,600	7.70	14,200	800	6546297
	CAPT3131*4A*+MBVC1200**+1A*			23,600	17,800	14.50	12.00	16,500	13,200		21,000	8.00	13,600	850	6546298
	CHPF3636B6C*+EEP+TXV			24,000	18,100	14.00	12.00	16,700	13,400		24,000	8.20	12,000	800	6546299
	CHPF3636B6C*+MBR0800**+1+TXV			24,000	18,100	14.00	12.00	16,700	13,400		24,000	8.20	14,500	850	6546300
	CHPF3636B6C*+MBVC1200**+1A*+TXV			24,000	18,100	15.00	12.50	16,700	13,400		24,000	8.50	14,500	850	6546301

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³				HEATING CAPACITY (BTU/H)				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.			HI	HSPF ⁴	LOW			
DZ14SA 0241A*	CHPF3636B6C**+TXV	G*E80603B*B*	24,000	18,100	15.00	12.50	16,700	13,400			24,000	8.30	14,500		860	6546302
	CHPF3636B6C**+TXV	G*VC950453BxB*	24,000	18,100	14.50	12.20	16,700	13,400			24,000	8.30	14,500		800	6546303
	CHPF3636B6C**+TXV	G*VM960603BxB*	24,000	18,100	14.50	12.20	16,700	13,400			24,000	8.30	14,500		800	6546304
	CHPF3636B6C**+TXV	D*80HE0603B*A*	24,000	18,100	15.00	12.50	16,700	13,400			24,000	8.30	14,500		860	6547462
	CHPF3636B6C**+TXV	D*96VC0453BxA*	24,000	18,100	14.50	12.20	16,700	13,400			24,000	8.30	14,500		800	6547463
	CHPF3636B6C**+TXV	D*96MC0603BxA*	24,000	18,100	14.50	12.20	16,700	13,400			24,000	8.30	14,500		800	6592127
	CHPF3642C6C**+MBVC1600**_1A**+TXV		24,000	18,100	15.00	12.50	16,700	13,400			22,000	8.50	12,000		850	6546305
	CHPF3743C6B**+TXV	G*VC950704CXB*	23,600	17,800	14.50	12.20	16,500	13,200			23,600	8.30	14,500		800	6546306
	CHPF3743C6B**+TXV	D*96VC0704CXA*	23,600	17,800	14.50	12.20	16,500	13,200			23,600	8.30	14,500		800	6547465
	DV24PTC814A*		22,600	17,000	14.00	11.50	15,800	12,600			22,000	8.00	13,000		800	6546279
	DV30PTCC14A*		23,600	17,800	15.00	12.50	16,500	13,200			22,000	8.50	13,000		860	6546281
DZ14SA 0301A*	ACNF30XX16D**+TXV		27,200	19,700	13.50	11.50	18,200	15,300			27,200	7.70	16,000		860	6546307
	ARPT30B14A*		28,000	20,200	14.00	11.50	18,800	15,800			27,400	8.00	16,200		840	6546308
	ARPT36C14A*		28,000	20,200	14.00	11.50	18,800	15,800			27,400	8.00	16,200		810	6546309
	ARUF30B14A*		27,800	20,000	13.00	11.50	18,600	15,700			27,400	7.80	16,200		835	6546310
	ARUF30B14A**+TXV		28,000	20,200	14.00	12.00	18,800	15,800			27,400	8.00	16,300		835	6546311
	ASPT36C14A*		28,000	20,200	15.00	12.50	18,800	15,800			27,000	8.50	15,600		905	6546313
	ASUF39C14A*		28,000	20,200	14.50	12.00	18,800	15,800			27,000	8.20	15,600		905	6546314
	ASUF39C14A**+TXV		28,000	20,200	15.00	12.50	18,800	15,800			27,000	8.50	15,600		905	6546315
	AVPTC36C14A*		28,000	20,200	15.00	12.50	18,800	15,800			27,000	8.50	15,600		930	6546317
	AWUF31XX16A*		28,800	20,800	14.00	12.00	19,300	16,200			28,000	8.50	18,000		1,020	6546319
	AWUF31XX16A**+TXV		28,800	20,800	14.50	12.30	19,300	16,200			28,000	8.50	18,000		1,020	6546320
	AWUF32XX16A*		28,800	20,800	14.00	12.00	19,300	16,200			28,000	8.50	18,000		1,020	6546321
	AWUF32XX16A**+TXV		28,800	20,800	14.50	12.30	19,300	16,200			28,000	8.50	18,000		1,020	6546322
	CA*F3636*6D**+EEP+TXV		28,800	20,800	14.00	12.00	19,300	16,200			28,000	8.30	18,000		1,000	6546323
	CA*F3636*6D**+MBVC1200**_1A**+TXV		28,800	20,800	15.00	13.00	19,300	16,200			28,000	8.50	18,000		950	6546324
	CA*F3636*6D**+TXV	G*VC80604B*B*	28,800	20,800	15.00	12.50	19,300	16,200			28,000	8.50	16,600		1,000	6546325
	CA*F3636*6D**+TXV	G*VC950453BxB*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6546326
	CA*F3636*6D**+TXV	G*VC950704CXB*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6546327
	CA*F3636*6D**+TXV	G*VC950714CXB*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6546328
	CA*F3636*6D**+TXV	G*VM960603BxB*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6546329
	CA*F3636*6D**+TXV	G*VM960604CXB*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6546330
	CA*F3636*6D**+TXV	D*80VC0604B*A*	28,800	20,800	15.00	12.50	19,300	16,200			28,600	8.50	16,600		1,000	6547466
	CA*F3636*6D**+TXV	D*96VC0453BxA*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6547467
	CA*F3636*6D**+TXV	D*96VC0704CXA*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6547468
	CA*F3636*6D**+TXV	D*96VC0714CXA*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6547469
	CA*F3636*6D**+TXV	D*96MC0603BxA*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6592128
	CA*F3636*6D**+TXV	D*96MC0604CXA*	28,800	20,800	15.00	12.00	19,300	16,200			28,000	8.50	18,000		950	6592129

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³				HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW				
DZ14SA 0301A*	CA*F3642*6D*+MBR1600**_1+TXV		28,800	20,800	14.00	12.00	19,300	16,200	29,000	8.50	18,000	1,050	6546331		
	CA*F3743*6D*+EEP+TXV		28,400	20,600	14.00	12.00	19,000	16,000	28,200	8.50	18,000	1,000	6546332		
	CA*F3743*6D*+MBVC1600**_1A*+TXV		28,800	20,800	15.00	12.50	19,300	16,200	27,400	8.50	18,000	1,000	6546333		
	CA*F3743*6D*+TXV	DB80VC0805C*A*	28,800	20,800	14.50	12.20	19,300	16,200	27,400	8.50	16,600	990	6546334		
	CA*F3743*6D*+TXV	G*E80805C*B*	28,800	20,800	14.50	12.20	19,300	16,200	27,800	8.50	16,600	1,060	6546335		
	CA*F3743*6D*+TXV	G*E81005C*B*	28,800	20,800	14.50	12.20	19,300	16,200	27,800	8.50	16,600	1,080	6546336		
	CA*F3743*6D*+TXV	G*VC80805C*B*	28,800	20,800	14.50	12.20	19,300	16,200	28,000	8.50	16,600	990	6546337		
	CA*F3743*6D*+TXV	G*VC950704CXB*	28,800	20,800	14.50	12.00	19,300	16,200	27,600	8.50	16,200	1,000	6546338		
	CA*F3743*6D*+TXV	G*VC950714CXB*	28,800	20,800	14.50	12.00	19,300	16,200	27,800	8.20	18,000	1,000	6546339		
	CA*F3743*6D*+TXV	G*VM960604CXB*	28,800	20,800	14.50	12.00	19,300	16,200	27,800	8.20	18,000	1,000	6546340		
	CA*F3743*6D*+TXV	D*80HE0805C*A*	28,800	20,800	14.50	12.20	19,300	16,200	27,800	8.50	16,600	1,060	6547472		
	CA*F3743*6D*+TXV	D*80HE1005C*A*	28,800	20,800	14.50	12.20	19,300	16,200	27,800	8.50	16,600	1,080	6547473		
	CA*F3743*6D*+TXV	D*80VC0805C*A*	28,800	20,800	14.50	12.20	19,300	16,200	28,000	8.50	16,600	990	6547474		
	CA*F3743*6D*+TXV	D*96VC0704CXA*	28,800	20,800	14.50	12.00	19,300	16,200	27,600	8.50	16,200	1,000	6547475		
	CA*F3743*6D*+TXV	D*96VC0714CXA*	28,800	20,800	14.50	12.00	19,300	16,200	27,800	8.20	18,000	1,000	6547476		
	CA*F3743*6D*+TXV	D*96MC0604CXA*	28,800	20,800	14.50	12.00	19,300	16,200	27,800	8.20	18,000	1,000	6592130		
	CAPT3743*4A*	G*E80805C*B*	28,800	20,800	14.50	12.00	19,300	16,200	26,800	8.20	16,600	850	6546341		
	CAPT3743*4A*	G*E81005C*B*	28,800	20,800	14.50	12.00	19,300	16,200	26,800	8.20	16,600	1,080	6546342		
	CAPT3743*4A*	G*VC950704CXB*	28,800	20,800	14.50	12.00	19,300	16,200	26,600	8.50	16,200	875	6546343		
	CAPT3743*4A*	G*VC950714CXB*	28,800	20,800	14.50	12.00	19,300	16,200	26,600	8.20	18,000	875	6546344		
	CAPT3743*4A*	G*VM960604CXB*	28,800	20,800	14.50	12.00	19,300	16,200	26,600	8.20	18,000	855	6546345		
	CAPT3743*4A*	D*80HE0805C*A*	28,800	20,800	14.50	12.00	19,300	16,200	26,800	8.20	16,600	850	6547478		
	CAPT3743*4A*	D*80HE1005C*A*	28,800	20,800	14.50	12.00	19,300	16,200	26,800	8.20	16,600	1,080	6547479		
	CAPT3743*4A*	D*96VC0704CXA*	28,800	20,800	14.50	12.00	19,300	16,200	26,600	8.50	16,200	875	6547480		
	CAPT3743*4A*	D*96VC0714CXA*	28,800	20,800	14.50	12.00	19,300	16,200	26,600	8.20	18,000	875	6547481		
	CAPT3743*4A*	D*96MC0604CXA*	28,800	20,800	14.50	12.00	19,300	16,200	26,600	8.20	18,000	855	6592131		
	CAPT3743*4A*+EEP		28,400	20,600	14.00	12.00	19,000	16,000	27,200	8.00	18,000	850	6546346		
	CAPT3743*4A*+MBVC1600**_1A*		28,800	20,800	15.00	12.50	19,300	16,200	26,800	8.20	18,000	890	6546347		
	CHPF3636B6C*+MBVC1200**_1A*+TXV		30,000	21,600	15.00	13.00	20,200	16,900	28,000	8.50	18,000	1,050	6546348		
	CHPF3642C6C*+EEP+TXV		28,800	20,800	14.00	12.00	19,300	16,200	28,000	8.50	18,000	1,000	6546349		
	CHPF3642C6C*+MBR1600**_1+TXV		28,800	20,800	14.00	12.00	19,300	16,200	29,000	8.50	18,000	1,000	6546350		
	CHPF3642C6C*+MBVC1600**_1A*+TXV		28,800	20,800	15.00	12.50	19,300	16,200	29,000	8.50	18,000	1,000	6546351		
	CHPF3642C6C*+TXV	G*E80805C*B*	28,800	20,800	14.50	12.20	19,300	16,200	28,400	8.50	16,600	1,060	6546352		
	CHPF3642C6C*+TXV	G*E81005C*B*	28,800	20,800	14.50	12.20	19,300	16,200	28,200	8.50	16,600	1,080	6546353		
	CHPF3642C6C*+TXV	G*VC80805C*B*	28,800	20,800	14.50	12.20	19,300	16,200	28,600	8.50	16,600	990	6546354		
	CHPF3642C6C*+TXV	G*VC950704CXB*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.50	18,000	950	6546355		
	CHPF3642C6C*+TXV	G*VM960604CXB*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.20	18,000	950	6546356		
	CHPF3642C6C*+TXV	D*80HE0805C*A*	28,800	20,800	14.50	12.20	19,300	16,200	28,400	8.50	16,600	1,060	6547483		
	CHPF3642C6C*+TXV	D*80HE1005C*A*	28,800	20,800	14.50	12.20	19,300	16,200	28,200	8.50	16,600	1,080	6547484		

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	Low		
DZ14SA 0301A*	CHPF3642C6C*+TXV	D*80VC0805C*A*	28,800	20,800	14.50	12.20	19,300	16,200	28,600	8.50	16,600	990	6547485
	CHPF3642C6C*+TXV	D*96VC0704CXA*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.50	18,000	950	6547486
	CHPF3642C6C*+TXV	D*96MC0604CXA*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.20	18,000	950	6592132
	CHPF3743C6B*+MBVC1600**,-1A*+TXV		28,800	20,800	15.00	12.50	19,300	16,200	29,000	8.50	18,000	1,000	6546357
	CHPF3743C6B*+TXV	G*VC950704CXB*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.50	18,000	950	6546358
	CHPF3743C6B*+TXV	G*VM960604CXB*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.20	18,000	950	6546359
	CHPF3743C6B*+TXV	D*96VC0704CXA*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.50	18,000	950	6547488
	CHPF3743C6B*+TXV	D*96MC0604CXA*	28,800	20,800	14.50	12.20	19,300	16,200	29,000	8.20	18,000	950	6592133
	CSCF3642N6D*+TXV	G*VC950704CXB*	28,800	20,800	14.50	12.00	19,300	16,200	28,800	8.50	17,800	900	6546360
	CSCF3642N6D*+TXV	D*96VC0704CXA*	28,800	20,800	14.50	12.00	19,300	16,200	28,800	8.50	17,800	900	6547490
	DV36PTC14A*		28,000	20,200	15.00	12.50	18,800	15,800	27,000	8.50	15,600	930	6546318
DZ14SA 0361A*	ARPT36C14A*		33,000	25,200	13.50	11.00	23,400	19,600	33,200	8.10	20,000	1,235	6546361
	ARPT36D14A*		33,400	25,600	14.00	11.50	23,600	19,800	30,000	8.30	20,000	1,120	6546362
	ARUF48D14A*		34,000	26,000	13.00	11.50	24,000	20,200	33,000	8.20	20,000	1,125	6546363
	ASPT36C14A*		32,000	24,400	14.00	12.00	22,600	19,000	32,000	8.20	19,300	1,095	6546368
	ASPT42C14A*		33,000	25,200	14.00	12.00	23,400	19,600	33,000	8.00	19,000	1,125	7041806
	ASPT42D14A*		34,200	26,200	15.00	12.50	24,200	20,400	32,000	8.50	19,000	1,145	6546369
	ASUF39C14A*		33,600	25,600	14.00	12.00	23,800	20,000	32,000	8.20	19,000	1,200	6563955
	ASUF39C14A*+TXV		33,600	25,600	14.00	12.00	23,800	20,000	32,000	8.20	19,000	1,200	6563956
	AVPTC36C14A*		32,000	24,400	14.00	12.00	22,600	19,000	32,000	8.00	19,300	1,100	6563958
	AVPTC42D14A*		34,200	26,200	15.00	12.50	24,200	20,400	32,000	8.50	19,000	1,225	6546372
	AVPTC48C14A*		33,000	25,200	14.00	12.00	23,400	19,600	33,000	8.00	19,000	1,110	7041807
	AWUF37XX16B*+TXV		32,000	24,400	13.50	11.50	22,600	19,000	32,000	8.50	18,000	1,150	6546374
	CA*F4961*6D*	G*E80805C*B*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,290	6546375
	CA*F4961*6D*	G*E81005C*B*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,230	6546376
	CA*F4961*6D*	G*VC950704CXB*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6546377
	CA*F4961*6D*	G*VC950714CXB*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6546378
	CA*F4961*6D*	G*VC950905CXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6546379
	CA*F4961*6D*	G*VC950905DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.90	20,000	1,300	6546380
	CA*F4961*6D*	G*VC950915DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6546381
CA*F4961*6D*	G*VC951155DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6546382	
CA*F4961*6D*	G*VM960604CXB*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6546383	
CA*F4961*6D*	G*VM960805CXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6546384	
CA*F4961*6D*	G*VM960805DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6546385	
CA*F4961*6D*	G*VM961005DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6546386	
CA*F4961*6D*	G*VM961155DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6546387	
CA*F4961*6D*	D*80HE0805C*A*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,290	6547491	
CA*F4961*6D*	D*80HE1005C*A*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,230	6547492	
CA*F4961*6D*	D*96VC0704CXA*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6547493	

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0361A*	CA*F4961*6D*	D*96VC0714CXA*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6547494
	CA*F4961*6D*	D*96VC0905CXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6547495
	CA*F4961*6D*	D*96VC0905DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.90	20,000	1,300	6547496
	CA*F4961*6D*	D*96VC0915DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6547497
	CA*F4961*6D*	D*96VC1155DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6547498
	CA*F4961*6D*	D*96MCM0604CXA*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6592134
	CA*F4961*6D*	D*96MCM0805CXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6592135
	CA*F4961*6D*	D*96MCM0805DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6592136
	CA*F4961*6D*	D*96MCM1005DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6592137
	CA*F4961*6D*	D*96MCM1155DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6592138
	CA*F4961*6D**EEP		34,800	26,600	14.00	12.00	24,600	20,600	33,400	8.50	20,000	1,250	6546388
	CA*F4961*6D**EEP+TXV		35,000	26,800	14.00	12.00	24,800	20,800	33,400	8.50	20,000	1,250	6546389
	CA*F4961*6D**+MBR1600**1		34,600	26,400	14.00	12.00	24,400	20,600	33,400	8.50	20,000	1,275	6546390
	CA*F4961*6D**+MBR1600**1+TXV		34,600	26,400	14.00	12.00	24,400	20,600	33,400	8.50	20,000	1,275	6546391
	CA*F4961*6D**+MBVC1600**1A*		35,000	26,800	14.50	12.20	24,800	20,800	33,000	9.00	20,000	1,250	6546392
	CA*F4961*6D**+MBVC1600**1A*+TXV		35,000	26,800	14.50	12.20	24,800	20,800	33,000	9.00	20,000	1,250	6546393
	CA*F4961*6D**+MBVC2000**1A*		35,000	26,800	15.00	13.00	24,800	20,800	33,000	9.00	20,000	1,250	6546395
	CA*F4961*6D**+MBVC2000**1A*+TXV		35,000	26,800	15.00	13.00	24,800	20,800	33,000	9.00	20,000	1,250	6546396
	CA*F4961*6D**+TXV	G*E80805C*B*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,290	6546397
	CA*F4961*6D**+TXV	G*E81005C*B*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,230	6546399
	CA*F4961*6D**+TXV	G*VC950704CXB*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6546400
	CA*F4961*6D**+TXV	G*VC950714CXB*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6546402
	CA*F4961*6D**+TXV	G*VC950905CXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6546404
	CA*F4961*6D**+TXV	G*VC950905DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.90	20,000	1,300	6546406
	CA*F4961*6D**+TXV	G*VC950915DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,300	6546407
	CA*F4961*6D**+TXV	G*VC951155DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6546409
	CA*F4961*6D**+TXV	G*VM960604CXB*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6546411
	CA*F4961*6D**+TXV	G*VM960805CXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6546413
	CA*F4961*6D**+TXV	G*VM960805DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,300	6546414
	CA*F4961*6D**+TXV	G*VM961005DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6546417
	CA*F4961*6D**+TXV	G*VM961155DXB*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6546418
	CA*F4961*6D**+TXV	D*80HE0805C*A*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,290	6547504
	CA*F4961*6D**+TXV	D*80HE1005C*A*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,230	6547505
	CA*F4961*6D**+TXV	D*96VC0704CXA*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6547506
	CA*F4961*6D**+TXV	D*96VC0714CXA*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6547507
	CA*F4961*6D**+TXV	D*96VC0905CXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6547508
	CA*F4961*6D**+TXV	D*96VC0905DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.90	20,000	1,300	6547509
	CA*F4961*6D**+TXV	D*96VC0915DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,300	6547510
	CA*F4961*6D**+TXV	D*96VC1155DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6547511

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0361A*	CA*F4961*6D*+TXV	D*96MC0604CXA*	34,600	26,400	14.50	12.20	24,400	20,600	33,400	8.50	20,000	1,250	6592139
	CA*F4961*6D*+TXV	D*96MC0805CXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.70	20,000	1,300	6592140
	CA*F4961*6D*+TXV	D*96MC0805DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,300	6592141
	CA*F4961*6D*+TXV	D*96MC1005DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6592142
	CA*F4961*6D*+TXV	D*96MC1155DXA*	35,000	26,800	15.00	12.50	24,800	20,800	33,400	8.80	20,000	1,250	6592143
	CHPF3743C6B*+MBVC1600*-1A*	G*VC950704CXB*	33,400	25,600	14.50	12.00	23,600	19,800	33,000	8.50	18,000	1,250	6546420
	CHPF4860D6D*	G*VC951155DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546422
	CHPF4860D6D*	G*VM960604CXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546424
	CHPF4860D6D*	G*VM961005DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.50	20,000	1,250	6546426
	CHPF4860D6D*	G*VM961155DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546427
	CHPF4860D6D*	D*96VC0704CXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546428
	CHPF4860D6D*	D*96VC1155DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6547517
	CHPF4860D6D*	D*96MC0604CXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.50	20,000	1,250	6592144
	CHPF4860D6D*	D*96MC1005DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6592145
	CHPF4860D6D*	D*96MC1155DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6592146
	CHPF4860D6D*+EEP		34,800	26,600	14.00	12.00	24,600	20,600	33,000	8.60	20,000	1,250	6546430
	CHPF4860D6D*+EEP+TXV		35,000	26,800	14.00	12.00	24,800	20,800	33,000	8.60	20,000	1,250	6546432
	CHPF4860D6D*+MBVC2000*-1A*		34,600	26,400	15.00	13.00	24,400	20,600	33,000	9.00	20,000	1,200	6546434
	CHPF4860D6D*+MBVC2000*-1A*+TXV		34,600	26,400	15.00	13.00	24,400	20,600	33,000	9.00	20,000	1,200	6546435
	CHPF4860D6D*+TXV	G*VC950905DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,275	6546437
	CHPF4860D6D*+TXV	G*VC951155DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546439
	CHPF4860D6D*+TXV	G*VM961005DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546440
	CHPF4860D6D*+TXV	G*VM961155DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6546441
	CHPF4860D6D*+TXV	D*96VC0905DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,275	6547522
	CHPF4860D6D*+TXV	D*96VC1155DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6547523
	CHPF4860D6D*+TXV	D*96MC1005DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6592147
	CHPF4860D6D*+TXV	D*96MC1155DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,400	8.80	20,000	1,250	6592148
	CSCF4860N6D*	G*VC951155DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,200	8.80	20,000	1,225	6546442
	CSCF4860N6D*	D*96VC1155DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,200	8.80	20,000	1,225	6547526
	CSCF4860N6D*+MBVC1600*-1A*+TXV		34,600	26,400	15.00	12.50	24,400	20,600	33,200	8.80	20,000	1,200	6546443
	CSCF4860N6D*+MBVC2000*-1A*+TXV		34,600	26,400	15.00	12.50	24,400	20,600	33,200	8.80	20,000	1,175	6546444
	CSCF4860N6D*+TXV	G*VC951155DXB*	34,600	26,400	15.00	12.50	24,400	20,600	33,200	8.80	20,000	1,225	6546445
	CSCF4860N6D*+TXV	D*96VC1155DXA*	34,600	26,400	15.00	12.50	24,400	20,600	33,200	8.80	20,000	1,225	6547527
	DV36PTCC14A*		32,000	24,400	14.00	12.00	22,600	19,000	32,000	8.00	19,300	1,100	6546370
	DV42PTCD14A*		34,200	26,200	15.00	12.50	24,200	20,400	32,000	8.50	19,000	1,225	6546373
	DV48PTCC14A*		33,000	25,200	14.00	12.00	23,400	19,600	33,000	8.00	19,000	1,110	7041808

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0381A*	ASPT36C14A*		33,000	25,400	15.00	12.50	23,600	19,300	33,000	8.20	20,400	1,100	7065444
	ASPT42C14A*		33,600	25,800	15.00	12.50	24,000	19,600	34,000	9.00	20,600	1,175	7065442
	ASPT42D14A*		33,000	25,400	15.00	12.50	23,600	19,300	33,000	8.50	20,400	1,145	7065445
	ASUF39C14A*+TXV		33,000	25,400	15.00	12.50	23,600	19,300	33,000	8.20	20,400	1,100	7065446
	AVPTC42D14A*		33,000	25,400	15.00	12.50	23,600	19,300	33,000	8.50	20,400	1,225	7065447
	AVPTC48C14A*		33,600	25,800	15.00	12.50	24,000	19,600	34,000	9.00	20,600	1,150	7065443
	AVPTC48D14A*		34,600	26,600	16.00	13.00	24,600	20,200	34,000	9.00	21,000	1,150	7065448
	AWUF37XX16B*+TXV		32,000	24,600	14.00	11.50	22,800	18,700	32,000	8.50	18,000	1,150	7065450
	CA*F3743*6D*+TXV	ADVC80805C*B*	34,600	26,600	15.00	12.50	24,600	20,200	34,000	9.00	21,000	1,200	7065458
	CA*F3743*6D*+TXV	G*E80805C*B*	34,600	26,600	15.00	12.50	24,600	20,200	34,000	9.00	21,000	1,200	7065460
	CA*F3743*6D*+TXV	G*VC80604B*B*	34,000	26,200	15.00	12.50	24,200	19,900	34,000	8.50	21,000	1,220	7065462
	CA*F3743*6D*+TXV	G*VC80805C*B*	34,600	26,600	15.00	12.50	24,600	20,200	34,000	9.00	21,000	1,200	7065464
	CA*F3743*6D*+TXV	G*VC950905DXB*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065469
	CA*F3743*6D*+TXV	G*VC950915DXB*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065474
	CA*F3743*6D*+TXV	G*VC951155DXB*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065477
	CA*F3743*6D*+TXV	G*VM960805DXB*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065482
	CA*F3743*6D*+TXV	G*VM961005DXB*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065486
	CA*F3743*6D*+TXV	G*VM961155DXB*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065489
	CA*F3743*6D*+TXV	DD80VC0805C*A*	34,600	26,600	15.00	12.50	24,600	20,200	34,000	9.00	21,000	1,200	7065492
	CA*F3743*6D*+TXV	D*80HE0805C*A*	34,600	26,600	15.00	12.50	24,600	20,200	34,000	9.00	21,000	1,200	7065494
	CA*F3743*6D*+TXV	D*80VC0604B*A*	34,000	26,200	15.00	12.50	24,200	19,900	34,000	8.50	21,000	1,220	7065496
	CA*F3743*6D*+TXV	D*80VC0805C*A*	34,600	26,600	15.00	12.50	24,600	20,200	34,000	9.00	21,000	1,200	7065498
	CA*F3743*6D*+TXV	D*96VC0905DXA*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065503
	CA*F3743*6D*+TXV	D*96VC0915DXA*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065508
	CA*F3743*6D*+TXV	D*96VC1155DXA*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065511
	CA*F3743*6D*+TXV	D*96MC0805DXA*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065516
	CA*F3743*6D*+TXV	D*96MC1005DXA*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065520
	CA*F3743*6D*+TXV	D*96MC1155DXA*	34,600	26,600	15.00	12.50	24,600	20,200	34,400	9.00	21,000	1,100	7065523
	CA*F4961*6D*+EHP+TXV		34,600	26,600	14.50	12.20	24,600	20,200	34,400	8.20	21,000	1,100	7065451
	CA*F4961*6D*+MBVC2000**_1A*+TXV		34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,150	7065452
	CA*F4961*6D*+TXV	G*VC950704CXB*	35,000	27,000	15.50	12.50	25,000	20,400	34,000	9.00	23,000	1,200	7065466
	CA*F4961*6D*+TXV	G*VC950714CXB*	35,000	27,000	15.50	12.50	25,000	20,400	34,000	9.00	23,000	1,200	7065468
	CA*F4961*6D*+TXV	G*VC950905DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065470
	CA*F4961*6D*+TXV	G*VC950915DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065475
	CA*F4961*6D*+TXV	G*VM960604CXB*	35,000	27,000	15.00	12.50	25,000	20,400	34,000	9.00	23,000	1,200	7065481
	CA*F4961*6D*+TXV	G*VM960805DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065483
	CA*F4961*6D*+TXV	D*96VC0704CXA*	35,000	27,000	15.50	12.50	25,000	20,400	34,000	9.00	23,000	1,200	7065500
	CA*F4961*6D*+TXV	D*96VC0714CXA*	35,000	27,000	15.50	12.50	25,000	20,400	34,000	9.00	23,000	1,200	7065502
	CA*F4961*6D*+TXV	D*96VC0905DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065504

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0381A*	CA*F49G1*6D**+TXV	D*96VC0915DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065509
	CA*F49G1*6D**+TXV	D*96MC0604CXA*	35,000	27,000	15.00	12.50	25,000	20,400	34,000	9.00	23,000	1,200	7065515
	CA*F49G1*6D**+TXV	D*96MC0805DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065517
	CAPT3743*4A*	ADV80805C*B*	33,400	25,800	15.00	12.50	23,800	19,500	33,000	9.00	21,000	990	7065459
	CAPT3743*4A*	G*E80805C*B*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	995	7065461
	CAPT3743*4A*	G*VC80604B*B*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	8.50	21,000	1,000	7065463
	CAPT3743*4A*	G*VC80805C*B*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	1,000	7065465
	CAPT3743*4A*	G*VC950905DXB*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	1,005	7065471
	CAPT3743*4A*	G*VC950915DXB*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	1,000	7065476
	CAPT3743*4A*	G*VC951155DXB*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,020	7065478
	CAPT3743*4A*	G*VM960805DXB*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,000	7065484
	CAPT3743*4A*	G*VM961005DXB*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,020	7065487
	CAPT3743*4A*	G*VM961155DXB*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,020	7065490
	CAPT3743*4A*	DD80VC0805C*A*	33,400	25,800	15.00	12.50	23,800	19,500	33,000	9.00	21,000	990	7065493
	CAPT3743*4A*	D*80HE0805C*A*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	995	7065495
	CAPT3743*4A*	D*80VC0604B*A*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	8.50	21,000	1,000	7065497
	CAPT3743*4A*	D*80VC0805C*A*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	1,000	7065499
	CAPT3743*4A*	D*96VC0905DXA*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	1,005	7065505
	CAPT3743*4A*	D*96VC0915DXA*	33,400	25,800	15.00	12.50	23,800	19,500	33,200	9.00	21,000	1,000	7065510
	CAPT3743*4A*	D*96VC1155DXA*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,020	7065512
	CAPT3743*4A*	D*96MC0805DXA*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,000	7065518
	CAPT3743*4A*	D*96MC1005DXA*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,020	7065521
	CAPT3743*4A*	D*96MC1155DXA*	33,400	25,800	15.00	12.50	23,800	19,500	33,600	9.00	21,000	1,020	7065524
	CAPT3743*4A**+EEP		32,400	25,000	14.00	11.50	23,000	18,900	32,000	8.00	20,000	1,000	7065453
	CAPT3743*4A**+MBVC1600**-1A*		32,400	25,000	15.00	12.50	23,000	18,900	32,000	8.50	20,000	1,000	7065454
	CHPF3743D6B**+MBVC2000**-1A**+TXV		34,600	26,600	15.00	12.50	24,600	20,200	34,400	8.50	21,000	1,200	7065455
	CHPF4860D6D**+EEP+TXV		34,600	26,600	14.50	12.20	24,600	20,200	34,400	8.20	21,000	1,100	7065456
	CHPF4860D6D**+MBVC2000**-1A**+TXV		34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,150	7065457
	CHPF4860D6D**+TXV	G*VC950905DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065472
	CHPF4860D6D**+TXV	G*VC951155DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065479
	CHPF4860D6D**+TXV	G*VM960805DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065485
	CHPF4860D6D**+TXV	G*VM961005DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065488
	CHPF4860D6D**+TXV	G*VM961155DXB*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065491
	CHPF4860D6D**+TXV	D*96VC0905DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065506
	CHPF4860D6D**+TXV	D*96VC1155DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065513
	CHPF4860D6D**+TXV	D*96MC0805DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065519
	CHPF4860D6D**+TXV	D*96MC1005DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065522
	CHPF4860D6D**+TXV	D*96MC1155DXA*	34,600	26,600	16.00	13.00	24,600	20,200	34,400	9.00	21,000	1,100	7065525
	CSCF4860N6D**+TXV	G*VC950704CXB*	35,000	27,000	15.50	12.50	25,000	20,400	34,600	9.00	21,000	1,225	7065467

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³				HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	SEER ¹	EER ²	HI	HSPF ⁴	LOW		
DZ14SA 0381A*	CSCF4860N6D*+TXV	G*VC950905DXB*	34,600	26,600	16.00	13.00	24,600	20,200	16.00	13.00	34,400	9.00	21,000	1,150	7065473
	CSCF4860N6D*+TXV	G*VC951155DXB*	34,600	26,600	16.00	13.00	24,600	20,200	16.00	13.00	34,400	9.00	21,000	1,150	7065480
	CSCF4860N6D*+TXV	D*96VC0704CXA*	35,000	27,000	15.50	12.50	25,000	20,400	15.50	12.50	34,600	9.00	21,000	1,225	7065501
	CSCF4860N6D*+TXV	D*96VC0905DXA*	34,600	26,600	16.00	13.00	24,600	20,200	16.00	13.00	34,400	9.00	21,000	1,150	7065507
	CSCF4860N6D*+TXV	D*96VC1155DXA*	34,600	26,600	16.00	13.00	24,600	20,200	16.00	13.00	34,400	9.00	21,000	1,150	7065514
	DV48PTCC14A*		33,600	25,800	15.00	12.50	24,000	19,600	15.00	12.50	34,000	9.00	20,600	1,150	7065449
DZ14SA 0421A*	ARPT42D14A*		40,000	29,400	14.00	11.50	27,200	22,400	14.00	11.50	40,000	8.50	24,200	1,330	6546446
	ARPT48D14A*		40,500	29,800	14.00	12.00	27,600	22,600	14.00	12.00	40,000	8.50	24,200	1,280	6546447
	ARUF48D14A*		40,000	29,400	13.00	11.00	27,200	22,400	13.00	11.00	40,000	8.00	24,200	1,350	6546448
	ARUF48D14A*+TXV		40,000	29,400	14.00	11.50	27,200	22,400	14.00	11.50	40,000	8.20	24,200	1,280	6546449
	ASPT48C14A*		39,000	28,600	14.00	12.00	26,600	21,800	14.00	12.00	40,000	9.00	23,000	1,400	7080514
	ASPT48D14A*		41,500	30,600	15.00	12.50	28,400	23,200	15.00	12.50	40,000	9.00	23,000	1,410	6546452
	ASPT60D14A*		41,500	30,600	15.00	12.50	28,400	23,200	15.00	12.50	40,000	9.00	23,000	1,410	6546453
	ASUF49C14A*		38,000	28,000	13.50	11.00	26,000	21,200	13.50	11.00	39,500	8.00	24,000	1,350	6546454
	AVPTC48C14A*		39,000	28,600	14.00	12.00	26,600	21,800	14.00	12.00	40,000	9.00	23,000	1,400	7080515
	AVPTC48D14A*		41,500	30,600	15.00	12.50	28,400	23,200	15.00	12.50	40,000	9.00	23,000	1,400	6546456
	AVPTC60D14A*		41,500	30,600	15.00	12.50	28,400	23,200	15.00	12.50	40,000	9.00	23,000	1,420	6546459
	CA*F4860*6D*+TXV	G*VC950704CXB*	40,000	29,400	14.50	12.20	27,200	22,400	14.50	12.20	41,000	8.75	25,000	1,200	6546463
	CA*F4860*6D*+TXV	G*VC950714CXB*	40,000	29,400	14.50	12.20	27,200	22,400	14.50	12.20	41,000	8.75	25,000	1,200	6546465
	CA*F4860*6D*+TXV	D*96VC0704CXA*	40,000	29,400	14.50	12.20	27,200	22,400	14.50	12.20	41,000	8.75	25,000	1,200	6547528
	CA*F4860*6D*+TXV	D*96VC0714CXA*	40,000	29,400	14.50	12.20	27,200	22,400	14.50	12.20	41,000	8.75	25,000	1,200	6547529
	CA*F4961*6D*	G*VC81005C*B*	40,000	29,400	14.50	12.50	27,200	22,400	14.50	12.50	40,500	8.50	25,000	1,370	6546467
	CA*F4961*6D*	G*VC950905DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546469
	CA*F4961*6D*	G*VC950915DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546471
	CA*F4961*6D*	G*VC951155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546473
	CA*F4961*6D*	G*VM961005DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546475
	CA*F4961*6D*	G*VM961155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546477
	CA*F4961*6D*	D*80VC1005C*A*	40,000	29,400	14.50	12.50	27,200	22,400	14.50	12.50	40,500	8.50	25,000	1,370	6547530
	CA*F4961*6D*	D*96VC0905DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6547531
	CA*F4961*6D*	D*96VC0915DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6547532
	CA*F4961*6D*	D*96VC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6547533
	CA*F4961*6D*	D*96MVC1005DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6592149
	CA*F4961*6D*	D*96MVC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6592150
	CA*F4961*6D*+EEP		41,000	30,200	14.00	12.00	28,000	23,000	14.00	12.00	41,000	9.00	27,400	1,250	6546479
	CA*F4961*6D*+EEP+TXV		41,000	30,200	14.00	12.00	28,000	23,000	14.00	12.00	41,000	9.00	27,400	1,250	6546481
	CA*F4961*6D**+MBR2000**-1		40,000	29,400	14.00	12.00	27,200	22,400	14.00	12.00	41,000	9.00	25,000	1,350	6546483
	CA*F4961*6D**+MBR2000**-1+TXV		40,000	29,400	14.00	12.00	27,200	22,400	14.00	12.00	41,000	9.00	25,000	1,350	6546485
	CA*F4961*6D**+MBVC2000**-1A*		40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,350	6546488
	CA*F4961*6D**+MBVC2000**-1A*+TXV		40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,350	6546489

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0421A*	CA*F4961*6D**TXV	DD80VC0805C*A*	38,500	28,200	14.50	11.50	26,200	21,600	40,500	9.00	25,000	1,190	6546491
	CA*F4961*6D**TXV	G*VC80805C*B*	39,000	28,600	14.50	11.80	26,600	21,800	40,500	9.00	25,000	1,190	6546494
	CA*F4961*6D**TXV	G*VC81005C*B*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	8.50	25,000	1,370	6546496
	CA*F4961*6D**TXV	G*VC950905CXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,325	6546498
	CA*F4961*6D**TXV	G*VC950905DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546499
	CA*F4961*6D**TXV	G*VC950915DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546502
	CA*F4961*6D**TXV	G*VC951155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546504
	CA*F4961*6D**TXV	G*VM961005DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546506
	CA*F4961*6D**TXV	G*VM961155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546508
	CA*F4961*6D**TXV	D*80VC0805C*A*	39,000	28,600	14.50	11.80	26,600	21,800	40,500	9.00	25,000	1,190	6547536
	CA*F4961*6D**TXV	D*80VC1005C*A*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	8.50	25,000	1,370	6547537
	CA*F4961*6D**TXV	D*96VC0905CXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,325	6547538
	CA*F4961*6D**TXV	D*96VC0905DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6547539
	CA*F4961*6D**TXV	D*96VC0915DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6547540
	CA*F4961*6D**TXV	D*96VC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6547541
	CA*F4961*6D**TXV	D*96MVC1005DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6592151
	CA*F4961*6D**TXV	D*96MVC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6592152
	CAPT4961*4A*	DD80VC0805C*A*	38,500	28,200	14.50	11.50	26,200	21,600	40,500	9.00	25,000	1,375	6546509
	CAPT4961*4A*	G*VC80805C*B*	39,000	28,600	14.50	11.80	26,600	21,800	40,500	9.00	25,000	1,390	6546512
	CAPT4961*4A*	G*VC950905DXB*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,315	6546513
	CAPT4961*4A*	G*VC950915DXB*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,295	6546516
	CAPT4961*4A*	G*VC951155DXB*	40,000	29,400	15.00	13.00	27,200	22,400	40,500	9.00	25,000	1,405	6546518
	CAPT4961*4A*	G*VM961005DXB*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,405	6546520
	CAPT4961*4A*	G*VM961155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,405	6546521
	CAPT4961*4A*	D*80VC0805C*A*	39,000	28,600	14.50	11.80	26,600	21,800	40,500	9.00	25,000	1,390	6547544
	CAPT4961*4A*	D*96VC0905DXA*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,315	6547545
	CAPT4961*4A*	D*96VC0915DXA*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,295	6547546
	CAPT4961*4A*	D*96VC1155DXA*	40,000	29,400	15.00	13.00	27,200	22,400	40,500	9.00	25,000	1,405	6547547
	CAPT4961*4A*	D*96MVC1005DXA*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,405	6592153
	CAPT4961*4A*	D*96MVC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	40,500	9.00	25,000	1,405	6592154
	CAPT4961*4A**HEEP		41,000	30,200	14.00	12.00	28,000	23,000	41,000	8.50	27,400	1,350	6546523
	CAPT4961*4A**+MBR2000**-1		40,000	29,400	14.00	12.00	27,200	22,400	41,000	9.00	25,000	1,380	6546525
	CAPT4961*4A**+MBVC2000**-1A*		40,000	29,400	15.00	13.00	27,200	22,400	40,000	9.00	25,000	1,315	6546527
	CHPF4860D6D*	G*VC950905DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546529
	CHPF4860D6D*	G*VC951155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546531
	CHPF4860D6D*	G*VM961005DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546533
	CHPF4860D6D*	G*VM961155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6546535
	CHPF4860D6D*	D*96VC0905DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6547550
	CHPF4860D6D*	D*96VC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	41,000	9.00	25,000	1,200	6547551

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³				HEATING CAPACITY (BTU/H)			CFM	AHRI #
			TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	SEER ¹	EER ²	HI	HSPF ⁴	LOW		
DZ14SA 0421A*	CHPF4860D6D*	D*96MC1005DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6592155
	CHPF4860D6D*	D*96MC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6592156
	CHPF4860D6D**+EEP		41,000	30,200	14.00	12.00	28,000	23,000	14.00	12.00	41,000	9.00	27,400	1,250	6546536
	CHPF4860D6D**+EEP+TXV		40,000	29,400	14.00	12.00	27,200	22,400	14.00	12.00	41,000	9.00	27,400	1,300	6546538
	CHPF4860D6D**+MBR2000**-1+TXV		40,000	29,400	14.00	12.00	27,200	22,400	14.00	12.00	41,000	9.00	27,400	1,250	6546541
	CHPF4860D6D**+MBVC2000**-1A*		40,000	29,400	15.00	12.00	27,200	22,400	15.00	12.00	41,000	9.00	25,000	1,350	6546543
	CHPF4860D6D**+MBVC2000**-1A*+TXV		40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,350	6546545
	CHPF4860D6D**+TXV	G*VC950905DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546547
	CHPF4860D6D**+TXV	G*VC951155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546549
	CHPF4860D6D**+TXV	G*VM961005DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546550
	CHPF4860D6D**+TXV	G*VM961155DXB*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6546553
	CHPF4860D6D**+TXV	D*96VC0905DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6547554
	CHPF4860D6D**+TXV	D*96VC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6547555
	CHPF4860D6D**+TXV	D*96MC1005DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6592157
	CHPF4860D6D**+TXV	D*96MC1155DXA*	40,000	29,400	15.00	12.50	27,200	22,400	15.00	12.50	41,000	9.00	25,000	1,200	6592158
	DV48PTCC14A*		39,000	28,600	14.00	12.00	26,600	21,800	14.00	12.00	40,000	9.00	23,000	1,400	7080516
DZ14SA 0481A*	DV48PTCD14A*		41,500	30,600	15.00	12.50	28,400	23,200	15.00	12.50	40,000	9.00	23,000	1,400	6546457
	DV60PTCD14A*		41,500	30,600	15.00	12.50	28,400	23,200	15.00	12.50	40,000	9.00	23,000	1,420	6546461
	ARPT48D14A*		45,000	33,200	14.00	11.50	30,600	24,800	14.00	11.50	45,500	8.40	27,000	1,460	6546555
	ARPT60D14A*		45,000	33,200	14.00	11.50	30,600	24,800	14.00	11.50	45,500	8.40	27,000	1,460	6546556
	ARUF48D14A*+TXV		44,500	32,800	13.50	11.50	30,400	24,600	13.50	11.50	45,000	8.00	27,000	1,480	6546559
	ASPT48C14A*		44,000	32,400	14.00	12.00	30,000	24,200	14.00	12.00	45,000	8.50	26,000	1,475	7041809
	ASPT48D14A*		46,500	34,200	15.00	12.50	31,600	25,600	15.00	12.50	45,500	9.00	26,000	1,400	6546564
	ASPT60D14A*		46,500	34,200	15.00	12.50	31,600	25,600	15.00	12.50	45,500	9.00	26,000	1,400	6546567
	ASUF59D14A*		46,500	34,200	14.50	12.00	31,600	25,600	14.50	12.00	45,500	8.20	26,000	1,600	6546569
	ASUF59D14A*+TXV		46,500	34,200	15.00	12.50	31,600	25,600	15.00	12.50	45,500	8.50	26,000	1,600	6546571
	AVPTC48C14A*		44,000	32,400	14.00	12.00	30,000	24,200	14.00	12.00	45,000	8.50	26,000	1,445	7041810
	AVPTC48D14A*		46,500	34,200	15.00	12.50	31,600	25,600	15.00	12.50	45,500	9.00	26,000	1,480	6546575
	CA*F4961*6D*	G*VC91155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546579
	CA*F4961*6D*	G*VC950905CXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546581
	CA*F4961*6D*	G*VC950905DXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546583
	CA*F4961*6D*	G*VC950915DXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546585
	CA*F4961*6D*	G*VC951155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546586
	CA*F4961*6D*	G*VM960805CXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546588
	CA*F4961*6D*	G*VM960805DXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546591
	CA*F4961*6D*	G*VM961005DXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546593
	CA*F4961*6D*	G*VM961155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6546594
	CA*F4961*6D*	D*96VC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6547558
	CA*F4961*6D*	D*96VC0905CXA*	46,000	33,800	14.50	12.00	31,400	25,400	14.50	12.00	47,000	8.50	30,000	1,500	6547559

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0481A*	CA*F4961*6D*	D*96VC0905DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547560
	CA*F4961*6D*	D*96VC0915DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547561
	CA*F4961*6D*	D*96MC0805CXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592159
	CA*F4961*6D*	D*96MC0805DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592160
	CA*F4961*6D*	D*96MC1005DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592161
	CA*F4961*6D*	D*96MC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592162
	CA*F4961*6D**EEP		46,000	33,800	14.00	12.00	31,400	25,400	47,000	8.75	30,000	1,550	6546596
	CA*F4961*6D**EEP+TXV		46,000	33,800	14.00	12.00	31,400	25,400	47,000	8.75	30,000	1,550	6546599
	CA*F4961*6D**MBR2000**-1		46,000	33,800	14.00	12.00	31,400	25,400	47,000	8.50	30,000	1,550	6546601
	CA*F4961*6D**MBR2000**-1+TXV		46,000	33,800	14.00	12.00	31,400	25,400	47,000	8.50	30,000	1,550	6546602
	CA*F4961*6D**MBVC2000**-1A*		46,000	33,800	15.00	12.50	31,400	25,400	46,000	9.00	30,000	1,550	6546604
	CA*F4961*6D**MBVC2000**-1A*+TXV		46,000	33,800	15.00	12.50	31,400	25,400	46,000	9.00	30,000	1,550	6546607
	CA*F4961*6D**TXV	DD80VC0805C*A*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546608
	CA*F4961*6D**TXV	DD80VC1005C*A*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,550	6546611
	CA*F4961*6D**TXV	G*VC80805C*B*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,510	6546613
	CA*F4961*6D**TXV	G*VC81005C*B*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,520	6546614
	CA*F4961*6D**TXV	G*VC91155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546616
	CA*F4961*6D**TXV	G*VC950905CXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546618
	CA*F4961*6D**TXV	G*VC950905DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546620
	CA*F4961*6D**TXV	G*VC950915DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546622
	CA*F4961*6D**TXV	G*VC951155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546624
	CA*F4961*6D**TXV	G*VM960805CXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546626
	CA*F4961*6D**TXV	G*VM960805DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546628
	CA*F4961*6D**TXV	G*VM961005DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546629
	CA*F4961*6D**TXV	G*VM961155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546632
	CA*F4961*6D**TXV	D*80VC0805C*A*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,510	6547566
	CA*F4961*6D**TXV	D*80VC1005C*A*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,520	6547567
	CA*F4961*6D**TXV	D*96VC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547568
	CA*F4961*6D**TXV	D*96VC0905CXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547569
	CA*F4961*6D**TXV	D*96VC0905DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547570
	CA*F4961*6D**TXV	D*96VC0915DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547571
	CA*F4961*6D**TXV	D*96MC0805CXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592163
	CA*F4961*6D**TXV	D*96MC0805DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592164
	CA*F4961*6D**TXV	D*96MC1005DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592165
	CA*F4961*6D**TXV	D*96MC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592166
	CAPT4961*4A*	DD80VC0805C*A*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,500	6546633
	CAPT4961*4A*	DD80VC1005C*A*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,545	6546636
	CAPT4961*4A*	G*VC80805C*B*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,495	6546637
	CAPT4961*4A*	G*VC81005C*B*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,530	6546639

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³				HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi	HSPF ⁴	Low				
DZ14SA 0481A*	CAPT4961*4A*	G*VC91155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,395	6546641		
	CAPT4961*4A*	G*VC950905CXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,460	6546643		
	CAPT4961*4A*	G*VC950905DXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,460	6546645		
	CAPT4961*4A*	G*VC950915DXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,425	6546647		
	CAPT4961*4A*	G*VC951155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,395	6546648		
	CAPT4961*4A*	G*VM960805CXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,465	6546651		
	CAPT4961*4A*	G*VM960805DXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,425	6546652		
	CAPT4961*4A*	G*VM961005DXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,395	6546655		
	CAPT4961*4A*	G*VM961155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,395	6546656		
	CAPT4961*4A*	D*80VC0805C*A*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,495	6547576		
	CAPT4961*4A*	D*80VC1005C*A*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,530	6547577		
	CAPT4961*4A*	D*96VC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,395	6547578		
	CAPT4961*4A*	D*96VC0905CXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,460	6547579		
	CAPT4961*4A*	D*96VC0905DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,460	6547580		
	CAPT4961*4A*	D*96VC0915DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,425	6547581		
	CAPT4961*4A*	D*96MC0805CXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,500	8.50	30,000	1,465	6592167		
	CAPT4961*4A*	D*96MC0805DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,425	6592168		
	CAPT4961*4A*	D*96MC1005DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,395	6592169		
	CAPT4961*4A*	D*96MC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	46,000	8.50	30,000	1,395	6592170		
	CAPT4961*4A*+EEP		46,000	33,800	14.00	12.00	31,400	25,400	47,000	8.75	30,000	1,460	6546658		
	CAPT4961*4A*+MBR2000**-1		46,000	33,800	14.00	12.00	31,400	25,400	47,000	8.50	30,000	1,560	6546660		
	CAPT4961*4A*+MBVC2000**-1A*		46,000	33,800	15.00	13.00	31,400	25,400	46,000	9.00	30,000	1,450	6546663		
	CHPF4860D6D*	G*VC91155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546665		
	CHPF4860D6D*	G*VC951155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546667		
	CHPF4860D6D*	G*VM961005DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546668		
	CHPF4860D6D*	G*VM961155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546670		
	CHPF4860D6D*	D*96VC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6547586		
	CHPF4860D6D*	D*96MC1005DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592171		
	CHPF4860D6D*	D*96MC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6592172		
	CHPF4860D6D*+EEP		47,000	34,600	14.00	12.00	32,000	26,000	46,000	9.00	30,000	1,550	6546673		
	CHPF4860D6D*+EEP+TXV		47,000	34,600	14.00	12.00	32,000	26,000	46,000	9.00	30,000	1,550	6546675		
	CHPF4860D6D*+MBR2000**-1		46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,550	6546677		
	CHPF4860D6D*+MBR2000**-1+TXV		46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,550	6546679		
	CHPF4860D6D*+MBR2000**-1A*		46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,550	6546681		
	CHPF4860D6D*+MBVC2000**-1A*+TXV		46,000	33,800	15.00	12.50	31,400	25,400	46,000	8.50	30,000	1,550	6546683		
	CHPF4860D6D*+TXV	G*VC91155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546685		
	CHPF4860D6D*+TXV	G*VC951155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546687		
	CHPF4860D6D*+TXV	G*VM961005DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546689		
	CHPF4860D6D*+TXV	G*VM961155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	30,000	1,500	6546690		

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				HEATING CAPACITY (BTU/H)				CFM	AHRI #
			TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴		
DZ14SA 0481A*	CHPF4860D6D**+TXV	D*96VC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,500	6547589
	CHPF4860D6D**+TXV	D*96MC1005DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,500	6592173
	CHPF4860D6D**+TXV	D*96MC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,500	6592174
	CSCF4860N6D**+TXV	G*VC950905CXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,575	6546692
	CSCF4860N6D**+TXV	G*VC950905DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,575	6546695
	CSCF4860N6D**+TXV	G*VC951155DXB*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,550	6546697
	CSCF4860N6D**+TXV	D*96VC0905CXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,575	6547592
	CSCF4860N6D**+TXV	D*96VC0905DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,575	6547593
	CSCF4860N6D**+TXV	D*96VC1155DXA*	46,000	33,800	14.50	12.00	31,400	25,400	47,000	8.50	1,550	6547594
	DV48PTCC14A*		44,000	32,400	14.00	12.00	30,000	24,200	45,000	8.50	1,445	7041811
	DV48PTCD14A*		46,500	34,200	15.00	12.50	31,600	25,600	45,500	9.00	1,480	6546577
	ARPT60D14A*		55,500	39,500	13.00	11.50	36,600	28,800	57,500	8.50	1,780	6546698
	ASPT60D14A*		57,000	40,500	14.00	12.00	37,600	29,600	57,000	8.20	1,745	6546705
	ASUF59D14A*		57,000	40,500	14.00	12.00	37,600	29,600	60,500	8.20	1,580	6546707
DZ14SA 0601A*	ASUF59D14A**+TXV		57,000	40,500	14.00	12.00	37,600	29,600	60,500	8.20	1,600	6546709
	AVPTC60D14A*		57,000	40,500	14.00	12.00	37,600	29,600	57,000	8.20	1,630	6546713
	CA*F4961*6D*	G*VC950905CXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6546716
	CA*F4961*6D*	G*VC950905DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6546719
	CA*F4961*6D*	G*VC950915DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6546720
	CA*F4961*6D*	G*VC951155DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6546722
	CA*F4961*6D*	G*VM960805CXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6546724
	CA*F4961*6D*	G*VM960805DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6546727
	CA*F4961*6D*	G*VM961005DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6546729
	CA*F4961*6D*	G*VM961155DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6546730
	CA*F4961*6D*	D*96VC0905CXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6547595
	CA*F4961*6D*	D*96VC0905DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6547596
	CA*F4961*6D*	D*96VC0915DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6547597
	CA*F4961*6D*	D*96VC1155DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6547598
DZ14SA 0601A*	CA*F4961*6D**+MBR2000**-1	D*96MC0805CXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6592175
	CA*F4961*6D**+MBR2000**-1+TXV	D*96MC0805DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6592176
	CA*F4961*6D**+MBR2000**-1+TXV	D*96MC1005DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6592177
	CA*F4961*6D**+MBR2000**-1A*	D*96MC1005DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6592178
	CA*F4961*6D**+MBR2000**-1A*	D*96MC1155DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6592178
	CA*F4961*6D**+MBR2000**-1A*+TXV		57,000	40,500	14.00	12.00	37,600	29,600	58,000	8.75	1,800	6546733
	CA*F4961*6D**+MBR2000**-1A*+TXV		57,000	40,500	14.00	12.00	37,600	29,600	58,000	8.75	1,800	6546734
	CA*F4961*6D**+MBR2000**-1A*+TXV		56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6546736
	CA*F4961*6D**+MBR2000**-1A*+TXV		56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,800	6546739
	CA*F4961*6D**+MBR2000**-1A*+TXV		56,500	40,000	15.00	12.50	37,200	29,400	57,000	9.00	1,800	6546741
	CA*F4961*6D**+MBR2000**-1A*+TXV		56,500	40,000	15.00	12.50	37,200	29,400	57,000	9.00	1,800	6546743
	CA*F4961*6D**+TXV	G*VC950905CXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	1,750	6546745

See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0601A*	CA*F4961*6D*+TXV	G*VC950905DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6546746
	CA*F4961*6D*+TXV	G*VC950915DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546749
	CA*F4961*6D*+TXV	G*VC951155DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,800	6546750
	CA*F4961*6D*+TXV	G*VM960805CXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6546752
	CA*F4961*6D*+TXV	G*VM960805DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6546755
	CA*F4961*6D*+TXV	G*VM961005DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,800	6546756
	CA*F4961*6D*+TXV	G*VM961155DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,800	6546758
	CA*F4961*6D*+TXV	D*96VC0905CXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6547603
	CA*F4961*6D*+TXV	D*96VC0905DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6547604
	CA*F4961*6D*+TXV	D*96VC0915DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547605
	CA*F4961*6D*+TXV	D*96VC1155DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,800	6547606
	CA*F4961*6D*+TXV	D*96MCO805CXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6592179
	CA*F4961*6D*+TXV	D*96MCO805DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,750	6592180
	CA*F4961*6D*+TXV	D*96MCO805DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,800	6592181
	CA*F4961*6D*+TXV	D*96MCO805DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,800	6592182
	CAPT4961*4A*	G*VC950905CXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,785	6546760
	CAPT4961*4A*	G*VC950905DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,695	6546762
	CAPT4961*4A*	G*VC950915DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,680	6546764
	CAPT4961*4A*	G*VC951155DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,780	6546766
	CAPT4961*4A*	G*VM960805CXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,800	6546767
	CAPT4961*4A*	G*VM960805DXB*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,660	6546769
	CAPT4961*4A*	G*VM961005DXB*	56,500	40,000	13.50	11.50	37,200	29,400	57,000	8.50	33,000	1,780	6546772
	CAPT4961*4A*	G*VM961155DXB*	56,500	40,000	13.50	11.50	37,200	29,400	57,000	8.50	33,000	1,780	6546773
	CAPT4961*4A*	D*96VC0905CXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,785	6547611
	CAPT4961*4A*	D*96VC0905DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,695	6547612
	CAPT4961*4A*	D*96VC0915DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,680	6547613
	CAPT4961*4A*	D*96VC1155DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,780	6547614
	CAPT4961*4A*	D*96MCO805CXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,800	6592183
	CAPT4961*4A*	D*96MCO805DXA*	56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,660	6592184
	CAPT4961*4A*	D*96MCO805DXA*	56,500	40,000	13.50	11.50	37,200	29,400	57,000	8.50	33,000	1,780	6592185
	CAPT4961*4A*	D*96MCO805DXA*	56,500	40,000	13.50	11.50	37,200	29,400	57,000	8.50	33,000	1,780	6592186
	CAPT4961*4A*+EHP		57,000	40,500	14.00	12.00	37,600	29,600	58,000	8.50	39,000	1,700	6546775
	CAPT4961*4A*+MBR2000**_1		56,500	40,000	14.00	12.00	37,200	29,400	57,000	8.50	33,000	1,650	6546777
	CAPT4961*4A*+MBVC2000**_1A*		56,500	40,000	14.50	12.50	37,200	29,400	57,000	9.00	33,000	1,790	6546779
	CHPF4860D6D*	G*VC950905CXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546781
	CHPF4860D6D*	G*VC950905DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546783
	CHPF4860D6D*	G*VC951155DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546785
	CHPF4860D6D*	G*VM960805CXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546787
	CHPF4860D6D*	G*VM960805DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546789


See Notes on Page 38.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)			TVA RATINGS ³			HEATING CAPACITY (BTU/H)			CFM	AHRI #
			TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
DZ14SA 0601A*	CHPF4860D6D*	G*VM961005DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546791
	CHPF4860D6D*	G*VM961155DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546793
	CHPF4860D6D*	D*96VC0905CXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547619
	CHPF4860D6D*	D*96VC0905DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547620
	CHPF4860D6D*	D*96VC1155DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547621
	CHPF4860D6D*	D*96MC0805CXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592187
	CHPF4860D6D*	D*96MC0805DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592188
	CHPF4860D6D*	D*96MC1005DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592189
	CHPF4860D6D*	D*96MC1155DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592190
	CHPF4860D6D*+EEP		57,000	40,500	14.00	12.00	37,600	29,600	58,000	8.75	39,500	1,800	6546794
	CHPF4860D6D*+EEP+TXV		57,000	40,500	14.00	12.00	37,600	29,600	58,000	8.75	39,500	1,800	6546796
	CHPF4860D6D*+MBR2000**-1		57,000	40,500	14.00	12.00	37,600	29,600	57,000	8.75	38,000	1,850	6546799
	CHPF4860D6D*+MBR2000**-1+TXV		57,000	40,500	14.00	12.00	37,600	29,600	57,000	8.75	38,000	1,850	6546801
	CHPF4860D6D*+MBR2000**-1A*		57,000	40,500	14.00	12.00	37,600	29,600	57,000	8.75	38,000	1,850	6546803
	CHPF4860D6D*+MBVC2000**-1A*		56,500	40,000	15.00	12.50	37,200	29,400	57,000	9.00	33,000	1,800	6546805
	CHPF4860D6D*+MBVC2000**-1A*+TXV		56,500	40,000	15.00	12.50	37,200	29,400	57,000	9.00	33,000	1,800	6546806
	CHPF4860D6D*+TXV	G*VC950905CXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546809
	CHPF4860D6D*+TXV	G*VC950905DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546810
	CHPF4860D6D*+TXV	G*VC951155DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546813
	CHPF4860D6D*+TXV	G*VM960805CXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546815
	CHPF4860D6D*+TXV	G*VM960805DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546816
	CHPF4860D6D*+TXV	G*VM961005DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546819
	CHPF4860D6D*+TXV	G*VM961155DXB*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6546821
	CHPF4860D6D*+TXV	D*96VC0905CXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547626
	CHPF4860D6D*+TXV	D*96VC0905DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547627
	CHPF4860D6D*+TXV	D*96VC1155DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6547628
	CHPF4860D6D*+TXV	D*96MC0805CXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592191
	CHPF4860D6D*+TXV	D*96MC0805DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592192
	CHPF4860D6D*+TXV	D*96MC1005DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592193
	CHPF4860D6D*+TXV	D*96MC1155DXA*	56,500	40,000	14.00	11.50	37,200	29,400	57,000	8.50	33,000	1,750	6592194
	CSCF4860N6D*+TXV	G*VC951155DXB*	56,500	40,000	13.50	11.50	37,200	29,400	57,000	8.50	33,000	1,850	6546823
	CSCF4860N6D*+TXV	D*96VC1155DXA*	56,500	40,000	13.50	11.50	37,200	29,400	57,000	8.50	33,000	1,850	6547633
	DV60PTCD14A*		57,000	40,500	14.00	12.00	37,600	29,600	57,000	8.20	34,800	1,630	6546715

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F⁴ HSPF = Heating Seasonal Performance Factor**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

WIRING DIAGRAM

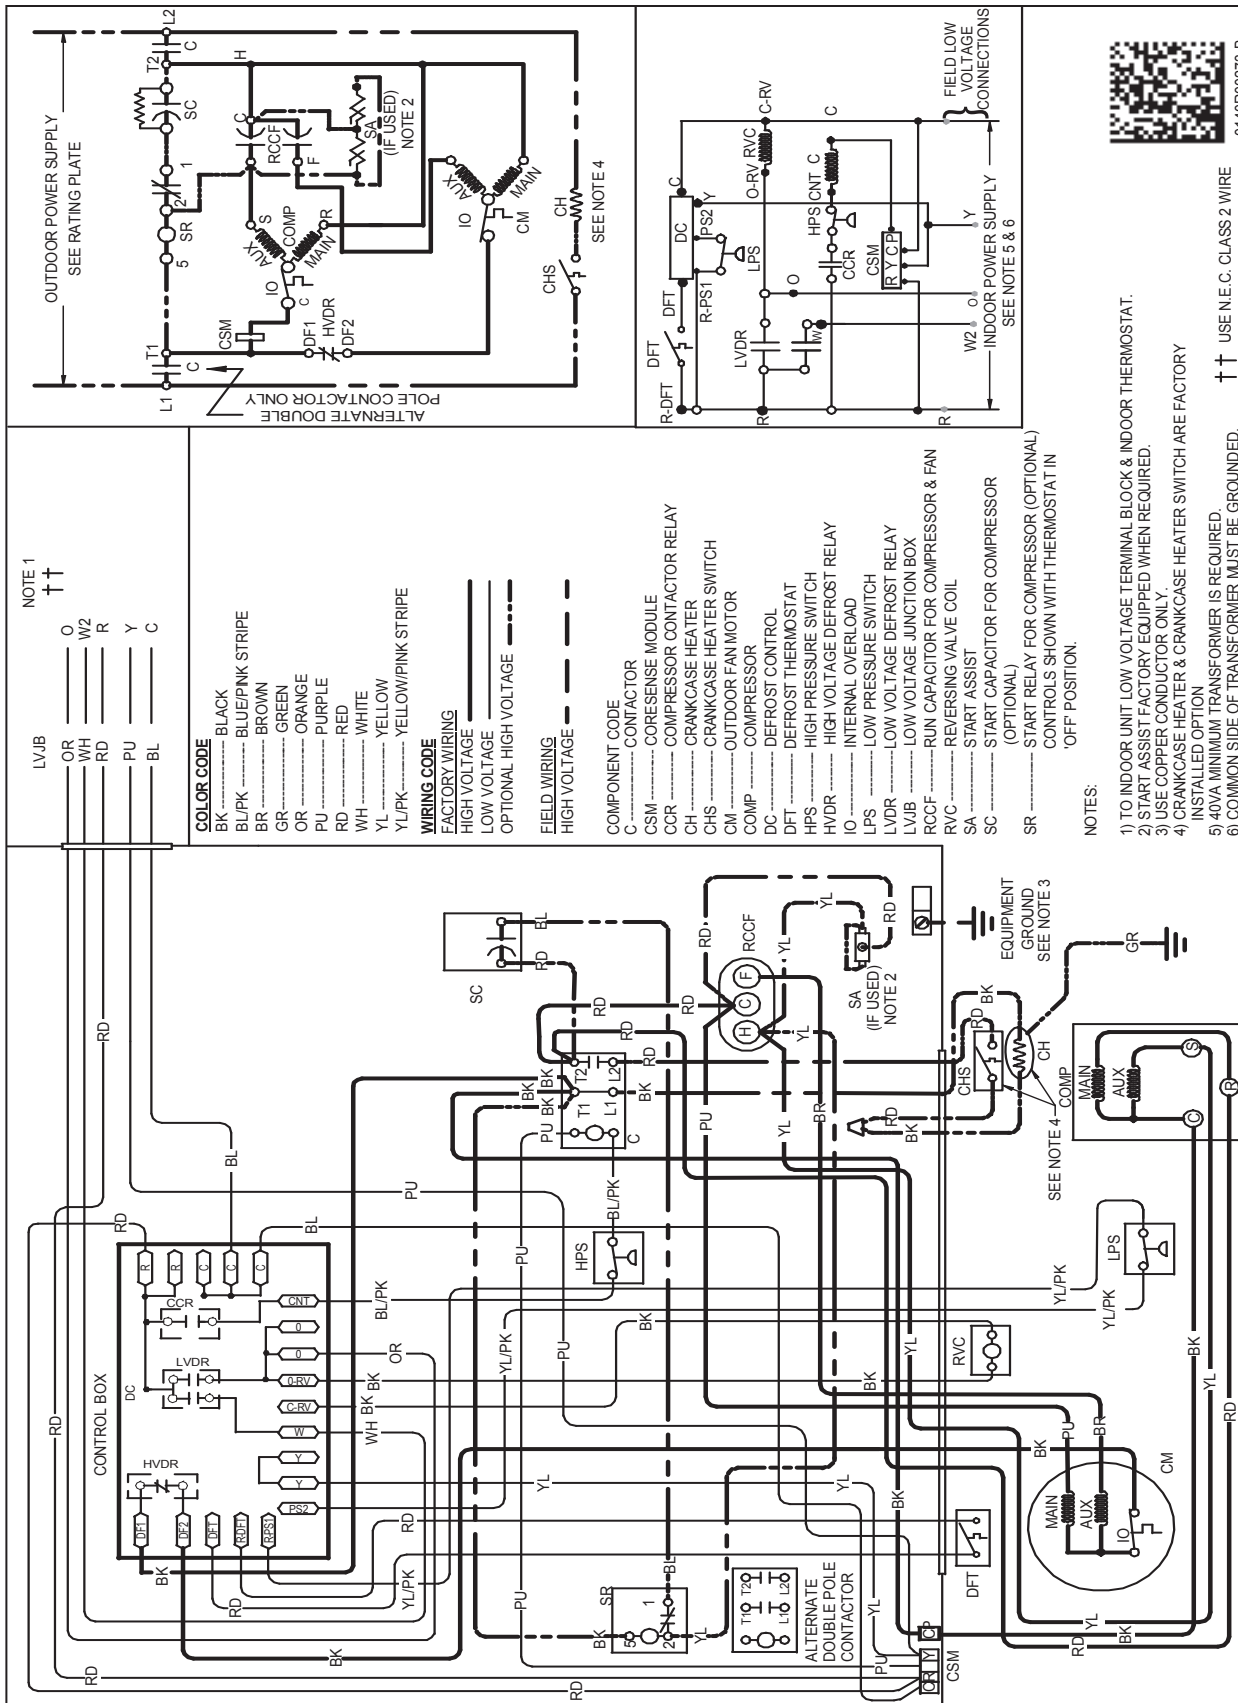


Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

DIMENSIONS

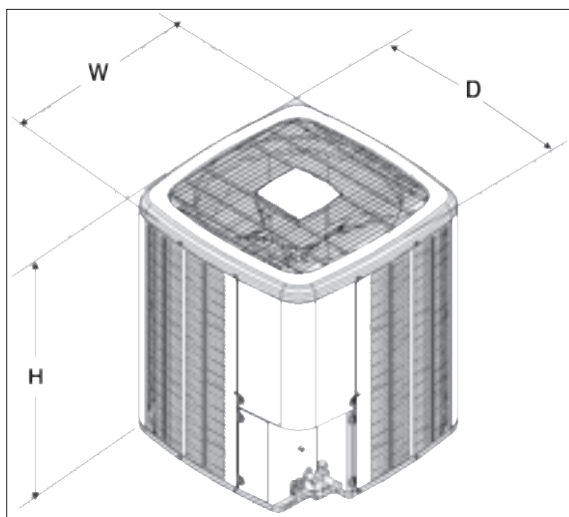

MODEL	DIMENSIONS		
	W"	D"	H"
DZ14SA0181**	29	29	34¼
DZ14SA0241**	29	29	38¼
DZ14SA0301**	29	29	38¼
DZ14SA0361**	29	29	38¼
DZ14SA0381**	35½	35½	38¼
DZ14SA0421**	35½	35½	38¼
DZ14SA0481**	35½	35½	38¼
DZ14SA0601**	35½	35½	38¼

ACCESSORIES

ITEM #	DESCRIPTION	DZ14SA 018**	DZ14SA 024**	DZ14SA 030**	DZ14SA 036**	DZ14SA 038**	DZ14SA 042**	DZ14SA 048**	DZ14SA 060**
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X	X
ASC01	Anti-Short Cycle Kit	X	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X	X
CSR-U-3	Hard-start Kit							X	X
FSK01A1	Freeze Protection Kit	X	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X	X
OT18-60A2	Outdoor Thermostat	X	X	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay Kit	X	X	X	X	X	X	X	X
TX2N4 ³	TXV Kit	X							
TX2N4A ³	TXV Kit	X	X						
TX3N4 ³	TXV Kit			X	X	X			
TX5N4 ³	TXV Kit						X	X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0 °F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.