

## SPLIT SYSTEM AIR CONDITIONER UP TO 14 SEER / 1½ TO 5 TONS

Cooling Capacity:  
17,000 - 57,000 BTU/h



### Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
AHRI Ratings.....	20
Wiring Diagrams.....	38
Dimensions.....	40
Accessories.....	40

### ■ Standard Features

- R-410A chlorine-free refrigerant
- Energy-efficient compressor
- Factory-installed filter drier
- Copper tube/aluminum fin coil
- Service valves with sweat connections and easy-access gauge ports
- AHRI Certified; ETL Listed

### ■ Cabinet Features

- Louvered sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



\* Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in California or Quebec.

# NOMENCLATURE

	D	X	13	S	N	036	3	A	A		
	1	2	3,4	5	6	7,8,9	10	11	12		
<b>Brand</b>	D - Daikin										<b>Engineering</b>
											Minor revision
<b>Type</b>	X - AC R-410A										<b>Engineering</b>
	Z - HP R-410A										Major revision
<b>SEER</b>	13 - 13 SEER		18 - 18 SEER								<b>Voltage</b>
	14 - 14 SEER		20 - 20 SEER								1 - 208/230 V Single-Phase 60 Hz
	16 - 16 SEER								2 - 220/240 V Single-Phase 50 Hz		
<b>Compressor</b>	S - Single Stage								3 - 208/230 V Three-Phase 60 Hz		
	T - Two Stage								4 - 460 V Three-Phase 60 Hz		
<b>Feature Set</b>	A - Base		D - Deluxe								5 - 380/415 V Three-Phase 50 Hz
	C - ComfortNet 4-Wire Ready		N - Nominal								<b>Tonnage Nominal</b>
											018 - 1½ tons
											024 - 2 tons
											030 - 2½ tons
											036 - 3 tons
											042 - 3½ tons
											048 - 4 tons
											060 - 5 tons
											061 - 5 tons (hi-capacity)

# SPECIFICATIONS

	DX13SN 0181A*	DX13SN 0241A*	DX13SN 0301A*	DX13SN 0361A*	DX13SN 0421A*	DX13SN 0481A*	DX13SN 0601A*	DX13SN 0611A*
<b>CAPACITIES</b>								
Nominal Cooling (BTU/h)	18,000	24,000	28,400	33,600	40,000	46,000	57,000	56,500
Decibels	75	71	73	74	75	76	77	77
<b>COMPRESSOR</b>								
RLA	9.0	13.5	12.8	14.1	17.9	19.9	25.0	26.4
LRA	48	58.3	64	77	112	109	134	134
<b>CONDENSER FAN MOTOR</b>								
Horsepower	1/8	1/6	1/8	1/4	1/4	1/4	1/4	1/4
FLA	0.7	0.9	0.7	1.5	1.5	1.5	1.5	1.5
<b>REFRIGERATION SYSTEM</b>								
Refrigerant Line Size								
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"	7/8"
Refrigerant Connection Size								
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) <sup>4 5</sup>	3/4"	3/4"	3/4"	3/4" <sup>4</sup>	7/8" <sup>5</sup>	7/8" <sup>5</sup>	7/8" <sup>5</sup>	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	70	63	62	64	83	97	100	111
Shipped with Orifice Size	0.051	0.057	0.061	0.070	0.076	0.080	0.086	0.086
<b>ELECTRICAL DATA</b>								
Voltage/ Phase (60 Hz)	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1
Minimum Circuit Ampacity <sup>2</sup>	12	17.8	16.7	19.1	23.9	26.4	32.8	34.5
Max. Overcurrent Protection <sup>3</sup>	20	30	25	30	40	45	50	60
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
<b>SHIP WEIGHT (LBS)</b>								
	145	145	134	157	206	225	209	231

<sup>1</sup> Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the SNme size as noted.

<sup>4</sup> Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

<sup>5</sup> Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

# COOLING DATA — DX13SN0181A\* / CA\*F1824\*D6\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	525	MBh	15.6	16.2	17.7	-	15.3	15.8	17.3	-	14.9	15.4	16.9	-	14.5	15.1	16.5	-	13.8	14.3	15.7	-	12.8	13.3	14.5	-	
		S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.45	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	
		Δ T	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
	650	kW	1.26	1.28	1.32	-	1.34	1.37	1.41	-	1.42	1.44	1.49	-	1.48	1.51	1.56	-	1.54	1.57	1.62	-	1.59	1.62	1.67	-	
		Amps	4.6	4.7	4.8	-	4.9	5.1	5.2	-	5.4	5.5	5.7	-	5.7	5.8	6.0	-	6.1	6.2	6.4	-	6.4	6.6	6.8	-	
		Hi PR	216	232	245	-	242	260	275	-	275	296	313	-	313	337	356	-	353	379	401	-	390	419	443	-	
	675	Lo PR	102	108	118	-	107	114	125	-	112	119	130	-	117	125	136	-	123	131	143	-	127	135	148	-	
		MBh	16.9	17.6	19.2	-	16.5	17.1	18.8	-	16.1	16.7	18.3	-	15.8	16.3	17.9	-	15.0	15.5	17.0	-	13.9	14.4	15.7	-	
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	
	75	525	Δ T	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
			kW	1.27	1.29	1.33	1.36	1.35	1.38	1.42	1.46	1.43	1.46	1.50	1.54	1.49	1.52	1.57	1.62	1.55	1.58	1.63	1.68	1.60	1.63	1.68	1.73
			Amps	4.6	4.7	4.9	5.1	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.9	7.1
650		Hi PR	218	234	247	258	244	263	278	290	278	299	316	329	317	341	360	375	356	383	405	422	393	423	447	466	
		Lo PR	103	109	119	127	109	115	126	134	113	120	131	140	118	126	138	147	124	132	144	154	128	137	149	159	
		MBh	17.2	17.7	19.2	20.6	16.8	17.3	18.7	20.1	16.4	16.9	18.3	19.6	16.0	16.5	17.9	19.2	15.2	15.7	17.0	18.2	14.1	14.5	15.7	16.9	
675		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42	
		Δ T	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
		kW	1.29	1.32	1.35	1.39	1.38	1.41	1.45	1.49	1.46	1.49	1.53	1.58	1.53	1.56	1.61	1.65	1.59	1.62	1.67	1.72	1.64	1.67	1.72	1.78	
75		Amps	4.8	4.9	5.0	5.2	5.1	5.2	5.4	5.6	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.4	6.7	6.9	6.7	6.8	7.0	7.3	
		Hi PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481	
		Lo PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164	
75	MBh	17.2	17.7	19.2	20.6	16.8	17.3	18.7	20.1	16.4	16.9	18.3	19.6	16.0	16.5	17.9	19.2	15.2	15.7	17.0	18.2	14.1	14.5	15.7	16.9		
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42		
	Δ T	20	18	15	10	20	18	15	10	20	18	15	10	20	19	15	11	20	18	15	10	19	17	14	10		
75	kW	1.29	1.32	1.35	1.39	1.38	1.41	1.45	1.49	1.46	1.49	1.53	1.58	1.53	1.56	1.61	1.65	1.59	1.62	1.67	1.72	1.64	1.67	1.72	1.78		
	Amps	4.8	4.9	5.0	5.2	5.1	5.2	5.4	5.6	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.4	6.7	6.9	6.7	6.8	7.0	7.3		
	Hi PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481		
75	Lo PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164		
	MBh	17.2	17.7	19.2	20.6	16.8	17.3	18.7	20.1	16.4	16.9	18.3	19.6	16.0	16.5	17.9	19.2	15.2	15.7	17.0	18.2	14.1	14.5	15.7	16.9		
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42		
75	Δ T	20	18	15	10	20	18	15	10	20	18	15	10	20	19	15	11	20	18	15	10	19	17	14	10		
	kW	1.29	1.32	1.35	1.39	1.38	1.41	1.45	1.49	1.46	1.49	1.53	1.58	1.53	1.56	1.61	1.65	1.59	1.62	1.67	1.72	1.64	1.67	1.72	1.78		
	Amps	4.8	4.9	5.0	5.2	5.1	5.2	5.4	5.6	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.4	6.7	6.9	6.7	6.8	7.0	7.3		
75	Hi PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481		
	Lo PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164		
	MBh	17.2	17.7	19.2	20.6	16.8	17.3	18.7	20.1	16.4	16.9	18.3	19.6	16.0	16.5	17.9	19.2	15.2	15.7	17.0	18.2	14.1	14.5	15.7	16.9		

Shaded area reflects ACCA (TVA) conditions  
 IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

COOLING DATA — DX13SN0181A\* / CA\*F1824\*D6\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	16.2	16.5	17.7	18.9	15.8	16.1	17.3	18.4	15.4	15.8	16.8	18.0	15.0	15.4	16.4	17.6	14.3	14.6	15.6	16.7	13.2	13.5	14.5	15.5
	S/T	0.89	0.84	0.68	0.5	0.92	0.87	0.71	0.53	0.95	0.89	0.72	0.5	0.98	0.92	0.75	0.56	1.02	0.95	0.78	0.6	1.02	0.96	0.78	0.58
	Δ T	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	25	24	21	17	24	23	20	16
	kW	1.27	1.30	1.33	1.4	1.36	1.39	1.43	1.47	1.44	1.47	1.51	1.6	1.51	1.54	1.58	1.63	1.56	1.59	1.64	1.7	1.61	1.65	1.70	1.75
	Amps	4.7	4.8	4.9	5.1	5.0	5.2	5.3	5.5	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.5	6.8	6.5	6.7	6.9	7.2
	Hi PR	220	237	250	260.7	247	266	281	293	281	302	319	332.8	320	344	363	379	360	387	409	426.4	397	428	452	471
	Lo PR	104	110	121	128.3	110	117	127	136	114	121	132	140.9	120	127	139	148	125	133	146	155.1	130	138	151	160
	MBh	17.5	17.9	19.1	20.5	17.1	17.5	18.7	20.0	16.7	17.1	18.2	19.5	16.3	16.7	17.8	19.0	15.5	15.8	16.9	18.1	14.3	14.7	15.7	16.7
	S/T	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.55	0.98	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	0.99	0.80	0.6	1.00	1.00	0.81	0.61
	Δ T	23	22	19	15	23	22	19	15	23	22	19	15	23	22	20	16	22	22	19	15	20	21	18	14
kW	1.30	1.33	1.36	1.4	1.39	1.42	1.46	1.50	1.47	1.50	1.54	1.6	1.54	1.57	1.62	1.67	1.60	1.63	1.68	1.7	1.65	1.68	1.74	1.79	
Amps	4.8	4.9	5.1	5.2	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	6.0	6.1	6.3	6.6	6.4	6.5	6.7	7.0	6.7	6.9	7.1	7.4	
Hi PR	227	244	258	268.8	254	274	289	302	289	311	329	343.0	330	355	375	391	371	399	421	439.5	410	441	466	486	
Lo PR	107	114	124	132.3	113	120	131	140	117	125	136	145.3	123	131	143	153	129	138	150	159.9	134	142	155	165	
MBh	17.5	17.9	19.1	20.5	17.1	17.5	18.7	20.0	16.7	17.1	18.2	19.5	16.3	16.7	17.8	19.0	15.5	15.8	16.9	18.1	14.3	14.7	15.7	16.7	
S/T	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.55	0.98	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	0.99	0.80	0.6	1.00	1.00	0.81	0.61	
Δ T	22	21	18	15	22	21	19	15	22	21	19	15	22	22	19	15	21	21	19	15	20	20	17	14	
kW	1.30	1.33	1.36	1.4	1.39	1.42	1.46	1.50	1.47	1.50	1.54	1.6	1.54	1.57	1.62	1.67	1.60	1.63	1.68	1.7	1.65	1.68	1.74	1.79	
Amps	4.8	4.9	5.1	5.2	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	6.0	6.1	6.3	6.6	6.4	6.5	6.7	7.0	6.7	6.9	7.1	7.4	
Hi PR	227	244	258	268.8	254	274	289	302	289	311	329	343.0	330	355	375	391	371	399	421	439.5	410	441	466	486	
Lo PR	107	114	124	132.3	113	120	131	140	117	125	136	145.3	123	131	143	153	129	138	150	159.9	134	142	155	165	

85	MBh	16.5	16.8	17.6	18.7	16.1	16.4	17.2	18.3	15.7	16.0	16.8	17.9	15.3	15.6	16.3	17.4	14.5	14.8	15.5	16.6	13.5	13.7	14.4	15.3
	S/T	0.94	0.90	0.81	0.66	0.97	0.94	0.84	0.69	0.99	0.96	0.87	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76
	Δ T	27	27	25	22	27	27	25	22	27	27	25	22	27	27	26	22	25	26	25	22	24	24	24	20
	kW	1.28	1.31	1.34	1.38	1.37	1.40	1.44	1.48	1.45	1.48	1.52	1.57	1.52	1.55	1.59	1.64	1.57	1.61	1.65	1.71	1.62	1.66	1.71	1.76
	Amps	4.7	4.8	5.0	5.1	5.1	5.2	5.4	5.6	5.5	5.6	5.8	6.0	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.6	6.8	7.0	7.2
	Hi PR	222	239	252	263	249	268	283	296	284	305	322	336	323	348	367	383	363	391	413	431	401	432	456	476
	Lo PR	105	111	122	130	111	118	129	137	115	122	134	142	121	129	140	150	127	135	147	157	131	139	152	162
	MBh	17.8	18.2	19.0	20.3	17.4	17.8	18.6	19.8	17.0	17.3	18.2	19.4	16.6	16.9	17.7	18.9	15.8	16.1	16.8	18.0	14.6	14.9	15.6	16.6
	S/T	0.97	0.94	0.84	0.69	1.00	0.97	0.88	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	Δ T	24	24	23	20	25	24	23	20	24	24	23	20	23	24	23	20	22	23	23	20	21	21	21	19
kW	1.31	1.34	1.37	1.41	1.40	1.43	1.47	1.51	1.48	1.51	1.56	1.60	1.55	1.58	1.63	1.68	1.61	1.64	1.69	1.75	1.66	1.70	1.75	1.80	
Amps	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.6	6.8	7.0	6.8	6.9	7.2	7.4	
Hi PR	229	247	260	271	257	277	292	305	292	315	332	346	333	358	378	395	375	403	426	444	414	445	470	491	
Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
MBh	17.8	18.2	19.0	20.3	17.4	17.8	18.6	19.8	17.0	17.3	18.2	19.4	16.6	16.9	17.7	18.9	15.8	16.1	16.8	18.0	14.6	14.9	15.6	16.6	
S/T	0.97	0.94	0.84	0.69	1.00	0.97	0.88	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79	
Δ T	24	23	22	19	24	23	22	19	23	23	22	19	23	23	22	19	21	22	22	19	20	20	21	18	
kW	1.31	1.34	1.37	1.41	1.40	1.43	1.47	1.51	1.48	1.51	1.56	1.60	1.55	1.58	1.63	1.68	1.61	1.64	1.69	1.75	1.66	1.70	1.75	1.80	
Amps	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.6	6.8	7.0	6.8	6.9	7.2	7.4	
Hi PR	229	247	260	271	257	277	292	305	292	315	332	346	333	358	378	395	375	403	426	444	414	445	470	491	
Lo PR	108	115	125	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	

Amps = outdoor unit amps (comp.+fan)  
kW = Total system power

Shaded area reflects AHRI conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

# COOLING DATA — DX13SN0241A\* / CA\*F3030\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	700	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.3	20.0	21.9	-	18.8	19.5	21.3	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-	
		S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-	
		Δ T	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
	800	kW	1.61	1.64	1.69	-	1.72	1.75	1.81	-	1.82	1.86	1.91	-	1.91	1.95	2.01	-	1.98	2.03	2.09	-	2.05	2.09	2.16	-	
		Amps	5.9	6.1	6.3	-	6.4	6.5	6.8	-	6.9	7.1	7.3	-	7.4	7.6	7.9	-	7.9	8.1	8.4	-	8.4	8.6	8.9	-	
		Hi PR	222	239	252	-	249	268	283	-	283	305	322	-	323	347	367	-	363	391	412	-	401	432	456	-	
	900	Lo PR	101	108	117	-	107	114	124	-	111	118	129	-	117	124	135	-	122	130	142	-	126	134	147	-	
		MBh	21.9	22.7	24.8	-	21.4	22.2	24.3	-	20.9	21.6	23.7	-	20.4	21.1	23.1	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-	
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.81	0.68	0.47	-	
	75	700	Δ T	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
			kW	1.64	1.67	1.72	-	1.76	1.80	1.85	-	1.86	1.90	1.96	-	1.96	2.00	2.06	-	2.03	2.08	2.14	-	2.10	2.14	2.21	-
			Amps	6.1	6.2	6.4	-	6.6	6.7	7.0	-	7.1	7.3	7.6	-	7.6	7.8	8.1	-	8.1	8.3	8.6	-	8.6	8.8	9.1	-
800		Hi PR	229	246	260	-	257	276	292	-	292	314	332	-	333	358	378	-	374	403	425	-	413	445	470	-	
		Lo PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-	
		MBh	22.5	23.4	25.6	-	22.0	22.8	25.0	-	21.5	22.3	24.4	-	21.0	21.7	23.8	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-	
900		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
		Δ T	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	11	-	
		kW	1.65	1.69	1.74	-	1.77	1.81	1.86	-	1.88	1.92	1.98	-	1.97	2.01	2.07	-	2.05	2.09	2.16	-	2.12	2.16	2.23	-	
700		Amps	6.1	6.3	6.5	-	6.6	6.8	7.0	-	7.2	7.4	7.6	-	7.7	7.9	8.2	-	8.2	8.4	8.7	-	8.7	8.9	9.2	-	
		Hi PR	231	249	263	-	259	279	295	-	295	317	335	-	336	362	382	-	378	407	429	-	418	449	475	-	
		Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	121	129	141	-	127	135	148	-	132	140	153	-	
75	700	MBh	20.5	21.1	22.9	24.6	20.1	20.7	22.4	24.2	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	16.8	17.3	18.7	20.1	
		S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.89	0.79	0.60	0.39	
		Δ T	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10	
	800	kW	1.62	1.65	1.70	1.75	1.73	1.77	1.82	1.88	1.83	1.87	1.93	1.99	1.92	1.96	2.02	2.09	2.00	2.04	2.11	2.17	2.07	2.11	2.18	2.25	
		Amps	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.8	8.4	8.7	8.9	9.3	
		Hi PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480	
	900	Lo PR	102	109	119	126	108	115	125	133	112	119	130	139	118	125	137	146	123	131	143	153	128	136	148	158	
		MBh	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	18.2	18.8	20.3	21.8	
		S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.82	0.62	0.40	
	700	Δ T	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
		kW	1.65	1.69	1.74	1.79	1.77	1.81	1.86	1.92	1.88	1.92	1.98	2.04	1.97	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.12	2.16	2.23	2.30	
		Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.2	7.4	7.6	7.9	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6	
800	Hi PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495		
	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163		
	MBh	22.9	23.6	25.5	27.4	22.4	23.0	24.9	26.8	21.9	22.5	24.4	26.1	21.3	22.0	23.8	25.5	20.3	20.9	22.6	24.2	18.8	19.3	20.9	22.4		
900	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42		
	Δ T	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10		
	kW	1.67	1.70	1.75	1.80	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.05	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.25	2.13	2.18	2.25	2.32		
700	Amps	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.6		
	Hi PR	233	251	265	277	262	282	298	311	298	321	339	353	339	365	386	402	382	411	434	453	422	454	479	500		
	Lo PR	106	113	123	131	112	119	130	139	117	124	136	144	123	130	142	152	128	137	149	159	133	141	154	164		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

COOLING DATA — DX13SN0241A\* / CA\*F3030\*6D\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	20.9	21.4	22.8	24.4	20.4	20.9	22.3	23.8	19.9	20.4	21.8	23.3	19.4	19.9	21.2	22.7	18.5	18.9	20.2	21.6	17.1	17.5	18.7	20.0
	S/T	0.85	0.79	0.65	0.5	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.5	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.6	0.97	0.91	0.74	0.56
	ΔT	23	22	19	15	24	23	20	16	24	23	20	16	24	23	20	16	23	22	20	16	22	21	18	15
	kW	1.63	1.66	1.71	1.8	1.75	1.78	1.83	1.89	1.85	1.89	1.94	2.0	1.94	1.98	2.04	2.11	2.02	2.06	2.12	2.2	2.08	2.13	2.19	2.26
	Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.1	7.2	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.4
	Hi PR	227	244	257	268.5	254	274	289	301	289	311	328	342.6	329	354	374	390	370	399	421	439.0	409	440	465	485
	Lo PR	103	110	120	127.5	109	116	127	135	113	120	131	140.0	119	127	138	147	125	133	145	154.2	129	137	150	159
	MBh	22.6	23.1	24.7	26.4	22.1	22.6	24.2	25.8	21.6	22.1	23.6	25.2	21.1	21.5	23.0	24.6	20.0	20.5	21.9	23.4	18.5	18.9	20.2	21.6
	S/T	0.88	0.82	0.67	0.5	0.91	0.85	0.70	0.52	0.93	0.88	0.71	0.5	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.6	1.00	0.95	0.77	0.58
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	21	18	14
kW	1.67	1.70	1.75	1.8	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.1	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.2	2.13	2.18	2.25	2.32	
Amps	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.3	7.3	7.5	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	
Hi PR	234	251	265	276.8	262	282	298	311	298	321	339	353.2	339	365	386	402	382	411	434	452.6	422	454	479	500	
Lo PR	106	113	123	131.5	112	119	130	139	117	124	136	144.4	123	130	142	152	128	137	149	158.9	133	141	154	164	
MBh	23.3	23.8	25.5	27.2	22.8	23.3	24.9	26.6	22.2	22.7	24.3	26.0	21.7	22.2	23.7	25.3	20.6	21.1	22.5	24.1	19.1	19.5	20.8	22.3	
S/T	0.92	0.86	0.70	0.5	0.96	0.90	0.73	0.54	1.00	0.92	0.75	0.6	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60	
ΔT	22	21	18	15	22	21	19	15	23	21	19	15	22	21	19	15	21	22	18	15	20	20	17	14	
kW	1.68	1.71	1.76	1.8	1.80	1.84	1.89	1.95	1.91	1.95	2.01	2.1	2.00	2.04	2.11	2.17	2.08	2.13	2.19	2.3	2.15	2.20	2.27	2.34	
Amps	6.2	6.4	6.6	6.9	6.8	6.9	7.1	7.4	7.3	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.4	8.6	8.8	9.2	8.9	9.1	9.4	9.7	
Hi PR	236	254	268	279.5	265	285	301	314	301	324	342	356.7	343	369	390	406	386	415	438	457.1	426	459	484	505	
Lo PR	107	114	125	132.8	113	121	132	140	118	125	137	145.8	124	132	144	153	130	138	151	160.5	134	143	156	166	
700	MBh	21.3	21.7	22.7	24.2	20.8	21.2	22.2	23.7	20.3	20.7	21.7	23.1	19.8	20.2	21.1	22.5	18.8	19.2	20.1	21.4	17.4	17.7	18.6	19.8
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	0.98	0.89	0.72
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	25	25	23	20	23	23	22	19
	kW	1.64	1.67	1.72	1.78	1.76	1.79	1.85	1.91	1.86	1.90	1.96	2.02	1.95	2.00	2.06	2.12	2.03	2.08	2.14	2.21	2.10	2.14	2.21	2.28
	Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.6	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5
	Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	443	413	445	470	490
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	140	149	126	134	146	156	130	139	151	161
	MBh	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	22.0	22.4	23.5	25.0	21.4	21.9	22.9	24.4	20.4	20.8	21.7	23.2	18.9	19.2	20.1	21.5
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75
	ΔT	24	24	23	20	25	24	23	20	25	24	23	20	25	24	23	20	23	24	23	20	22	22	21	18
kW	1.68	1.71	1.76	1.82	1.80	1.84	1.89	1.95	1.91	1.95	2.01	2.07	2.00	2.04	2.11	2.17	2.08	2.13	2.19	2.26	2.15	2.20	2.27	2.34	
Amps	6.2	6.4	6.6	6.9	6.8	6.9	7.1	7.4	7.3	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.4	8.6	8.8	9.2	8.9	9.1	9.4	9.7	
Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	406	386	415	438	457	426	459	484	505	
Lo PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166	
MBh	23.7	24.2	25.3	27.0	23.2	23.6	24.8	26.4	22.6	23.1	24.2	25.8	22.1	22.5	23.6	25.1	21.0	21.4	22.4	23.9	19.4	19.8	20.7	22.1	
S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78	
ΔT	23	23	22	19	24	23	22	19	23	23	22	19	23	23	22	19	21	22	22	19	20	20	20	18	
kW	1.69	1.73	1.78	1.83	1.81	1.85	1.91	1.97	1.92	1.96	2.02	2.09	2.02	2.06	2.12	2.19	2.10	2.14	2.21	2.28	2.17	2.21	2.29	2.36	
Amps	6.3	6.5	6.7	6.9	6.8	7.0	7.2	7.5	7.4	7.6	7.8	8.1	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3	8.9	9.2	9.5	9.8	
Hi PR	238	256	271	282	267	288	304	317	304	327	345	360	346	373	393	410	390	419	443	462	430	463	489	510	
Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	139	152	162	136	144	157	168	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power



# COOLING DATA — DX13SN0301A\* / CA\*F3030\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	875	MBh	24.9	25.8	28.3	-	24.4	25.2	27.7	-	23.8	24.6	27.0	-	23.2	24.0	26.3	-	22.0	22.8	25.0	-	20.4	21.2	23.2	-	
		S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-	
		Δ T	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
	1050	kW	1.97	2.01	2.07	-	2.12	2.16	2.23	-	2.24	2.29	2.36	-	2.35	2.40	2.48	-	2.45	2.50	2.58	-	2.53	2.58	2.67	-	
		Amps	7.2	7.4	7.7	-	7.8	8.0	8.3	-	8.5	8.7	9.0	-	9.1	9.4	9.7	-	9.7	10.0	10.3	-	10.3	10.6	10.9	-	
		Hi PR	245	264	279	-	275	296	313	-	313	337	356	-	356	384	405	-	401	432	456	-	443	477	503	-	
	1125	Lo PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-	
		MBh	27.0	28.0	30.7	-	26.4	27.4	30.0	-	25.8	26.7	29.3	-	25.1	26.1	28.5	-	23.9	24.7	27.1	-	22.1	22.9	25.1	-	
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
	75	875	Δ T	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-
			kW	2.02	2.06	2.12	-	2.17	2.21	2.28	-	2.30	2.35	2.42	-	2.41	2.46	2.54	-	2.51	2.56	2.64	-	2.59	2.65	2.73	-
			Amps	7.4	7.6	7.9	-	8.1	8.3	8.5	-	8.8	9.0	9.3	-	9.4	9.6	10.0	-	10.0	10.3	10.6	-	10.6	10.9	11.3	-
1050		Hi PR	253	272	287	-	284	305	322	-	323	347	367	-	367	395	418	-	413	445	470	-	457	492	519	-	
		Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	
		MBh	27.3	28.3	31.0	-	26.7	27.6	30.3	-	26.0	27.0	29.5	-	25.4	26.3	28.8	-	24.1	25.0	27.4	-	22.3	23.2	25.4	-	
1125		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.83	0.70	0.48	-	
		Δ T	16	14	11	-	16	14	11	-	16	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-	
		kW	2.02	2.07	2.13	-	2.17	2.22	2.28	-	2.30	2.35	2.42	-	2.42	2.47	2.55	-	2.52	2.57	2.65	-	2.60	2.66	2.74	-	
75		875	Amps	7.5	7.7	7.9	-	8.1	8.3	8.6	-	8.8	9.0	9.3	-	9.4	9.7	10.0	-	10.0	10.3	10.6	-	10.6	10.9	11.3	-
			Hi PR	254	273	288	-	285	306	323	-	324	348	368	-	369	397	419	-	415	446	471	-	458	493	521	-
			Lo PR	108	115	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	139	151	-	135	143	157	-
	1050	MBh	25.4	26.1	28.3	30.3	24.8	25.5	27.6	29.6	24.2	24.9	26.9	28.9	23.6	24.3	26.3	28.2	22.4	23.1	25.0	27.4	20.8	21.4	23.1	24.8	
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39	
		Δ T	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10	
	1125	kW	1.99	2.03	2.09	2.15	2.13	2.18	2.24	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.50	2.58	2.47	2.52	2.60	2.69	2.55	2.61	2.69	2.78	
		Amps	7.3	7.5	7.7	8.0	7.9	8.1	8.4	8.7	8.6	8.8	9.1	9.5	9.2	9.4	9.8	10.1	9.8	10.1	10.4	10.8	10.4	10.7	11.0	11.5	
		Hi PR	248	267	282	294	278	299	316	329	316	340	359	375	360	387	409	427	405	436	460	480	448	482	509	530	
	75	1050	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163
			MBh	27.5	28.3	30.6	32.9	26.8	27.6	29.9	32.1	26.2	27.0	29.2	31.3	25.6	26.3	28.5	30.6	24.3	25.0	27.1	29.0	22.5	23.2	25.1	26.9
			S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.41
1125		Δ T	19	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10	
		kW	2.04	2.08	2.14	2.20	2.18	2.23	2.30	2.37	2.32	2.36	2.44	2.51	2.43	2.48	2.56	2.64	2.53	2.58	2.67	2.75	2.61	2.67	2.76	2.85	
		Amps	7.5	7.7	8.0	8.3	8.1	8.3	8.6	9.0	8.9	9.1	9.4	9.7	9.5	9.7	10.1	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.4	11.8	
1125		Hi PR	255	275	290	303	287	308	326	340	326	351	370	386	371	399	422	440	418	449	475	495	461	497	524	547	
		Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
		MBh	27.8	28.6	30.9	33.2	27.1	27.9	30.2	32.4	26.5	27.2	29.5	31.6	25.8	26.6	28.8	30.9	24.5	25.3	27.3	29.3	22.7	23.4	25.3	27.2	
75		1125	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.61	0.39	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
			Δ T	19	17	14	10	19	17	14	10	19	17	14	10	19	18	14	10	19	17	14	10	18	16	13	9
			kW	2.04	2.08	2.14	2.21	2.19	2.23	2.30	2.37	2.32	2.37	2.44	2.52	2.44	2.49	2.57	2.65	2.54	2.59	2.67	2.76	2.62	2.68	2.76	2.85
	1125	Amps	7.5	7.7	8.0	8.3	8.2	8.4	8.6	9.0	8.9	9.1	9.4	9.8	9.5	9.7	10.1	10.5	10.1	10.4	10.7	11.2	10.7	11.0	11.4	11.8	
		Hi PR	256	276	291	304	287	309	327	341	327	352	371	387	372	401	423	441	419	451	476	496	463	498	526	549	
		Lo PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power



COOLING DATA — DX13SN0301A\* / CA\*F3030\*6D\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	875	MBh	25.8	26.4	28.2	30.1	25.2	25.8	27.5	29.4	24.6	25.1	26.9	28.7	24.0	24.5	26.2	28.0	22.8	23.3	24.9	26.6	21.1	21.6	23.1	24.7	
		S/T	0.86	0.80	0.65	0.5	0.89	0.83	0.68	0.51	0.91	0.85	0.70	0.5	0.94	0.88	0.72	0.54	0.98	0.91	0.74	0.6	0.98	0.92	0.75	0.56	
	1050	ΔT	23	22	19	15	24	23	20	16	24	23	20	16	24	23	20	16	23	22	19	16	22	21	18	15	
		kW	2.00	2.04	2.11	2.2	2.15	2.19	2.26	2.33	2.28	2.33	2.40	2.5	2.39	2.44	2.52	2.60	2.49	2.54	2.62	2.7	2.57	2.63	2.71	2.80	
	1125	Amps	7.4	7.6	7.8	8.1	8.0	8.2	8.5	8.8	8.7	8.9	9.2	9.6	9.3	9.5	9.9	10.2	9.9	10.2	10.5	10.9	10.5	10.8	11.1	11.6	
		Hi PR	250	269	284	296.6	281	302	319	333	319	344	363	378.5	364	391	413	431	409	440	465	485.0	452	487	514	536	
	85	875	Lo PR	106	113	124	131.6	112	120	131	139	117	124	136	144.5	123	131	142	152	129	137	149	159.0	133	141	154	165
			MBh	28.0	28.6	30.5	32.6	27.3	27.9	29.8	31.9	26.7	27.2	29.1	31.1	26.0	26.6	28.4	30.4	24.7	25.3	27.0	28.8	22.9	23.4	25.0	26.7
		1050	S/T	0.89	0.83	0.68	0.5	0.92	0.86	0.70	0.53	0.94	0.89	0.72	0.5	0.97	0.91	0.74	0.56	1.00	0.95	0.77	0.6	1.00	0.96	0.78	0.58
			ΔT	22	21	18	14	22	21	18	15	22	21	18	15	22	21	19	15	22	21	18	15	20	20	17	14
		1125	kW	2.05	2.09	2.16	2.2	2.20	2.25	2.32	2.39	2.33	2.38	2.46	2.5	2.45	2.50	2.58	2.67	2.55	2.60	2.69	2.8	2.64	2.69	2.78	2.87
			Amps	7.6	7.8	8.0	8.3	8.2	8.4	8.7	9.0	8.9	9.2	9.5	9.8	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.8	11.1	11.5	11.9
875		Hi PR	258	278	293	305.8	289	312	329	343	329	354	374	390.2	375	404	426	444	422	454	479	500.0	466	502	530	552	
		Lo PR	110	117	127	135.6	116	123	135	143	120	128	140	148.9	126	135	147	156	133	141	154	164.0	137	146	159	170	
1050		MBh	28.2	28.9	30.8	33.0	27.6	28.2	30.1	32.2	26.9	27.5	29.4	31.4	26.3	26.8	28.7	30.7	25.0	25.5	27.2	29.1	23.1	23.6	25.2	27.0	
		S/T	0.91	0.85	0.69	0.5	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.5	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.6	1.00	0.98	0.79	0.59	
1125		ΔT	21	20	17	14	21	20	18	14	21	20	18	14	21	20	18	14	20	20	18	14	19	19	16	13	
		kW	2.06	2.10	2.16	2.2	2.21	2.25	2.32	2.39	2.34	2.39	2.46	2.5	2.46	2.51	2.59	2.67	2.56	2.61	2.69	2.8	2.64	2.70	2.79	2.88	
875	Amps	7.6	7.8	8.1	8.4	8.2	8.4	8.7	9.1	9.0	9.2	9.5	9.9	9.6	9.8	10.2	10.6	10.2	10.5	10.8	11.3	10.9	11.1	11.5	12.0		
	Hi PR	259	278	294	306.7	290	312	330	344	330	355	375	391.4	376	405	427	446	423	455	481	501.5	467	503	531	554		
1050	Lo PR	110	117	128	136.0	116	124	135	144	121	128	140	149.4	127	135	147	157	133	141	154	164.4	138	146	160	170		
	MBh	26.3	26.8	28.0	29.9	25.7	26.1	27.4	29.2	25.0	25.5	26.7	28.5	24.4	24.9	26.1	27.8	23.2	23.7	24.8	26.4	21.5	21.9	23.0	24.5		
875	S/T	0.90	0.87	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	0.99	0.90	0.73		
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	24	25	23	20	23	23	22	19		
1050	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.35	2.30	2.34	2.42	2.49	2.41	2.46	2.54	2.62	2.51	2.56	2.64	2.73	2.59	2.65	2.73	2.82		
	Amps	7.4	7.6	7.9	8.2	8.1	8.3	8.5	8.9	8.8	9.0	9.3	9.7	9.4	9.6	10.0	10.3	10.0	10.3	10.6	11.0	10.6	10.9	11.3	11.7		
875	Hi PR	253	272	287	300	284	305	322	336	323	347	367	382	367	395	417	435	413	445	470	490	457	491	519	541		
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166		
1050	MBh	28.5	29.0	30.4	32.4	27.8	28.3	29.7	31.7	27.1	27.7	29.0	30.9	26.5	27.0	28.3	30.1	25.1	25.6	26.8	28.6	23.3	23.7	24.9	26.5		
	S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76		
875	ΔT	23	23	22	19	23	23	22	19	24	23	22	19	23	23	22	19	22	22	22	19	20	21	20	18		
	kW	2.07	2.11	2.17	2.24	2.22	2.26	2.33	2.41	2.35	2.40	2.48	2.56	2.47	2.52	2.60	2.69	2.57	2.63	2.71	2.80	2.66	2.71	2.80	2.89		
1050	Amps	7.7	7.8	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.3	9.6	9.9	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	10.9	11.2	11.6	12.0		
	Hi PR	261	280	296	309	292	315	332	347	333	358	378	394	379	408	430	449	426	458	484	505	471	507	535	558		
1125	Lo PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	166	138	147	161	171		
	MBh	28.7	29.3	30.7	32.7	28.1	28.6	30.0	32.0	27.4	27.9	29.3	31.2	26.7	27.3	28.5	30.4	25.4	25.9	27.1	28.9	23.5	24.0	25.1	26.8		
875	S/T	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.70	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77		
	ΔT	22	22	21	18	23	22	21	18	22	22	21	18	22	22	21	18	21	21	21	18	19	20	19	17		
1050	kW	2.07	2.11	2.18	2.24	2.22	2.27	2.34	2.41	2.36	2.41	2.48	2.56	2.48	2.53	2.61	2.69	2.58	2.63	2.72	2.80	2.66	2.72	2.81	2.90		
	Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.1	9.3	9.6	10.0	9.7	9.9	10.3	10.7	10.3	10.6	10.9	11.4	11.0	11.2	11.6	12.1		
1125	Hi PR	261	281	297	310	293	316	333	348	334	359	379	395	380	409	432	450	427	460	486	506	472	508	537	560		
	Lo PR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

# COOLING DATA — DX13SN0361A\* / CA\*F3636\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1050	MBh	29.5	30.6	33.5	-	28.8	29.9	32.7	-	28.1	29.2	31.9	-	27.4	28.4	31.2	-	26.1	27.0	29.6	-	24.2	25.0	27.4	-
	S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-
	Δ T	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-
	kW	2.32	2.37	2.44	-	2.49	2.55	2.63	-	2.65	2.70	2.79	-	2.78	2.84	2.93	-	2.89	2.96	3.05	-	2.99	3.06	3.16	-
	Amps	8.5	8.7	9.0	-	9.2	9.5	9.8	-	10.1	10.3	10.7	-	10.8	11.1	11.4	-	11.5	11.8	12.2	-	12.2	12.5	13.0	-
	Hi PR	235	252	267	-	263	283	299	-	299	322	340	-	341	367	387	-	384	413	436	-	424	456	482	-
Lo PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	146	-	
1200	MBh	32.0	33.1	36.3	-	31.2	32.4	35.5	-	30.5	31.6	34.6	-	29.7	30.8	33.8	-	28.2	29.3	32.1	-	26.2	27.1	29.7	-
	S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.81	0.68	0.47	-
	Δ T	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
	kW	2.38	2.43	2.50	-	2.56	2.61	2.69	-	2.71	2.77	2.86	-	2.85	2.91	3.00	-	2.97	3.03	3.13	-	3.07	3.14	3.24	-
	Amps	8.8	9.0	9.3	-	9.5	9.7	10.1	-	10.4	10.6	11.0	-	11.1	11.4	11.8	-	11.8	12.1	12.6	-	12.6	12.9	13.3	-
	Hi PR	242	260	275	-	271	292	308	-	309	332	351	-	352	378	399	-	395	426	449	-	437	470	497	-
Lo PR	104	111	121	-	110	117	128	-	114	121	133	-	120	128	139	-	126	134	146	-	130	138	151	-	
1350	MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.7	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	27.0	27.9	30.6	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	Δ T	17	14	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	14	11	-	16	13	10	-
	kW	2.40	2.45	2.52	-	2.58	2.63	2.71	-	2.73	2.79	2.88	-	2.87	2.93	3.03	-	2.99	3.06	3.16	-	3.09	3.16	3.26	-
	Amps	8.8	9.1	9.4	-	9.6	9.8	10.2	-	10.5	10.7	11.1	-	11.2	11.5	11.9	-	12.0	12.3	12.7	-	12.7	13.0	13.5	-
	Hi PR	244	263	278	-	274	295	311	-	312	335	354	-	355	382	403	-	399	430	454	-	441	475	501	-
Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-	
1050	MBh	30.0	30.9	33.4	35.9	29.3	30.2	32.7	35.1	28.6	29.5	31.9	34.2	27.9	28.7	31.1	33.4	26.5	27.3	29.6	31.7	24.6	25.3	27.4	29.4
	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.73	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39
	Δ T	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10
	kW	2.34	2.39	2.46	2.54	2.51	2.57	2.65	2.73	2.67	2.72	2.81	2.90	2.80	2.86	2.96	3.05	2.92	2.98	3.08	3.18	3.02	3.08	3.18	3.29
	Amps	8.6	8.8	9.1	9.5	9.3	9.6	9.9	10.3	10.2	10.4	10.8	11.2	10.9	11.2	11.6	12.0	11.6	11.9	12.3	12.8	12.3	12.6	13.1	13.6
	Hi PR	237	255	269	281	266	286	302	315	302	325	344	358	344	371	391	408	388	417	440	459	428	461	487	507
Lo PR	102	108	118	126	108	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	158	
1200	MBh	32.5	33.5	36.2	38.9	31.8	32.7	35.4	38.0	31.0	31.9	34.5	37.1	30.2	31.1	33.7	36.2	28.7	29.6	32.0	34.4	26.6	27.4	29.7	31.8
	S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.82	0.62	0.40
	Δ T	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10
	kW	2.40	2.45	2.52	2.60	2.58	2.63	2.71	2.80	2.73	2.79	2.88	2.97	2.87	2.94	3.03	3.13	2.99	3.06	3.16	3.26	3.09	3.16	3.27	3.37
	Amps	8.8	9.1	9.4	9.7	9.6	9.8	10.2	10.6	10.5	10.7	11.1	11.5	11.2	11.5	11.9	12.4	12.0	12.3	12.7	13.2	12.7	13.0	13.5	14.0
	Hi PR	244	263	278	290	274	295	312	325	312	336	354	370	355	382	404	421	399	430	454	473	441	475	502	523
Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	
1350	MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.3	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42
	Δ T	19	18	14	10	19	18	15	10	19	18	15	10	20	19	15	10	19	18	15	10	18	17	14	9
	kW	2.41	2.46	2.54	2.62	2.60	2.65	2.73	2.82	2.76	2.81	2.90	3.00	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.29	3.12	3.19	3.29	3.40
	Amps	8.9	9.2	9.5	9.8	9.7	9.9	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.2	13.6	14.1
	Hi PR	247	266	280	292	277	298	315	328	315	339	358	373	359	386	408	425	403	434	459	478	446	480	507	528
Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

COOLING DATA — DX13SN0361A\* / CA\*F3636\*6D\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	30.5	31.2	33.3	35.6	29.8	30.5	32.6	34.8	29.1	29.8	31.8	34.0	28.4	29.0	31.0	33.2	27.0	27.6	29.5	31.5	25.0	25.5	27.3	29.2
	S/T	0.85	0.79	0.65	0.5	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.5	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.6	0.97	0.91	0.74	0.56
	Δ T	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	20	18	14
	kW	2.36	2.41	2.48	2.6	2.53	2.59	2.67	2.75	2.69	2.75	2.83	2.9	2.83	2.89	2.98	3.08	2.94	3.01	3.10	3.2	3.04	3.11	3.21	3.32
	Amps	8.7	8.9	9.2	9.6	9.4	9.7	10.0	10.4	10.3	10.5	10.9	11.3	11.0	11.3	11.7	12.1	11.7	12.0	12.4	12.9	12.5	12.8	13.2	13.7
	Hi PR	239	258	272	283.7	269	289	305	318	305	329	347	362.1	348	374	395	412	391	421	445	463.9	432	465	491	513
	Lo PR	103	109	120	127.3	109	116	126	134	113	120	131	139.8	119	126	138	147	124	132	144	153.8	129	137	149	159
	MBh	33.1	33.8	36.1	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	30.8	31.4	33.6	35.9	29.2	29.9	31.9	34.1	27.1	27.7	29.6	31.6
	S/T	0.88	0.82	0.67	0.5	0.91	0.85	0.70	0.52	0.93	0.88	0.71	0.5	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.6	1.00	0.95	0.77	0.58
	Δ T	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	21	19	15	21	20	17	14
kW	2.42	2.46	2.54	2.6	2.60	2.65	2.73	2.82	2.76	2.81	2.90	3.0	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.3	3.12	3.19	3.29	3.40	
Amps	8.9	9.2	9.5	9.8	9.7	9.9	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.2	13.6	14.1	
Hi PR	247	266	280	292.5	277	298	315	328	315	339	358	373.3	359	386	408	425	404	434	459	478.3	446	480	507	528	
Lo PR	106	113	123	131.2	112	119	130	139	116	124	135	144.1	122	130	142	151	128	136	149	158.6	133	141	154	164	
MBh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.5	32.6	
S/T	0.92	0.86	0.70	0.5	0.96	0.90	0.73	0.54	1.00	0.92	0.75	0.6	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60	
Δ T	21	20	18	14	22	21	18	14	22	21	18	14	22	21	18	15	21	21	18	14	19	19	17	13	
kW	2.43	2.48	2.56	2.6	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.0	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.3	3.15	3.21	3.32	3.43	
Amps	9.0	9.2	9.6	9.9	9.8	10.0	10.4	10.8	10.7	10.9	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.3	13.7	14.3	
Hi PR	249	268	283	295.4	280	301	318	331	318	342	361	377.0	362	390	412	429	408	439	463	483.1	450	485	512	534	
Lo PR	107	114	124	132.5	113	120	131	140	118	125	137	145.5	124	131	144	153	130	138	150	160.2	134	143	156	166	
85	MBh	31.1	31.7	33.2	35.4	30.3	30.9	32.4	34.6	29.6	30.2	31.6	33.7	28.9	29.5	30.9	32.9	27.5	28.0	29.3	31.3	25.4	25.9	27.2	29.0
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	0.98	0.89	0.72
	Δ T	24	24	22	19	24	24	23	20	24	24	23	20	25	24	23	20	24	24	23	20	22	22	21	18
	kW	2.38	2.43	2.50	2.58	2.55	2.61	2.69	2.77	2.71	2.77	2.86	2.95	2.85	2.91	3.00	3.10	2.97	3.03	3.13	3.23	3.07	3.13	3.24	3.34
	Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.1	10.5	10.4	10.6	11.0	11.4	11.1	11.4	11.8	12.2	11.8	12.1	12.6	13.1	12.6	12.9	13.3	13.9
	Hi PR	242	260	275	287	271	292	308	322	309	332	351	366	351	378	399	416	395	425	449	469	437	470	496	518
	Lo PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161
	MBh	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.5	32.1	32.7	34.3	36.6	31.3	31.9	33.4	35.7	29.7	30.3	31.8	33.9	27.6	28.1	29.4	31.4
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75
	Δ T	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	23	23	22	19	21	22	21	18
kW	2.43	2.48	2.56	2.64	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.02	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.32	3.15	3.21	3.32	3.43	
Amps	9.0	9.2	9.6	9.9	9.8	10.0	10.4	10.8	10.7	10.9	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.3	13.7	14.3	
Hi PR	249	268	283	295	280	301	318	331	318	342	361	377	362	390	412	429	408	439	463	483	450	485	512	534	
Lo PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	
MBh	34.7	35.3	37.0	39.5	33.9	34.5	36.2	38.6	33.1	33.7	35.3	37.7	32.3	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	
S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78	
Δ T	23	22	21	18	23	23	21	19	23	23	21	19	22	22	22	19	21	21	21	18	19	20	20	17	
kW	2.45	2.50	2.58	2.66	2.64	2.69	2.78	2.87	2.80	2.86	2.95	3.05	2.94	3.01	3.10	3.21	3.07	3.13	3.24	3.34	3.17	3.24	3.35	3.46	
Amps	9.1	9.3	9.7	10.0	9.9	10.1	10.5	10.9	10.8	11.0	11.4	11.9	11.5	11.8	12.2	12.7	12.3	12.6	13.1	13.6	13.1	13.4	13.9	14.4	
Hi PR	252	271	286	298	282	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	489	517	539	
Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

# COOLING DATA — DX13SN0421A\* / CA\*F3642\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-	
		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
		Δ T	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	
	1400	kW	2.81	2.86	2.94	-	3.00	3.06	3.15	-	3.17	3.24	3.33	-	3.33	3.39	3.50	-	3.45	3.53	3.63	-	3.57	3.64	3.75	-	
		Amps	10.3	10.6	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	12.9	13.2	13.7	-	13.7	14.1	14.5	-	14.5	14.9	15.4	-	
		Hi PR	220	237	250	-	247	266	281	-	281	302	319	-	320	344	363	-	360	387	409	-	398	428	452	-	
	1575	Lo PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	147	-	
		MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-	
		S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.49	-	0.86	0.72	0.50	-	
	75	1225	Δ T	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-
			kW	2.87	2.92	3.01	-	3.07	3.13	3.22	-	3.25	3.31	3.41	-	3.40	3.47	3.58	-	3.54	3.61	3.72	-	3.65	3.73	3.84	-
			Amps	10.6	10.9	11.2	-	11.5	11.7	12.1	-	12.4	12.7	13.1	-	13.3	13.6	14.0	-	14.1	14.5	14.9	-	15.0	15.3	15.8	-
1400		Hi PR	227	244	258	-	255	274	289	-	289	312	329	-	330	355	375	-	371	399	421	-	410	441	466	-	
		Lo PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	139	-	126	134	146	-	130	138	151	-	
		MBh	39.2	40.6	44.5	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	36.5	37.8	41.4	-	34.6	35.9	39.3	-	32.1	33.3	36.4	-	
1575		S/T	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.90	0.75	0.52	-	0.90	0.76	0.52	-	
		Δ T	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
		kW	2.89	2.94	3.03	-	3.09	3.15	3.25	-	3.27	3.34	3.44	-	3.43	3.50	3.61	-	3.56	3.64	3.75	-	3.68	3.76	3.87	-	
1225		Amps	10.7	11.0	11.3	-	11.6	11.8	12.2	-	12.5	12.8	13.3	-	13.4	13.7	14.2	-	14.2	14.6	15.1	-	15.1	15.5	16.0	-	
		Hi PR	229	247	260	-	257	277	292	-	292	315	332	-	333	358	378	-	375	403	426	-	414	445	470	-	
		Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	148	-	131	140	153	-	
1400	MBh	35.7	36.8	39.8	42.7	34.9	35.9	38.9	41.7	34.1	35.1	38.0	40.7	33.2	34.2	37.0	39.7	36.0	37.1	40.1	43.1	40.9	31.7	32.6	35.3	37.9	
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.97	0.88	0.66	0.43		
	Δ T	22	20	17	11	22	21	17	12	22	21	17	12	23	20	17	12	22	20	16	11	22	20	19	15	11	
1575	kW	2.83	2.88	2.96	3.05	3.02	3.08	3.17	3.27	3.20	3.26	3.36	3.46	3.35	3.42	3.52	3.63	3.43	3.50	3.61	3.72	3.87	3.68	3.76	3.88	4.00	
	Amps	10.4	10.7	11.0	11.4	11.2	11.5	11.9	12.3	12.2	12.5	12.9	13.4	13.0	13.3	13.8	14.3	13.4	13.7	14.2	14.7	15.2	14.7	15.0	15.5	16.1	
	Hi PR	222	239	253	263	249	268	283	296	284	305	322	336	323	348	367	383	323	348	367	383	402	402	432	456	476	
1225	Lo PR	102	108	118	126	108	115	125	133	112	119	130	138	118	125	137	145	118	129	141	150	127	136	148	158		
	MBh	38.7	39.8	43.1	46.3	37.8	38.9	42.1	45.2	36.9	38.0	41.1	44.1	36.0	37.1	40.1	43.1	36.0	38.2	41.3	44.4	40.9	32.6	33.6	36.4	39.0	
	S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43		
1400	Δ T	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	22	20	19	15	11	
	kW	2.89	2.95	3.03	3.12	3.09	3.15	3.25	3.35	3.27	3.34	3.44	3.54	3.43	3.50	3.61	3.72	3.57	3.64	3.75	3.87	3.68	3.76	3.88	4.00		
	Amps	10.7	11.0	11.3	11.7	11.6	11.8	12.2	12.7	12.5	12.8	13.3	13.8	13.4	13.7	14.2	14.7	13.4	14.3	14.6	15.1	15.7	15.1	15.5	16.0	16.6	
1575	Hi PR	229	247	260	272	257	277	292	305	292	315	332	347	333	358	378	395	333	358	378	395	414	414	446	470	491	
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163		
	MBh	39.9	41.0	44.4	47.7	38.9	40.1	43.4	46.6	38.0	39.1	42.4	45.5	37.1	38.2	41.3	44.4	37.1	38.2	41.3	44.4	42.1	32.6	33.6	36.4	39.0	
1225	S/T	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.70	0.45		
	Δ T	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	21	19	18	15	10	
	kW	2.91	2.97	3.05	3.14	3.12	3.18	3.27	3.37	3.30	3.36	3.47	3.57	3.46	3.53	3.64	3.75	3.59	3.67	3.78	3.90	3.71	3.79	3.91	4.03		
1400	Amps	10.8	11.1	11.4	11.8	11.7	11.9	12.3	12.8	12.7	13.0	13.4	13.9	13.5	13.8	14.3	14.8	14.4	14.7	15.2	15.8	15.2	15.6	16.1	16.7		
	Hi PR	231	249	263	274	260	279	295	308	295	318	336	350	336	362	382	399	336	362	382	399	378	407	430	449	496	
	Lo PR	106	113	123	131	112	119	130	139	117	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

COOLING DATA — DX13SN0421A\* / CA\*F3642\*6D\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1225	MBh	36.4	37.1	39.7	42.4	35.5	36.3	38.8	41.4	34.7	35.4	37.8	40.5	33.8	34.6	36.9	39.5	32.1	32.8	35.1	37.5	29.8	30.4	32.5	34.7	
		S/T	0.90	0.85	0.69	0.5	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.5	0.99	0.93	0.76	0.57	1.03	0.96	0.78	0.6	1.04	0.97	0.79	0.59	
	1400	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	21	15	
		kW	2.85	2.90	2.98	3.1	3.05	3.11	3.20	3.29	3.22	3.29	3.39	3.5	3.38	3.45	3.55	3.66	3.51	3.58	3.69	3.8	3.62	3.70	3.81	3.93	
	1575	Amps	10.5	10.8	11.1	11.5	11.4	11.6	12.0	12.4	12.3	12.6	13.0	13.5	13.2	13.5	13.9	14.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.3	
		Hi PR	225	242	255	266.1	252	271	286	299	287	308	326	339.6	326	351	371	387	367	395	417	435.1	406	437	461	481	
	85	1225	Lo PR	103	110	120	127.4	109	116	126	135	113	120	131	139.8	119	126	138	147	124	132	145	154.0	129	137	150	159
			MBh	39.4	40.2	43.0	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	36.6	37.4	40.0	42.8	34.8	35.6	38.0	40.6	32.2	32.9	35.2	37.6
		1400	S/T	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.6	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61
			ΔT	24	23	20	16	25	23	20	16	25	24	20	16	24	24	21	16	23	23	20	16	21	22	19	15
1575		kW	2.91	2.97	3.05	3.1	3.12	3.18	3.27	3.37	3.30	3.36	3.47	3.6	3.46	3.53	3.64	3.75	3.59	3.67	3.78	3.9	3.71	3.79	3.91	4.03	
		Amps	10.8	11.1	11.4	11.8	11.7	11.9	12.3	12.8	12.7	13.0	13.4	13.9	13.5	13.9	14.3	14.8	14.4	14.7	15.2	15.8	15.2	15.6	16.1	16.7	
1225		Hi PR	231	249	263	274.3	260	279	295	308	295	318	336	350.1	336	362	382	399	378	407	430	448.6	418	450	475	496	
		Lo PR	106	113	123	131.3	112	119	130	139	117	124	135	144.2	122	130	142	151	128	137	149	158.7	133	141	154	164	
1400		MBh	40.6	41.5	44.3	47.3	39.6	40.5	43.3	46.2	38.7	39.5	42.2	45.1	37.7	38.6	41.2	44.0	35.9	36.6	39.1	41.8	33.2	33.9	36.3	38.8	
		S/T	1.00	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.6	1.00	1.00	0.86	0.64	
1575	ΔT	24	22	19	15	23	20	16	12	23	23	20	16	22	23	20	16	21	21	19	16	19	20	18	15		
	kW	2.93	2.99	3.08	3.2	3.14	3.20	3.30	3.40	3.32	3.39	3.49	3.6	3.48	3.56	3.66	3.78	3.62	3.70	3.81	3.9	3.74	3.82	3.94	4.06		
1225	Amps	10.9	11.2	11.5	11.9	11.8	12.0	12.4	12.9	12.8	13.1	13.5	14.0	13.6	14.0	14.4	15.0	14.5	14.9	15.4	15.9	15.4	15.7	16.3	16.9		
	Hi PR	234	252	266	277.1	262	282	298	311	298	321	339	353.6	340	366	386	403	382	411	434	453.1	422	455	480	501		
1400	Lo PR	107	114	125	132.6	113	121	132	140	118	125	137	145.6	124	132	144	153	130	138	151	160.3	134	143	156	166		
	MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4		
1575	S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80		
	ΔT	26	25	24	21	26	26	24	21	25	26	24	21	24	25	25	21	23	24	24	21	22	22	23	20		
1225	kW	2.87	2.92	3.01	3.10	3.07	3.13	3.22	3.32	3.25	3.31	3.41	3.52	3.40	3.47	3.58	3.69	3.54	3.61	3.72	3.84	3.65	3.73	3.84	3.97		
	Amps	10.6	10.9	11.2	11.6	11.5	11.7	12.1	12.6	12.4	12.7	13.1	13.6	13.3	13.6	14.0	14.6	14.1	14.5	14.9	15.5	14.9	15.3	15.8	16.4		
1400	Hi PR	227	244	258	269	254	274	289	302	289	311	329	343	330	355	375	391	371	399	421	439	410	441	466	486		
	Lo PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161		
1575	MBh	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	39.4	40.1	42.0	44.8	38.4	39.1	41.0	43.7	36.5	37.2	38.9	41.5	33.8	34.4	36.1	38.5		
	S/T	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.83		
1225	ΔT	24	24	23	20	24	24	23	20	23	23	23	20	22	23	24	20	21	22	23	20	20	20	21	19		
	kW	2.95	3.01	3.10	3.19	3.16	3.23	3.32	3.42	3.35	3.42	3.52	3.63	3.51	3.58	3.69	3.81	3.65	3.73	3.84	3.96	3.77	3.85	3.97	4.10		
1400	Amps	11.0	11.3	11.6	12.0	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	13.8	14.1	14.6	15.1	14.6	15.0	15.5	16.1	15.5	15.9	16.4	17.1		
	Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506		
1575	Lo PR	108	115	126	134	114	122	133	142	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

# COOLING DATA — DX13SN0481A\* / CA\*F4860\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1400	MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.81	0.68	0.47	-	
		Δ T	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	
	1600	kW	3.22	3.28	3.37	-	3.44	3.51	3.62	-	3.64	3.72	3.83	-	3.82	3.90	4.02	-	3.97	4.05	4.18	-	4.10	4.19	4.32	-	
		Amps	11.8	12.1	12.5	-	12.8	13.1	13.5	-	13.9	14.2	14.7	-	14.8	15.2	15.7	-	15.8	16.2	16.7	-	16.7	17.1	17.7	-	
		Hi PR	241	259	274	-	270	291	307	-	307	331	349	-	350	377	398	-	394	424	448	-	435	468	494	-	
	1800	Lo PR	104	110	120	-	110	117	127	-	114	121	132	-	120	127	139	-	125	133	146	-	130	138	151	-	
		MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-	
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-	
	75	1400	Δ T	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
			kW	3.29	3.35	3.45	-	3.52	3.59	3.70	-	3.73	3.80	3.92	-	3.91	3.99	4.12	-	4.07	4.15	4.28	-	4.20	4.29	4.42	-
			Amps	12.2	12.5	12.9	-	13.1	13.5	13.9	-	14.3	14.6	15.1	-	15.3	15.6	16.2	-	16.2	16.6	17.2	-	17.2	17.6	18.2	-
1600		Hi PR	248	267	282	-	279	300	317	-	317	341	360	-	361	388	410	-	406	437	461	-	449	483	510	-	
		Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	
		MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-	
1800		S/T	0.77	0.64	0.44	-	0.80	0.67	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.49	-	0.87	0.73	0.51	-	0.88	0.74	0.51	-	
		Δ T	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-	
		kW	3.31	3.38	3.48	-	3.55	3.62	3.73	-	3.76	3.83	3.95	-	3.94	4.02	4.15	-	4.10	4.18	4.32	-	4.23	4.32	4.46	-	
75		1400	Amps	12.3	12.6	13.0	-	13.3	13.6	14.0	-	14.4	14.8	15.3	-	15.4	15.8	16.3	-	16.4	16.8	17.4	-	17.4	17.8	18.4	-
			Hi PR	243	262	276	288	273	294	310	324	311	334	353	368	354	381	402	419	398	428	452	472	440	473	500	521
			Lo PR	105	111	122	130	111	118	129	137	115	122	134	142	121	129	140	149	127	135	147	157	131	139	152	162
	1600	MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6	
		S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	
		Δ T	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
	1800	kW	3.31	3.38	3.48	3.58	3.55	3.62	3.73	3.84	3.76	3.83	3.95	4.08	3.94	4.02	4.15	4.28	4.10	4.18	4.32	4.45	4.23	4.32	4.46	4.60	
		Amps	12.3	12.6	13.0	13.5	13.3	13.6	14.0	14.6	14.4	14.8	15.3	15.8	15.4	15.8	16.3	16.9	16.4	16.8	17.4	18.0	17.4	17.8	18.4	19.1	
		Hi PR	251	270	285	297	281	303	320	334	320	344	364	379	365	392	414	432	410	441	466	486	453	488	515	537	
	1800	Lo PR	108	115	125	134	114	121	132	141	119	126	138	147	125	132	145	154	131	139	152	161	135	144	157	167	
		MBh	45.8	47.2	51.1	54.8	44.8	46.1	49.9	53.6	43.7	45.0	48.7	52.3	42.6	43.9	47.5	51.0	40.5	41.7	45.1	48.5	37.5	38.6	41.8	44.9	
		S/T	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.99	0.89	0.67	0.43	1.00	0.90	0.68	0.44	
75	1400	Δ T	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	14	10	
		kW	3.34	3.40	3.50	3.61	3.58	3.65	3.76	3.87	3.79	3.86	3.98	4.11	3.97	4.06	4.18	4.31	4.13	4.22	4.35	4.49	4.27	4.36	4.50	4.64	
		Amps	12.4	12.7	13.1	13.6	13.4	13.7	14.2	14.7	14.5	14.9	15.4	16.0	15.6	15.9	16.5	17.1	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3	
	1600	Hi PR	253	273	288	300	284	306	323	337	323	348	367	383	368	396	418	436	414	446	471	491	458	493	520	543	
		Lo PR	109	116	127	135	115	123	134	143	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	
		MBh	46.1	47.7	51.6	55.3	45.1	46.4	50.1	53.8	44.9	46.2	49.9	53.6	43.9	45.2	48.9	52.6	41.7	42.9	46.6	50.3	39.6	40.7	43.9	47.6	
	1800	S/T	0.89	0.80	0.60	0.39	0.92	0.82	0.61	0.39	0.94	0.84	0.63	0.40	0.97	0.87	0.66	0.43	1.00	0.90	0.68	0.44	1.01	0.90	0.68	0.44	
		Δ T	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	19	16	11	19	18	14	10	
		kW	3.37	3.43	3.53	3.64	3.60	3.67	3.78	3.89	3.81	3.88	3.99	4.10	3.96	4.04	4.15	4.26	4.07	4.15	4.26	4.37	4.24	4.33	4.44	4.55	
	1800	Amps	12.5	12.8	13.2	13.7	13.5	13.8	14.3	14.8	14.6	14.9	15.4	16.0	15.7	16.0	16.5	17.1	16.7	17.1	17.6	18.2	17.6	18.1	18.7	19.4	
		Hi PR	257	276	291	303	287	309	326	340	326	350	369	386	371	399	420	439	417	449	470	491	459	494	521	548	
		Lo PR	110	117	128	136	117	124	135	144	121	128	140	149	127	135	147	157	133	141	153	163	137	146	159	170	

Shaded area reflects ACCA (TVA) conditions  
 IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power



COOLING DATA — DX13SN0481A\* / CA\*F4860\*6D\*+EEP (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
		65°F						75°F						85°F						95°F						105°F						115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
		AIRFLOW			S/T			Δ T			kW			Amps			Hi PR			Lo PR			ENTERING INDOOR WET BULB TEMPERATURE			59			63			67			71			75			79			83			87			91			95			99			103			107			111			115																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
80	1400	MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9	0.88	0.83	0.67	0.5	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.6	1.01	0.95	0.77	0.58	24	23	20	16	24	23	20	16	25	24	21	16	24	23	20	16	24	23	20	16	23	22	19	15	3.26	3.33	3.42	3.5	3.49	3.56	3.67	3.78	3.70	3.77	3.89	4.0	3.88	3.96	4.08	4.21	4.03	4.12	4.25	4.4	4.17	4.25	4.39	4.53	12.1	12.3	12.7	13.2	13.0	13.3	13.8	14.3	14.2	14.5	15.0	15.5	15.1	15.5	16.0	16.6	16.1	16.5	17.0	17.7	17.1	17.5	18.1	18.8	246	264	279	291.3	276	297	313	327	314	338	356	371.7	357	384	406	423	402	432	457	476.3	444	478	505	526	106	113	123	130.9	112	119	130	138	116	124	135	143.7	122	130	142	151	128	136	149	158.2	132	141	154	164	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3	0.91	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.6	1.00	0.98	0.80	0.60	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	21	21	19	15	3.34	3.40	3.50	3.6	3.58	3.65	3.76	3.87	3.79	3.86	3.98	4.1	3.97	4.06	4.18	4.31	4.13	4.22	4.35	4.5	4.27	4.36	4.50	4.64	12.4	12.7	13.1	13.6	13.4	13.7	14.2	14.7	14.6	14.9	15.4	16.0	15.6	15.9	16.5	17.1	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3	253	273	288	300.3	284	306	323	337	323	348	367	383.2	368	396	419	436	414	446	471	491.1	458	493	520	543	109	116	127	134.9	115	123	134	143	120	127	139	148.1	126	134	146	156	132	140	153	163.1	136	145	158	169	46.7	47.7	50.9	54.4	45.6	46.6	49.7	53.2	44.5	45.5	48.6	51.9	43.4	44.3	47.4	50.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6	0.96	0.90	0.73	0.5	1.00	0.93	0.76	0.57	1.00	0.95	0.78	0.6	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.6	1.00	1.00	0.84	0.63	23	22	19	15	23	22	19	15	23	22	19	15	22	23	19	16	21	21	19	15	20	20	18	14	3.36	3.43	3.53	3.6	3.60	3.68	3.79	3.90	3.82	3.89	4.01	4.1	4.00	4.09	4.21	4.35	4.16	4.25	4.39	4.5	4.30	4.39	4.53	4.68	12.5	12.8	13.2	13.7	13.5	13.8	14.3	14.8	14.7	15.0	15.5	16.1	15.7	16.1	16.6	17.2	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5	256	275	291	303.3	287	309	326	340	327	351	371	387.1	372	400	423	441	418	450	476	496.0	462	498	525	548	110	117	128	136.3	116	124	135	144	121	129	140	149.6	127	135	148	157	133	142	155	164.7	138	147	160	170	85	1400	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	23	20	3.29	3.35	3.45	3.55	3.52	3.59	3.70	3.81	3.73	3.80	3.92	4.04	3.91	3.99	4.11	4.24	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56	12.2	12.5	12.9	13.3	13.1	13.5	13.9	14.4	14.3	14.6	15.1	15.7	15.3	15.6	16.2	16.8	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9	248	267	282	294	279	300	317	330	317	341	360	375	361	388	410	428	406	437	461	481	448	483	510	532	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	25	25	24	20	26	25	24	21	25	25	24	21	25	25	24	21	25	24	24	21	23	24	22	19	3.36	3.43	3.53	3.64	3.60	3.68	3.79	3.90	3.82	3.89	4.01	4.14	4.00	4.09	4.21	4.35	4.16	4.25	4.39	4.53	4.30	4.39	4.53	4.68	12.5	12.8	13.2	13.7	13.5	13.8	14.3	14.8	14.7	15.0	15.5	16.1	15.7	16.1	16.6	17.2	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5	256	275	291	303	287	309	326	340	327	351	371	387	372	400	423	441	418	450	476	496	462	498	525	548	110	117	128	136	116	124	135	144	121	129	140	150	127	135	148	157	133	142	155	165	138	147	160	170	1600	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166	139	148	162	172	1800	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166	139	148	162	172
		85	1400	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	23	20	3.29	3.35	3.45	3.55	3.52	3.59	3.70	3.81	3.73	3.80	3.92	4.04	3.91	3.99	4.11	4.24	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56	12.2	12.5	12.9	13.3	13.1	13.5	13.9	14.4	14.3	14.6	15.1	15.7	15.3	15.6	16.2	16.8	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9	248	267	282	294	279	300	317	330	317	341	360	375	361	388	410	428	406	437	461	481	448	483	510	532	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	25	25	24	20	26	25	24	21	25	25	24	21	25	25	24	21	25	24	24	21	23	24	22	19	3.36	3.43	3.53	3.64	3.60	3.68	3.79	3.90	3.82	3.89	4.01	4.14	4.00	4.09	4.21	4.35	4.16	4.25	4.39	4.53	4.30	4.39	4.53	4.68	12.5	12.8	13.2	13.7	13.5	13.8	14.3	14.8	14.7	15.0	15.5	16.1	15.7	16.1	16.6	17.2	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5	256	275	291	303	287	309	326	340	327	351	371	387	372	400	423	441	418	450	476	496	462	498	525	548	110	117	128	136	116	124	135	144	121	129	140	150	127	135	148	157	133	142	155	165	138	147	160	170	1600	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166			139	148	162	172	1800	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166	139	148	162	172																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
				1600	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166	139	148	162	172	1800	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166	139		148	162	172																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
					1800	MBh	47.5	48.4	50.7	54.1	46.4	47.3	49.5	52.8	45.3	46.1	48.3	51.6	44.2	45.0	47.1	50.3	42.0	42.8	44.8	47.8	38.9	39.6	41.5	44.3	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.90	0.81	1.00	1.00	0.96	0.78	24	24	24	23	24	24	24	23	20	23	24	23	20	23	23	20	21	22	23	20	20	20	20	18	3.39	3.45	3.56	3.66	3.63	3.70	3.82	3.93	3.85	3.93	4.05	4.17	4.04	4.12	4.25	4.38	4.20	4.29	4.42	4.56	4.34	4.43	4.57	4.72	12.6	12.9	13.3	13.8	13.6	14.0	14.4	15.0	14.8	15.2	15.7	16.3	15.8	16.2	16.8	17.4	16.9	17.3	17.9	18.5	17.9	18.3	18.9	19.7	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	111	118	129	138	118	125	137	145	122	130	142	151	128	137	149	159	134	143	156	166	139	148	162		172																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power



# COOLING DATA — DX13SN0601A\* / CA\*F4961\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1750	MBh	54.2	56.2	61.6	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-	44.4	46.0	50.4	-
		S/T	0.69	0.58	0.40	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-
		Δ T	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	19	16	12	-
	1750	kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-	5.21	5.32	5.49	-
		Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
		Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-
	1750	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-
		MBh	54.2	56.2	61.6	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-	44.4	46.0	50.4	-
		S/T	0.69	0.58	0.40	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-
	2250	Δ T	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
		kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-
		Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
2250	Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-	
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-	
	MBh	56.1	58.2	63.7	-	54.8	56.8	62.3	-	53.5	55.5	60.8	-	52.2	54.1	59.3	-	49.6	51.4	56.3	-	45.9	47.6	52.2	-	
2250	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
	Δ T	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-	
	kW	4.09	4.18	4.31	-	4.40	4.49	4.63	-	4.67	4.77	4.92	-	4.91	5.02	5.18	-	5.12	5.23	5.40	-	5.29	5.41	5.58	-	
2250	Amps	15.5	15.9	16.4	-	16.8	17.2	17.8	-	18.3	18.8	19.4	-	19.6	20.1	20.8	-	20.9	21.4	22.1	-	22.1	22.7	23.5	-	
	Hi PR	264	284	300	-	296	319	337	-	337	363	383	-	384	413	436	-	432	465	491	-	477	514	542	-	
	Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	
75	1750	MBh	55.1	56.8	61.5	66.0	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0				
		S/T	0.79	0.71	0.53	0.34	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39				
		Δ T	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11				
	1750	kW	4.06	4.15	4.27	4.41	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72				
		Amps	15.4	15.8	16.3	16.9	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2				
		Hi PR	262	282	297	310	334	359	379	396	380	409	432	451	428	460	486	507	473	509	537	560				
	1750	Lo PR	106	113	124	132	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165				
		MBh	55.1	56.8	61.5	66.0	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0				
		S/T	0.79	0.71	0.53	0.34	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39				
	1750	Δ T	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11				
		kW	4.06	4.15	4.27	4.41	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72				
		Amps	15.4	15.8	16.3	16.9	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2				
2250	Hi PR	262	282	297	310	334	359	379	396	380	409	432	451	428	460	486	507	473	509	537	560					
	Lo PR	106	113	124	132	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165					
	MBh	57.1	58.8	63.6	68.3	54.4	56.0	60.7	65.1	53.1	54.7	59.2	63.5	50.4	51.9	56.2	60.3	46.7	48.1	52.1	55.9					
2250	S/T	0.84	0.75	0.57	0.36	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42					
	Δ T	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10					
	kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.62					
2250	Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2					
	Hi PR	267	287	303	316	299	322	340	355	341	366	387	404	388	417	441	460	436	470	496	517					
	Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162					

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

COOLING DATA — DX13SN0601A\* / CA\*F4961\*6D\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1750	MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6
		S/T	0.86	0.81	0.66	0.5	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.6	0.99	0.93	0.76	0.57
		ΔT	25	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	16	24	23	20	16
		kW	4.09	4.18	4.31	4.4	4.40	4.49	4.64	4.78	4.67	4.77	4.93	5.1	4.91	5.02	5.18	5.35	5.12	5.23	5.40	5.6	5.29	5.41	5.59	5.77
		Amps	15.5	15.9	16.4	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.1	19.6	20.1	20.8	21.6	20.9	21.4	22.1	23.0	22.2	22.7	23.5	24.4
	2250	Hi PR	264	284	300	313.2	297	319	337	351	337	363	383	399.7	384	413	437	455	432	465	491	512.2	477	514	543	566
		Lo PR	107	114	125	133.0	114	121	132	140	118	126	137	146.0	124	132	144	153	130	138	151	160.7	134	143	156	166
		MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6
		S/T	0.86	0.81	0.66	0.5	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.6	0.99	0.93	0.76	0.57
		ΔT	25	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	16	24	23	20	16
85	1750	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2
		S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
		ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	25	22	25	25	24	21
		kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.63	5.34	5.45	5.63	5.82
		Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2	22.4	22.9	23.7	24.6
	2250	Hi PR	267	287	303	316	300	322	340	355	341	367	387	404	388	417	441	460	436	470	496	517	482	519	548	572
		Lo PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168
		MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2
		S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
		ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	25	22	25	25	24	21

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

# COOLING DATA — DX13SN0611A\* / CA\*F4961\*6D\*+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	59.9	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-
	S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.61	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-
	Δ T	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-
	kW	4.00	4.08	4.21	-	4.31	4.40	4.54	-	4.58	4.68	4.84	-	4.82	4.93	5.09	-	5.03	5.14	5.31	-	5.20	5.32	5.50	-
	Amps	15.5	15.9	16.4	-	16.8	17.2	17.8	-	18.3	18.8	19.4	-	19.6	20.1	20.8	-	20.9	21.4	22.2	-	22.2	22.7	23.5	-
	Hi PR	249	268	283	-	280	301	318	-	318	342	362	-	362	390	412	-	408	439	463	-	451	485	512	-
	Lo PR	100	106	116	-	105	112	122	-	109	116	127	-	115	122	133	-	120	128	140	-	125	132	145	-
	MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-
	S/T	0.65	0.54	0.38	-	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.75	0.62	0.43	-
	Δ T	21	19	14	-	22	19	14	-	22	19	14	-	22	19	14	-	22	19	14	-	20	17	13	-
	kW	3.97	4.05	4.18	-	4.27	4.37	4.51	-	4.54	4.64	4.80	-	4.78	4.89	5.05	-	4.99	5.10	5.27	-	5.16	5.28	5.45	-
	Amps	15.4	15.8	16.3	-	16.7	17.1	17.7	-	18.1	18.6	19.2	-	19.4	19.9	20.6	-	20.7	21.2	22.0	-	22.0	22.5	23.3	-
Hi PR	247	266	281	-	277	298	315	-	315	339	358	-	359	386	408	-	404	434	459	-	446	480	507	-	
Lo PR	99	105	115	-	104	111	121	-	108	115	126	-	114	121	132	-	119	127	138	-	123	131	143	-	
MBh	55.6	57.7	63.2	-	54.3	56.3	61.7	-	53.0	55.0	60.2	-	51.8	53.6	58.8	-	49.2	51.0	55.8	-	45.5	47.2	51.7	-	
S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	
Δ T	16	14	10	-	16	14	10	-	16	14	10	-	16	14	11	-	16	14	10	-	15	13	10	-	
kW	4.03	4.12	4.25	-	4.34	4.44	4.58	-	4.62	4.72	4.88	-	4.86	4.97	5.13	-	5.07	5.18	5.36	-	5.25	5.37	5.55	-	
Amps	15.7	16.1	16.6	-	17.0	17.4	18.0	-	18.5	19.0	19.6	-	19.8	20.3	21.0	-	21.1	21.6	22.4	-	22.4	23.0	23.7	-	
Hi PR	252	271	286	-	283	304	321	-	321	346	365	-	366	394	416	-	412	443	468	-	455	490	517	-	
Lo PR	101	107	117	-	106	113	123	-	110	118	128	-	116	123	135	-	122	129	141	-	126	134	146	-	

75	MBh	56.3	58.0	62.7	67.3	55.0	56.6	61.3	65.8	53.7	55.3	59.8	64.2	52.4	53.9	58.4	62.6	49.8	51.2	55.5	59.5	46.1	47.5	51.4	55.1
	S/T	0.78	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39
	Δ T	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11
	kW	4.03	4.12	4.25	4.39	4.34	4.44	4.58	4.73	4.62	4.72	4.88	5.04	4.86	4.97	5.14	5.31	5.07	5.18	5.36	5.54	5.25	5.37	5.55	5.74
	Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	19.0	19.6	20.4	19.8	20.3	21.0	21.8	21.1	21.6	22.4	23.3	22.4	23.0	23.8	24.7
	Hi PR	252	271	286	299	283	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	490	517	539
	Lo PR	101	107	117	124	106	113	123	131	110	118	128	137	116	123	135	144	122	129	141	150	126	134	146	156
	MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8	44.7	46.1	49.9	53.5
	S/T	0.74	0.66	0.50	0.32	0.77	0.69	0.52	0.33	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.85	0.76	0.57	0.37
	Δ T	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	23	21	18	12
	kW	4.00	4.09	4.21	4.35	4.31	4.40	4.54	4.69	4.58	4.68	4.84	5.00	4.82	4.93	5.09	5.26	5.03	5.14	5.31	5.49	5.20	5.32	5.50	5.69
	Amps	15.5	15.9	16.5	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.2	19.6	20.1	20.8	21.6	20.9	21.4	22.2	23.0	22.2	22.7	23.5	24.4
Hi PR	249	268	283	296	280	301	318	332	318	343	362	377	363	390	412	430	408	439	463	483	451	485	512	534	
Lo PR	100	106	116	123	105	112	122	130	109	116	127	135	115	122	133	142	120	128	140	149	125	133	145	154	
MBh	56.6	58.3	63.1	67.7	55.3	56.9	61.6	66.1	53.9	55.5	60.1	64.5	52.6	54.2	58.7	63.0	50.0	51.5	55.7	59.8	46.3	47.7	51.6	55.4	
S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
Δ T	18	17	14	9	18	17	14	10	18	17	14	10	19	17	14	10	18	17	14	10	17	16	13	9	
kW	4.06	4.15	4.28	4.42	4.38	4.47	4.62	4.77	4.66	4.76	4.92	5.08	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.59	5.29	5.41	5.59	5.79	
Amps	15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5	22.6	23.2	24.0	24.9	
Hi PR	254	274	289	302	285	307	324	338	325	349	369	385	370	398	420	438	416	448	473	493	460	495	522	545	
Lo PR	102	108	118	126	107	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	157	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

COOLING DATA — DX13SN0611A\* / CA\*F4961\*6D\*+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1750	MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.6	55.8	59.6	63.8	53.3	54.5	58.2	62.2	50.6	51.7	55.3	59.1	46.9	47.9	51.2	54.7	
		S/T	0.85	0.80	0.65	0.5	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.5	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.6	1.00	0.92	0.75	0.56	
		Δ T	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	25	23	20	16	
	1500	kW	4.06	4.15	4.28	4.4	4.38	4.48	4.62	4.77	4.66	4.76	4.92	5.1	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.6	5.29	5.41	5.59	5.79	
		Amps	15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5	22.6	23.2	24.0	24.9	
		Hi PR	254	274	289	301.6	286	307	324	338	325	349	369	384.9	370	398	420	438	416	448	473	493.1	460	495	522	545	
	2250	Lo PR	102	108	118	125.7	107	114	125	133	112	119	130	138.0	117	125	136	145	123	131	143	152.0	127	135	148	157	
		MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2	
		S/T	0.81	0.76	0.62	0.5	0.84	0.79	0.64	0.48	0.86	0.81	0.66	0.5	0.89	0.83	0.68	0.51	0.92	0.87	0.70	0.5	0.93	0.87	0.71	0.53	
	85	1750	Δ T	28	26	23	18	28	27	23	19	28	27	23	19	28	27	24	19	28	27	23	19	26	25	22	17
			kW	4.03	4.12	4.25	4.4	4.34	4.44	4.58	4.73	4.62	4.72	4.88	5.0	4.86	4.97	5.14	5.31	5.07	5.18	5.36	5.5	5.25	5.37	5.55	5.74
			Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	19.0	19.6	20.4	19.8	20.3	21.0	21.8	21.1	21.6	22.4	23.3	22.4	23.0	23.8	24.7
1500		Hi PR	252	271	286	298.6	283	304	321	335	321	346	365	381.0	366	394	416	434	412	443	468	488.2	455	490	517	539	
		Lo PR	101	107	117	124.5	106	113	123	132	110	118	128	136.7	116	123	135	144	122	129	141	150.5	126	134	146	156	
		MBh	57.6	58.8	62.9	67.2	56.2	57.5	61.4	65.6	54.9	56.1	59.9	64.1	53.6	54.7	58.5	62.5	50.9	52.0	55.6	59.4	47.1	48.2	51.5	55.0	
2250		S/T	0.86	0.81	0.66	0.5	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.6	1.00	0.93	0.76	0.56	
		Δ T	20	19	17	14	21	20	17	14	21	20	17	14	21	20	17	14	21	20	17	14	19	18	16	13	
		kW	4.10	4.18	4.32	4.5	4.42	4.51	4.66	4.81	4.70	4.80	4.96	5.1	4.94	5.06	5.22	5.40	5.16	5.27	5.45	5.6	5.34	5.46	5.64	5.84	
1750		Amps	16.0	16.4	16.9	17.6	17.3	17.7	18.3	19.0	18.8	19.3	20.0	20.7	20.2	20.7	21.4	22.2	21.5	22.1	22.8	23.7	22.8	23.4	24.2	25.2	
		Hi PR	257	277	292	305	288	310	328	342	328	353	373	388.7	373	402	424	443	420	452	477	498.0	464	500	528	550	
		Lo PR	103	109	119	127	108	115	126	134	113	120	131	139.4	118	126	137	146	124	132	144	153.5	128	137	149	159	
85	1750	MBh	56.6	57.7	60.4	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.3	47.2	49.5	52.8	
		S/T	0.85	0.82	0.74	0.60	0.88	0.85	0.77	0.62	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.98	0.94	0.85	0.69	
		Δ T	29	29	27	24	30	29	28	24	30	29	28	24	30	30	28	24	30	29	28	24	28	27	26	22	
	1500	kW	4.06	4.15	4.28	4.42	4.38	4.48	4.62	4.77	4.66	4.76	4.92	5.08	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.59	5.29	5.41	5.59	5.79	
		Amps	15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5	22.6	23.2	24.0	24.9	
		Hi PR	254	274	289	302	286	307	324	338	325	349	369	385	370	398	420	438	416	448	473	493	460	495	522	545	
	2250	Lo PR	102	108	118	126	107	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	157	
		MBh	58.6	59.7	62.5	66.7	57.2	58.3	61.1	65.2	55.9	56.9	59.6	63.6	54.5	55.6	58.2	62.1	51.8	52.8	55.3	59.0	48.0	48.9	51.2	54.6	
		S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73	
	1750	Δ T	22	21	20	17	22	22	20	18	22	22	20	18	22	22	21	18	21	21	20	18	20	20	19	16	
		kW	4.13	4.22	4.35	4.49	4.45	4.55	4.70	4.85	4.74	4.84	5.00	5.17	4.99	5.10	5.27	5.45	5.20	5.32	5.49	5.68	5.38	5.51	5.69	5.89	
		Amps	16.1	16.5	17.1	17.7	17.5	17.9	18.5	19.2	19.0	19.5	20.2	20.9	20.4	20.9	21.6	22.4	21.7	22.3	23.0	23.9	23.0	23.6	24.4	25.4	
2250	Hi PR	260	279	295	308	291	313	331	345	331	356	376	393	377	406	429	447	424	457	482	503	469	505	533	556		
	Lo PR	104	110	120	128	110	117	127	135	114	121	132	141	120	127	139	148	125	133	146	155	130	138	151	160		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0181A*	ACNF18XX16D*		16,800	12,200	13.00	10.80	600	6524085
	ACNF24XX16D*		17,000	12,400	13.00	10.80	600	6524087
	ARPT18B14A*		17,400	12,700	13.00	11.00	600	6524089
	ARPT24B14A*		17,200	12,500	13.00	11.00	600	6524091
	ARUF18B14A*		17,200	12,500	13.00	11.00	600	6524093
	ARUF18B14A*+TXV		17,200	12,500	13.00	11.00	600	6524095
	ARUF24B14C*		17,200	13,100	13.00	11.00	600	7084861
	ARUF24B14C*+TXV		17,200	13,100	13.50	11.00	600	7084862
	ASPT24B14A*		17,600	12,800	14.00	12.00	605	6524107
	ASPT30C14A*		18,000	13,100	14.50	12.50	580	6524109
	ASUF29B14A*		17,600	12,800	13.50	11.50	605	6524111
	ASUF29B14A*+TXV		17,600	12,800	14.00	12.00	605	6524113
	AVPTC24B14A*		17,600	12,800	14.00	12.00	600	6524117
	AVPTC30C14A*		18,000	13,100	14.50	12.00	615	6524121
	AWUF18XX16B*		17,400	12,700	13.00	11.00	650	6524125
	AWUF31XX16A*		17,400	12,700	14.00	11.50	600	6524127
	CA*F1824*6D*	D*96MC0603BXA*	18,000	13,100	14.00	11.50	670	6591896
	CA*F1824*6D*	G*VM960603BxB*	18,000	13,100	14.00	11.50	670	6524216
	CA*F1824*6D*	G*VC80604B*B*	17,700	12,900	14.00	11.60	620	6524205
	CA*F1824*6D*	G*VC950453BxB*	17,800	13,000	14.00	11.50	640	6524209
	CA*F1824*6D*	G*E80603B*B*	17,800	13,000	14.00	11.50	640	6524201
	CA*F1824*6D*	D*80VC0604B*A*	17,700	12,900	14.00	11.60	620	6524229
	CA*F1824*6D*	D*80HE0603B*A*	17,800	13,000	14.00	11.50	640	6524225
	CA*F1824*6D*	D*96VC0453BXA*	17,800	13,000	14.00	11.50	640	6524233
	CA*F1824*6D*	D*96VC0704CXA*	17,800	13,000	14.00	11.50	640	6524237
	CA*F1824*6D*	D*96HE0403BXA*	18,000	13,100	14.00	11.60	600	6524245
	CA*F1824*6D*	G*VC950704CXB*	17,800	13,000	14.00	11.50	640	6524213
	CA*F1824*6D*	GME950403BXA*	18,000	13,100	14.00	11.60	600	6524221
	CA*F1824*6D*+EEP		17,800	13,000	13.00	11.00	600	6524129
	CA*F1824*6D*+MBVC1200**-1A*		18,200	13,300	14.00	11.50	640	6524131
	CA*F3030*6D*+EEP		18,000	13,100	13.00	11.00	650	6524133
	CA*F3030*6D*+EEP+TXV		18,000	13,100	13.00	11.00	650	6524135
	CA*F3131*6D*+EEP		18,000	13,100	13.00	11.00	650	6524137
	CA*F3131*6D*+EEP+TXV		18,000	13,100	13.00	11.00	650	6524139
	CAPT3131*4A*	D*96VC0714CXA*	18,000	13,100	14.00	11.50	600	6524239
	CAPT3131*4A*	G*VC950714CXB*	18,000	13,100	14.00	11.50	600	6524215
	CAPT3131*4A*	G*VM960604CXB*	18,000	13,100	14.00	11.50	600	6524220
	CAPT3131*4A*	G*VC80604B*B*	18,000	13,100	14.00	11.50	620	6524206
	CAPT3131*4A*	D*80VC0604B*A*	18,000	13,100	14.00	11.50	620	6524230
	CAPT3131*4A*	G*VC950453BxB*	18,000	13,100	14.00	11.50	650	6524210
	CAPT3131*4A*	D*96HE0603BXA*	18,000	13,100	14.00	11.50	600	6524248
	CAPT3131*4A*	D*96VC0453BXA*	18,000	13,100	14.00	11.50	650	6524234
	CAPT3131*4A*	D*96MC0604CXA*	18,000	13,100	14.00	11.50	600	6591375
	CAPT3131*4A*	DD80VC0603B*A*	18,000	13,100	14.00	11.50	675	6525008
	CAPT3131*4A*	GME950603BXA*	18,000	13,100	14.00	11.50	600	6524224
	CAPT3131*4A*	GME950403BXA*	18,000	13,100	14.00	11.50	600	6524222
	CAPT3131*4A*	G*VC950704CXB*	18,000	13,100	14.00	11.50	600	6524214
	CAPT3131*4A*	D*80HE0603B*A*	18,000	13,100	14.00	11.50	600	6524226
	CAPT3131*4A*	G*E80603B*B*	18,000	13,100	14.00	11.50	600	6524202
	CAPT3131*4A*	D*96MC0603BXA*	18,000	13,100	14.00	11.50	625	6591372
CAPT3131*4A*	G*VM960603BxB*	18,000	13,100	14.00	11.50	625	6524217	
CAPT3131*4A*	D*96HE0403BXA*	18,000	13,100	14.00	11.50	600	6524246	
CAPT3131*4A*	D*96VC0704CXA*	18,000	13,100	14.00	11.50	600	6524238	

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0181A*	CAPT3131*4A*+EEP		18,000	13,100	13.00	11.00	600	6524141
	CAPT3131*4A*+MBVC1200**-1A*		18,000	13,100	14.00	11.50	600	6524143
	CHPF1824A6C*+EEP		18,000	13,100	13.00	11.00	600	6524145
	CHPF2430B6C*	D*80HE0603B*A*	18,000	13,100	14.00	11.50	640	6524227
	CHPF2430B6C*	GME950403BXA*	18,400	13,400	14.00	11.60	600	6524223
	CHPF2430B6C*	G*VC950453BxB*	18,200	13,300	14.00	11.50	650	6524211
	CHPF2430B6C*	G*E80603B*B*	18,000	13,100	14.00	11.50	640	6524203
	CHPF2430B6C*	G*VC80604B*B*	17,700	12,900	14.00	11.50	660	6524207
	CHPF2430B6C*	D*96MC0603BXA*	18,200	13,300	14.00	11.50	675	6591373
	CHPF2430B6C*	D*80VC0604B*A*	17,700	12,900	14.00	11.50	660	6524231
	CHPF2430B6C*	D*96HE0403BXA*	18,400	13,400	14.00	11.60	600	6524247
	CHPF2430B6C*	D*96VC0453BXA*	18,200	13,300	14.00	11.50	650	6524235
	CHPF2430B6C*	G*VM960603BxB*	18,200	13,300	14.00	11.50	675	6524218
	CHPF2430B6C*+EEP		18,000	13,100	13.00	11.00	600	6524147
	CHPF2430B6C*+MBVC1200**-1A*		18,200	13,300	14.00	11.50	650	6524149
	CSCF1824N6D*	G*VC80604B*B*	17,700	12,900	14.00	11.50	660	6524208
	CSCF1824N6D*	D*96VC0453BXA*	18,200	13,300	14.00	11.50	650	6524236
	CSCF1824N6D*	G*E80603B*B*	18,000	13,100	14.00	11.50	640	6524204
	CSCF1824N6D*	G*VM960603BxB*	18,200	13,300	14.00	11.50	670	6524219
	CSCF1824N6D*	D*96MC0603BXA*	18,200	13,300	14.00	11.50	670	6591374
CSCF1824N6D*	D*80HE0603B*A*	18,000	13,100	14.00	11.50	640	6524228	
CSCF1824N6D*	D*80VC0604B*A*	17,700	12,900	14.00	11.50	660	6524232	
CSCF1824N6D*	G*VC950453BxB*	18,200	13,300	14.00	11.50	650	6524212	
CSCF1824N6D*+EEP		18,000	13,100	13.00	11.00	600	6524151	
DV24PTCB14A*		17,600	12,800	14.00	12.00	600	6524118	
DV30PTCC14A*		18,000	13,100	14.50	12.00	615	6524122	
DX13SN 0241A*	ACNF24XX16D*		22,400	16,600	13.00	11.00	770	6525009
	ACNF30XX16D*		22,600	16,700	13.00	11.00	845	6525011
	ARPT24B14A*		22,400	16,600	13.00	11.00	800	6525013
	ARUF24B14C*		22,000	16,200	13.00	11.00	800	7084869
	ARUF24B14C*+TXV		22,000	16,200	13.00	11.00	800	7084870
	ASPT24B14A*		23,000	17,000	13.80	11.80	810	6525025
	ASPT30C14A*		23,400	17,300	14.00	12.00	845	6525027
	ASUF29B14A*		23,000	17,000	13.50	11.50	810	6525029
	ASUF29B14A*+TXV		23,000	17,000	13.80	11.80	810	6525031
	AVPTC24B14A*		22,600	16,700	14.00	12.00	800	6525035
	AVPTC30C14A*		23,400	17,300	14.00	12.00	780	6525039
	AWUF24XX16B*		23,000	17,000	13.00	11.00	800	6525043
	AWUF30XX16B*		23,200	17,200	13.00	11.00	800	6525045
	AWUF31XX16A*		23,000	17,000	14.00	11.30	800	6525047
	AWUF32XX16A*		23,000	17,000	14.00	11.30	800	6525049
	CA*F1824*6D*	D*80VC0604B*A*	23,000	17,000	14.00	11.60	820	6525144
	CA*F1824*6D*	D*96HE0603BXA*	22,800	16,900	13.80	11.50	800	6525159
	CA*F1824*6D*	G*VC80604B*B*	23,000	17,000	14.00	11.60	820	6525124
	CA*F1824*6D*	D*96VC0453BXA*	23,000	17,000	14.00	11.50	800	6525146
	CA*F1824*6D*	G*VC950704CXB*	23,000	17,000	14.00	11.50	800	6525129
	CA*F1824*6D*	G*VC950453BxB*	23,000	17,000	14.00	11.50	800	6525126
	CA*F1824*6D*	G*E80603B*B*	23,000	17,000	14.00	11.50	860	6525121
	CA*F1824*6D*	GME950403BXA*	23,000	17,000	14.00	11.60	800	6525136
	CA*F1824*6D*	D*96VC0704CXA*	23,000	17,000	14.00	11.50	800	6525149
	CA*F1824*6D*	G*VM960603BxB*	23,000	17,000	14.00	11.50	800	6525132
	CA*F1824*6D*	D*96MC0603BXA*	23,000	17,000	14.00	11.50	800	6591545
	CA*F1824*6D*	D*96HE0403BXA*	23,000	17,000	14.00	11.60	800	6525156

See Notes on Page 37.



Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0241A*	CA*F1824*6D*	D*80HE0603B*A*	23,000	17,000	14.00	11.50	860	6525141
	CA*F1824*6D*	GME950603BXA*	22,800	16,900	13.80	11.50	800	6525139
	CA*F1824*6D*+EEP		23,000	17,000	13.00	11.00	800	6525051
	CA*F1824*6D*+MBVC1200**-1A*		23,000	17,000	14.00	11.50	800	6525053
	CA*F3030*6D*+EEP		23,000	17,000	13.00	11.00	800	6525055
	CA*F3030*6D*+EEP+TXV		23,000	17,000	13.00	11.00	800	6525057
	CA*F3131*6D*+EEP		23,000	17,000	13.00	11.00	800	6525059
	CA*F3131*6D*+EEP+TXV		23,000	17,000	13.00	11.00	800	6525061
	CA*F3636*6D*+EEP		23,000	17,000	13.00	11.00	800	6525063
	CA*F3636*6D*+EEP+TXV		23,000	17,000	13.00	11.00	800	6525065
	CAPT3131*4A*	G*VM960603BXB*	23,000	17,000	14.00	11.50	820	6525133
	CAPT3131*4A*	G*E80603B*B*	23,000	17,000	14.00	11.50	800	6525122
	CAPT3131*4A*	G*VC950714CXB*	23,000	17,000	14.00	11.50	800	6525131
	CAPT3131*4A*	G*VC80604B*B*	23,000	17,000	14.00	11.50	830	6525125
	CAPT3131*4A*	GME950403BXA*	23,000	17,000	14.00	11.50	800	6525137
	CAPT3131*4A*	G*VM960604CXB*	23,000	17,000	14.00	11.50	800	6525135
	CAPT3131*4A*	D*96VC0453BXA*	23,000	17,000	14.00	11.50	800	6525147
	CAPT3131*4A*	GME950603BXA*	23,000	17,000	14.00	11.50	800	6525140
	CAPT3131*4A*	D*96VC0704CXA*	23,000	17,000	14.00	11.50	800	6525150
	CAPT3131*4A*	D*96MC0604CXA*	23,000	17,000	14.00	11.50	800	6591549
	CAPT3131*4A*	D*80HE0603B*A*	23,000	17,000	14.00	11.50	800	6525142
	CAPT3131*4A*	D*96HE0403BXA*	23,000	17,000	14.00	11.50	800	6525157
	CAPT3131*4A*	G*VC950704CXB*	23,000	17,000	14.00	11.50	800	6525130
	CAPT3131*4A*	D*96MC0603BXA*	23,000	17,000	14.00	11.50	820	6591546
	CAPT3131*4A*	D*80VC0604B*A*	23,000	17,000	14.00	11.50	830	6525145
	CAPT3131*4A*	D*96HE0603BXA*	23,000	17,000	14.00	11.50	800	6525160
	CAPT3131*4A*	D*96VC0714CXA*	23,000	17,000	14.00	11.50	800	6525151
	CAPT3131*4A*	G*VC950453BXB*	23,000	17,000	14.00	11.50	800	6525127
	CAPT3131*4A*	DD80VC0603B*A*	23,000	17,000	14.00	11.50	800	6525120
	CAPT3131*4A*+EEP		22,800	16,900	13.00	11.00	800	6525067
	CAPT3131*4A*+MBVC1200**-1A*		22,800	16,900	14.00	11.50	800	6525069
	CHPF1824A6C*+EEP		23,000	17,000	13.00	11.00	800	6525071
	CHPF2430B6C*	D*96MC0603BXA*	23,400	17,300	14.00	11.50	800	6591548
	CHPF2430B6C*	G*VC950453BXB*	23,400	17,300	14.00	11.50	800	6525128
	CHPF2430B6C*	GME950403BXA*	23,400	17,300	14.00	11.60	800	6525138
	CHPF2430B6C*	D*96HE0403BXA*	23,400	17,300	14.00	11.60	800	6525158
	CHPF2430B6C*	D*80HE0603B*A*	23,000	17,000	14.00	11.50	860	6525143
	CHPF2430B6C*	G*E80603B*B*	23,000	17,000	14.00	11.50	860	6525123
	CHPF2430B6C*	D*96VC0453BXA*	23,400	17,300	14.00	11.50	800	6525148
	CHPF2430B6C*	G*VM960603BXB*	23,400	17,300	14.00	11.50	800	6525134
CHPF2430B6C*+EEP		23,000	17,000	13.00	11.00	800	6525073	
CHPF2430B6C*+MBVC1200**-1A*		23,400	17,300	14.00	11.50	800	6525075	
CSCF1824N6D*+EEP		23,000	17,000	13.00	11.00	800	6525077	
DV24PTCB14A*		22,600	16,700	14.00	12.00	800	6525036	
DV30PTCC14A*		23,400	17,300	14.00	12.00	780	6525040	
DX13SN 0301A*	ACNF30XX16D*		27,600	20,800	13.00	11.00	890	6525161
	ARPT30B14A*		27,000	20,400	13.00	11.00	900	6525163
	ARUF30B14A*		27,000	20,400	13.00	11.00	900	6525165
	ARUF30B14A*+TXV		27,000	20,400	13.00	11.00	900	6525167
	ARUF36C14B*		27,200	20,600	13.00	11.00	1,000	6525169
	ARUF36C14B*+TXV		27,200	20,600	13.50	11.50	1,000	6525171
	ASPT36C14A*		28,000	21,200	14.00	12.00	1,010	6525175
	ASUF29B14A*		26,000	19,600	13.30	11.30	975	6525177

See Notes on Page 37.



Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0301A*	ASUF39C14A*		28,000	21,200	13.50	11.50	1,005	6525179
	ASUF39C14A*+TXV		28,000	21,200	14.00	12.00	1,005	6525181
	AVPTC36C14A*		28,000	21,200	14.00	12.00	1,015	6525186
	AWUF30XX16B*		27,600	20,800	13.00	11.00	1,000	6525189
	AWUF36XX16B*		27,800	21,000	13.00	11.00	1,000	6525191
	AWUF37XX16B*		28,000	21,200	13.00	11.00	1,000	6525193
	CA*F3030*6D*	D*96HE0403BXA*	28,400	21,400	14.00	11.50	1,000	6712134
	CA*F3030*6D*	D*80VC0604B*A*	28,200	21,200	13.50	11.30	1,050	6525331
	CA*F3030*6D*	G*VC950453BXB*	28,400	21,400	14.00	11.50	1,000	6525301
	CA*F3030*6D*	DD80VC0603B*A*	28,000	21,200	13.50	11.30	1,050	6525370
	CA*F3030*6D*	GME950403BXA*	28,400	21,400	14.00	11.50	1,000	6712144
	CA*F3030*6D*	GME950603BXA*	28,200	21,200	13.50	11.30	1,000	6712150
	CA*F3030*6D*	D*96MC0604CXA*	28,400	21,400	14.00	11.50	1,000	6591571
	CA*F3030*6D*	G*VC950714CXB*	28,400	21,400	14.00	11.50	1,000	6525309
	CA*F3030*6D*	D*96HE0603BXA*	28,200	21,200	13.50	11.30	1,000	6712140
	CA*F3030*6D*	D*96VC0704CXA*	28,400	21,400	14.00	11.50	1,000	6525341
	CA*F3030*6D*	G*VC950704CXB*	28,400	21,400	14.00	11.50	1,000	6525306
	CA*F3030*6D*	G*VM960603BXB*	28,400	21,400	14.00	11.50	1,000	6525316
	CA*F3030*6D*	D*96VC0714CXA*	28,400	21,400	14.00	11.50	1,000	6525344
	CA*F3030*6D*	D*96VC0453BXA*	28,400	21,400	14.00	11.50	1,000	6525336
	CA*F3030*6D*	G*VC80604B*B*	28,200	21,200	13.50	11.30	1,050	6525296
	CA*F3030*6D*	D*96MC0603BXA*	28,400	21,400	14.00	11.50	1,000	6591566
	CA*F3030*6D*	G*VM960604CXB*	28,400	21,400	14.00	11.50	1,000	6525320
	CA*F3030*6D*+EEP		28,400	21,400	13.00	11.00	1,050	6525195
	CA*F3131*6D*	G*VC950714CXB*	28,600	21,600	14.00	11.50	1,050	6525310
	CA*F3131*6D*	G*VM960604CXB*	28,600	21,600	14.00	11.50	1,050	6525321
	CA*F3131*6D*	D*96MC0603BXA*	28,600	21,600	14.00	11.50	1,000	6591567
	CA*F3131*6D*	DD80VC0603B*A*	28,000	21,200	13.50	11.50	1,050	6525371
	CA*F3131*6D*	D*96MC0604CXA*	28,600	21,600	14.00	11.50	1,050	6591573
	CA*F3131*6D*	GME950603BXA*	28,400	21,400	13.50	11.30	1,000	6712152
	CA*F3131*6D*	D*96VC0714CXA*	28,600	21,600	14.00	11.50	1,050	6525345
	CA*F3131*6D*	D*96HE0603BXA*	28,400	21,400	13.50	11.30	1,000	6712142
	CA*F3131*6D*	G*VC950704CXB*	28,400	21,400	14.00	11.50	900	6525307
	CA*F3131*6D*	D*96VC0453BXA*	28,600	21,600	14.00	11.50	1,000	6525337
	CA*F3131*6D*	GME950403BXA*	28,600	21,600	14.00	11.50	1,000	6712146
	CA*F3131*6D*	D*80VC0604B*A*	28,200	21,200	13.50	11.50	1,050	6525332
	CA*F3131*6D*	D*96VC0704CXA*	28,400	21,400	14.00	11.50	900	6525342
	CA*F3131*6D*	D*96HE0403BXA*	28,600	21,600	14.00	11.50	1,000	6712136
	CA*F3131*6D*	G*VC80604B*B*	28,200	21,200	13.50	11.50	1,050	6525297
	CA*F3131*6D*	G*VM960603BXB*	28,600	21,600	14.00	11.50	1,000	6525317
	CA*F3131*6D*	G*VC950453BXB*	28,600	21,600	14.00	11.50	1,000	6525302
	CA*F3131*6D*+EEP		28,600	21,600	13.00	11.00	1,050	6525197
	CA*F3131*6D*+MBVC1200*-1A*		28,400	21,400	14.00	11.50	950	6525199
	CA*F3636*6D*+EEP		28,400	21,400	13.00	11.00	1,000	6525201
	CA*F3636*6D*+EEP+TXV		28,400	21,400	13.00	11.00	1,000	6525203
	CA*F3642*6D*+EEP		28,400	21,400	13.00	11.00	1,000	6525205
	CA*F3642*6D*+EEP+TXV		28,400	21,400	13.00	11.00	1,000	6525207
	CA*F3743*6D*+EEP		28,400	21,400	13.50	11.00	1,000	6525209
	CA*F3743*6D*+EEP+TXV		28,400	21,400	13.50	11.00	1,000	6525211
	CAPT3743*4A*	D*96HE0603BXA*	28,200	21,200	13.50	11.50	1,000	6525364
CAPT3743*4A*	D*96MC0805DXA*	28,200	21,200	14.00	12.00	1,000	6591578	
CAPT3743*4A*	G*VM961005DXB*	28,200	21,200	14.00	12.00	980	6525326	
CAPT3743*4A*	D*96VC0704CXA*	28,200	21,200	13.50	11.50	1,020	6525343	

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #	
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
DX13SN 0301A*	CAPT3743*4A*	G*VM960604CXB*	28,200	21,200	13.50	11.50	1,040	6525322	
	CAPT3743*4A*	D*96MC0805CXA*	28,200	21,200	14.00	12.00	985	6591576	
	CAPT3743*4A*	D*96MC0603BXA*	28,200	21,200	13.50	11.50	1,010	6591569	
	CAPT3743*4A*	G*VC81005C*B*	28,200	21,200	14.00	12.00	1,000	6525300	
	CAPT3743*4A*	G*VM960805DXB*	28,200	21,200	14.00	12.00	1,000	6525325	
	CAPT3743*4A*	D*80HE0603B*A*	28,200	21,200	13.50	11.50	1,050	6525330	
	CAPT3743*4A*	G*VC950714CXB*	28,200	21,200	13.50	11.50	1,050	6525311	
	CAPT3743*4A*	D*96VC0714CXA*	28,200	21,200	13.50	11.50	1,050	6525346	
	CAPT3743*4A*	G*VC950704CXB*	28,200	21,200	13.50	11.50	1,020	6525308	
	CAPT3743*4A*	D*96HE0403BXA*	28,200	21,200	13.50	11.50	1,000	6525363	
	CAPT3743*4A*	D*96VC1155DXA*	28,200	21,200	14.00	12.00	1,005	6525350	
	CAPT3743*4A*	G*VM961155DXB*	28,200	21,200	14.00	12.00	1,000	6525327	
	CAPT3743*4A*	GME950603BXA*	28,200	21,200	13.50	11.50	1,000	6525329	
	CAPT3743*4A*	G*VC951155DXB*	28,200	21,200	14.00	12.00	1,005	6525315	
	CAPT3743*4A*	D*80VC0604B*A*	28,200	21,200	14.00	12.00	1,000	6525333	
	CAPT3743*4A*	D*96MC1155DXA*	28,200	21,200	14.00	12.00	1,000	6591581	
	CAPT3743*4A*	G*VM960603BXB*	28,200	21,200	13.50	11.50	1,010	6525318	
	CAPT3743*4A*	GME950403BXA*	28,200	21,200	13.50	11.50	1,000	6525328	
	CAPT3743*4A*	D*96VC0915DXA*	28,200	21,200	14.00	12.00	1,005	6525349	
	CAPT3743*4A*	G*VC950905CXB*	28,200	21,200	14.00	12.00	985	6525312	
	CAPT3743*4A*	G*VC950905DXB*	28,200	21,200	14.00	12.00	985	6525313	
	CAPT3743*4A*	G*E80603B*B*	28,200	21,200	13.50	11.50	1,050	6525295	
	CAPT3743*4A*	G*VC80805C*B*	28,200	21,200	14.00	12.00	980	6525299	
	CAPT3743*4A*	G*VC80604B*B*	28,200	21,200	14.00	12.00	1,000	6525298	
	CAPT3743*4A*	D*80VC0805C*A*	28,200	21,200	14.00	12.00	980	6525334	
	CAPT3743*4A*	D*96MC0604CXA*	28,200	21,200	13.50	11.50	1,040	6591574	
	CAPT3743*4A*	DD80VC0805C*A*	28,000	21,200	14.00	12.00	990	6525373	
	CAPT3743*4A*	D*96MC1005DXA*	28,200	21,200	14.00	12.00	980	6591580	
	CAPT3743*4A*	DD80VC1005C*A*	28,000	21,200	14.00	12.00	1,010	6525374	
	CAPT3743*4A*	D*96VC0453BXA*	28,200	21,200	13.50	11.50	1,000	6525338	
	CAPT3743*4A*	G*VC950915DXB*	28,200	21,200	14.00	12.00	1,005	6525314	
	CAPT3743*4A*	DD80VC0603B*A*	28,000	21,200	13.50	11.50	1,000	6525372	
	CAPT3743*4A*	D*80VC1005C*A*	28,200	21,200	14.00	12.00	1,000	6525335	
	CAPT3743*4A*	G*VC950453BXB*	28,200	21,200	13.50	11.50	1,000	6525303	
	CAPT3743*4A*	D*96VC0905DXA*	28,200	21,200	14.00	12.00	985	6525348	
	CAPT3743*4A*	G*VM960805CXB*	28,200	21,200	14.00	12.00	985	6525324	
	CAPT3743*4A*	D*96VC0905CXA*	28,200	21,200	14.00	12.00	985	6525347	
	CAPT3743*4A*+EEP			28,200	21,200	13.00	11.00	1,000	6525213
	CAPT3743*4A*+MBVC1200**-1A*			28,000	21,200	14.00	11.50	900	6525215
	CAPT3743*4A*+MBVC1600**-1A*			28,200	21,200	14.00	11.50	1,000	6525217
	CHPF2430B6C*		G*VM960603BXB*	28,400	21,400	14.00	11.50	1,000	6525319
	CHPF2430B6C*		D*96MC0604CXA*	28,400	21,400	14.00	11.50	1,000	6591575
	CHPF2430B6C*		G*VM960604CXB*	28,400	21,400	14.00	11.50	1,000	6525323
	CHPF2430B6C*		D*96HE0403BXA*	28,400	21,400	14.00	11.50	1,000	6712138
	CHPF2430B6C*		D*96MC0603BXA*	28,400	21,400	14.00	11.50	1,000	6591570
	CHPF2430B6C*		D*96VC0453BXA*	28,400	21,400	14.00	11.50	1,000	6525339
	CHPF2430B6C*		GME950403BXA*	28,400	21,400	14.00	11.50	1,000	6712148
CHPF2430B6C*		G*VC950453BXB*	28,400	21,400	14.00	11.50	1,000	6525304	
CHPF2430B6C*+EEP			28,400	21,400	13.00	11.00	1,050	6525219	
CHPF2430B6C*+MBVC1200**-1A*			28,400	21,400	14.00	11.50	1,050	6525221	
CSCF3036N6D*		G*VC950453BXB*	28,400	21,400	14.00	11.30	1,000	6525305	
CSCF3036N6D*		D*96VC0453BXA*	28,400	21,400	14.00	11.30	1,000	6525340	
CSCF3036N6D*+EEP			28,400	21,400	13.00	11.00	1,000	6525223	
DV36PTCC14A*			28,000	21,200	14.00	12.00	1,015	6525185	

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0361A*	ARPT36C14A*		33,000	25,800	13.00	11.00	1,150	6525375
	ARPT42D14A*		34,200	26,600	13.50	11.30	1,150	6525377
	ARUF36C14B*		33,000	25,800	13.00	11.00	1,000	6525379
	ARUF36C14B*+TXV		34,000	26,400	13.00	11.00	1,165	6525381
	ARUF42C14A*		34,200	26,600	13.00	11.00	1,150	6525383
	ARUF42C14A*+TXV		34,200	26,600	13.00	11.00	1,150	6525385
	ASPT36C14A*		34,000	26,400	13.80	11.80	1,210	6525389
	ASPT42C14A*		34,000	26,400	14.00	12.00	1,180	7080462
	ASPT42D14A*		34,600	27,000	14.00	12.00	1,280	6525391
	ASUF39C14A*		34,000	26,400	13.50	11.50	1,210	6525393
	ASUF39C14A*+TXV		34,000	26,400	13.80	11.80	1,210	6525395
	AVPTC36C14A*		34,000	26,400	13.80	11.80	1,215	6525400
	AVPTC42D14A*		34,600	27,000	14.00	12.00	1,225	6525404
	AVPTC48C14A*		34,000	26,400	14.00	12.00	1,100	7080463
	AWUF36XX16B*		33,400	26,000	13.00	11.00	1,150	6525407
	AWUF37XX16B*		33,600	26,200	13.00	11.00	1,150	6525409
	CA*F3636*6D*	D*96MC0805DXA*	33,600	26,200	13.50	11.30	1,220	6591629
	CA*F3636*6D*	D*96VC0915DXA*	33,600	26,200	13.50	11.30	1,220	6525640
	CA*F3636*6D*	D*96MC1005DXA*	33,600	26,200	13.50	11.30	1,205	6591634
	CA*F3636*6D*	D*96MC0604CXA*	33,600	26,200	13.50	11.30	1,155	6591618
	CA*F3636*6D*	G*VM960604CXB*	33,600	26,200	13.50	11.30	1,155	6525590
	CA*F3636*6D*	G*VC950905DXB*	33,600	26,200	13.50	11.30	1,150	6525575
	CA*F3636*6D*	D*96MC0805CXA*	33,600	26,200	13.50	11.30	1,150	6591623
	CA*F3636*6D*	D*96MC1155DXA*	33,600	26,200	13.50	11.30	1,205	6591639
	CA*F3636*6D*	G*VM960805CXB*	33,600	26,200	13.50	11.30	1,150	6525595
	CA*F3636*6D*	G*VC950915DXB*	33,600	26,200	13.50	11.30	1,220	6525580
	CA*F3636*6D*	G*VC951155DXB*	33,600	26,200	13.50	11.30	1,205	6525584
	CA*F3636*6D*	G*VM961005DXB*	33,600	26,200	13.50	11.30	1,205	6525605
	CA*F3636*6D*	D*96VC0714CXA*	33,600	26,200	13.50	11.30	1,135	6525626
	CA*F3636*6D*	G*VM961155DXB*	33,600	26,200	13.50	11.30	1,205	6525610
	CA*F3636*6D*	G*VC950905CXB*	33,600	26,200	13.50	11.30	1,150	6525570
	CA*F3636*6D*	D*96VC0905DXA*	33,600	26,200	13.50	11.30	1,150	6525635
	CA*F3636*6D*	G*VC950714CXB*	33,600	26,200	13.50	11.30	1,135	6525566
	CA*F3636*6D*	D*96VC0905CXA*	33,600	26,200	13.50	11.30	1,150	6525630
	CA*F3636*6D*	D*96VC1155DXA*	33,600	26,200	13.50	11.30	1,205	6525644
	CA*F3636*6D*	G*VM960805DXB*	33,600	26,200	13.50	11.30	1,220	6525600
	CA*F3636*6D*+EEP		33,600	26,200	13.00	11.00	1,200	6525411
	CA*F3642*6D*	D*96VC1155DXA*	34,000	26,400	14.00	11.50	1,210	6525645
	CA*F3642*6D*	D*96MC0604CXA*	34,000	26,400	14.00	11.50	1,165	6591619
	CA*F3642*6D*	D*96MC1005DXA*	34,000	26,400	14.00	11.50	1,205	6591635
	CA*F3642*6D*	G*VM960805CXB*	34,000	26,400	14.00	11.50	1,165	6525596
	CA*F3642*6D*	D*96MC0805CXA*	34,000	26,400	14.00	11.50	1,165	6591624
	CA*F3642*6D*	G*VM960604CXB*	34,000	26,400	14.00	11.50	1,165	6525591
	CA*F3642*6D*	G*VM961005DXB*	34,000	26,400	14.00	11.50	1,205	6525606
	CA*F3642*6D*	D*96VC0915DXA*	34,000	26,400	14.00	11.50	1,225	6525641
	CA*F3642*6D*	D*96MC0805DXA*	34,000	26,400	14.00	11.50	1,225	6591630
	CA*F3642*6D*	D*96VC0905CXA*	34,000	26,400	14.00	11.50	1,165	6525631
CA*F3642*6D*	D*96MC1155DXA*	34,000	26,400	14.00	11.50	1,210	6591641	
CA*F3642*6D*	G*VM960805DXB*	34,000	26,400	14.00	11.50	1,225	6525601	
CA*F3642*6D*	G*VC950714CXB*	34,000	26,400	14.00	11.50	1,160	6525567	
CA*F3642*6D*	D*96VC0905DXA*	34,000	26,400	14.00	11.50	1,165	6525636	
CA*F3642*6D*	G*VM961155DXB*	34,000	26,400	14.00	11.50	1,210	6525611	
CA*F3642*6D*	D*96VC0714CXA*	34,000	26,400	14.00	11.50	1,160	6525627	

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0361A*	CA*F3642*6D*	G*VC951155DXB*	34,000	26,400	14.00	11.50	1,210	6525585
	CA*F3642*6D*	G*VC950905DXB*	34,000	26,400	14.00	11.50	1,165	6525576
	CA*F3642*6D*	G*VC950905CXB*	34,000	26,400	14.00	11.50	1,165	6525571
	CA*F3642*6D*	G*VC950915DXB*	34,000	26,400	14.00	11.50	1,225	6525581
	CA*F3642*6D*+EEP		33,600	26,200	13.00	11.00	1,200	6525413
	CA*F3642*6D*+MBVC1600**-1A*		34,000	26,400	14.00	11.50	1,200	6525415
	CA*F3743*6D*	G*VM961155DXB*	34,000	26,400	14.00	11.50	1,210	6525612
	CA*F3743*6D*	D*96VC0905DXA*	34,000	26,400	14.00	11.50	1,090	6525637
	CA*F3743*6D*	G*VM961005DXB*	34,000	26,400	14.00	11.50	1,210	6525607
	CA*F3743*6D*	D*96VC0915DXA*	34,000	26,400	14.00	11.50	1,225	6525642
	CA*F3743*6D*	D*96MC1155DXA*	34,000	26,400	14.00	11.50	1,210	6591642
	CA*F3743*6D*	D*96MC1005DXA*	34,000	26,400	14.00	11.50	1,210	6591636
	CA*F3743*6D*	D*96MC0805CXA*	34,000	26,400	14.00	11.50	1,185	6591625
	CA*F3743*6D*	D*96MC0604CXA*	34,000	26,400	14.00	11.50	1,170	6591620
	CA*F3743*6D*	G*VM960604CXB*	34,000	26,400	14.00	11.50	1,170	6525592
	CA*F3743*6D*	G*VM960805DXB*	34,000	26,400	14.00	11.50	1,225	6525602
	CA*F3743*6D*	D*96VC0905CXA*	34,000	26,400	14.00	11.50	1,185	6525632
	CA*F3743*6D*	D*96MC0805DXA*	34,000	26,400	14.00	11.50	1,225	6591631
	CA*F3743*6D*	G*VC950714CXB*	34,000	26,400	14.00	11.50	1,165	6525568
	CA*F3743*6D*	D*96VC1155DXA*	34,000	26,400	14.00	11.50	1,210	6525646
	CA*F3743*6D*	D*96VC0714CXA*	34,000	26,400	14.00	11.50	1,165	6525628
	CA*F3743*6D*	G*VC950915DXB*	34,000	26,400	14.00	11.50	1,225	6525582
	CA*F3743*6D*	G*VC950905DXB*	34,000	26,400	14.00	11.50	1,090	6525577
	CA*F3743*6D*	G*VM960805CXB*	34,000	26,400	14.00	11.50	1,185	6525597
	CA*F3743*6D*	G*VC951155DXB*	34,000	26,400	14.00	11.50	1,210	6525586
	CA*F3743*6D*	G*VC950905CXB*	34,000	26,400	14.00	11.50	1,185	6525572
	CA*F3743*6D*+EEP		34,200	26,600	13.00	11.00	1,200	6525417
	CA*F3743*6D*+EEP+TXV		34,200	26,600	13.50	11.00	1,200	6525419
	CA*F3743*6D*+MBVC1600**-1A*		34,000	26,400	14.00	11.50	1,210	6525421
	CAPT3743*4A*	DD80VC1005C*A*	34,000	26,400	13.50	11.50	1,235	6525684
	CAPT3743*4A*	D*96HE0403BXA*	34,000	26,400	13.00	11.00	1,150	6525675
	CAPT3743*4A*	G*VC81005C*B*	34,000	26,400	13.50	11.50	1,210	6525564
	CAPT3743*4A*	D*96MC1155DXA*	34,000	26,400	13.50	11.50	1,200	6591643
	CAPT3743*4A*	D*96HE0805CXA*	33,400	26,000	13.50	11.50	1,090	6525677
	CAPT3743*4A*	G*VM961005DXB*	34,000	26,400	13.50	11.50	1,170	6525608
	CAPT3743*4A*	D*96VC0915DXA*	34,000	26,400	13.50	11.50	1,210	6525643
	CAPT3743*4A*	G*E80603B*B*	34,000	26,400	13.00	11.00	1,150	6525559
	CAPT3743*4A*	D*80VC0805C*A*	34,000	26,400	13.50	11.50	1,190	6525623
	CAPT3743*4A*	G*VC80805C*B*	34,000	26,400	13.50	11.50	1,190	6525563
	CAPT3743*4A*	G*VC950905DXB*	34,000	26,400	13.50	11.50	1,170	6525578
	CAPT3743*4A*	GME950403BXA*	34,000	26,400	13.00	11.00	1,150	6525615
	CAPT3743*4A*	G*VM960805CXB*	34,000	26,400	13.50	11.50	1,175	6525598
CAPT3743*4A*	D*80HE0603B*A*	34,000	26,400	13.00	11.00	1,150	6525619	
CAPT3743*4A*	GME951005DXA*	34,000	26,400	13.50	11.50	1,250	6525618	
CAPT3743*4A*	D*96VC0704CXA*	34,000	26,400	13.00	11.00	1,220	6525625	
CAPT3743*4A*	D*80VC1005C*A*	34,000	26,400	13.50	11.50	1,210	6525624	
CAPT3743*4A*	D*96MC0603BXA*	34,000	26,400	13.00	11.00	1,220	6591617	
CAPT3743*4A*	DD80VC0805C*A*	34,000	26,400	13.50	11.50	1,190	6525683	
CAPT3743*4A*	D*96HE0603BXA*	33,400	26,000	13.00	11.00	1,100	6525676	
CAPT3743*4A*	D*96MC0805CXA*	34,000	26,400	13.50	11.50	1,175	6591627	
CAPT3743*4A*	G*VC80604B*B*	34,000	26,400	13.50	11.50	1,220	6525562	
CAPT3743*4A*	D*96VC0714CXA*	34,000	26,400	13.50	11.50	1,250	6525629	

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #	
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
DX13SN 0361A*	CAPT3743*4A*	D*80HE0805C*A*	34,000	26,400	13.50	11.50	1,210	6525620	
	CAPT3743*4A*	D*96VC1155DXA*	34,000	26,400	13.50	11.50	1,200	6525647	
	CAPT3743*4A*	D*96MC0805DXA*	34,000	26,400	13.50	11.50	1,175	6591632	
	CAPT3743*4A*	GME950805CXA*	33,400	26,000	13.50	11.50	1,090	6525617	
	CAPT3743*4A*	D*96MC1005DXA*	34,000	26,400	13.50	11.50	1,170	6591637	
	CAPT3743*4A*	G*VM961155DXB*	34,000	26,400	13.50	11.50	1,200	6525613	
	CAPT3743*4A*	D*96VC0905CXA*	34,000	26,400	13.50	11.50	1,170	6525633	
	CAPT3743*4A*	G*VC950704CXB*	34,000	26,400	13.00	11.00	1,220	6525565	
	CAPT3743*4A*	DD80VC0603B*A*	34,000	26,400	13.50	11.50	1,165	6525682	
	CAPT3743*4A*	G*VM960603BxB*	34,000	26,400	13.00	11.00	1,220	6525589	
	CAPT3743*4A*	D*96MC0604CXA*	34,000	26,400	13.50	11.50	1,250	6591621	
	CAPT3743*4A*	D*96HE1005DXA*	34,000	26,400	13.50	11.50	1,250	6525678	
	CAPT3743*4A*	G*VC951155DXB*	34,000	26,400	13.50	11.50	1,200	6525587	
	CAPT3743*4A*	GME950603BXA*	33,400	26,000	13.00	11.00	1,100	6525616	
	CAPT3743*4A*	G*VC950905CXB*	34,000	26,400	13.50	11.50	1,170	6525573	
	CAPT3743*4A*	G*VM960805DXB*	34,000	26,400	13.50	11.50	1,175	6525603	
	CAPT3743*4A*	G*E81005C*B*	34,000	26,400	13.50	11.50	1,230	6525561	
	CAPT3743*4A*	D*80VC0604B*A*	34,000	26,400	13.50	11.50	1,220	6525622	
	CAPT3743*4A*	G*VM960604CXB*	34,000	26,400	13.50	11.50	1,250	6525593	
	CAPT3743*4A*	D*96VC0905DXA*	34,000	26,400	13.50	11.50	1,170	6525638	
	CAPT3743*4A*	G*VC950915DXB*	34,000	26,400	13.50	11.50	1,210	6525583	
	CAPT3743*4A*	G*E80805C*B*	34,000	26,400	13.50	11.50	1,210	6525560	
	CAPT3743*4A*	D*80HE1005C*A*	34,000	26,400	13.50	11.50	1,230	6525621	
	CAPT3743*4A*	G*VC950714CXB*	34,000	26,400	13.50	11.50	1,250	6525569	
	CAPT3743*4A*+EEP			34,000	26,400	13.00	11.00	1,200	6525423
	CAPT3743*4A*+MBVC1200**-1A*			34,000	26,400	13.00	11.50	1,200	6525425
	CAPT3743*4A*+MBVC1600**-1A*			34,000	26,400	14.00	11.50	1,205	6525427
	CAPT3743*4A*+MBVC2000**-1A*			34,000	26,400	14.00	11.50	1,205	6525429
	CHPF3636B6C*+EEP			34,000	26,400	13.00	11.00	1,200	6525431
	CHPF3642C6C*+EEP			34,000	26,400	13.00	11.00	1,200	6525433
	CHPF3642C6C*+MBVC1600**-1A*			34,000	26,400	14.00	11.50	1,210	6525435
	CHPF3642D6C*	D*96VC1155DXA*		33,600	26,200	14.00	11.50	1,210	6525648
	CHPF3642D6C*	G*VM961155DXB*		33,600	26,200	14.00	11.50	1,210	6525614
	CHPF3642D6C*	D*96MC0805CXA*		33,600	26,200	14.00	11.50	1,170	6591628
	CHPF3642D6C*	D*96MC1005DXA*		33,600	26,200	14.00	11.50	1,210	6591638
	CHPF3642D6C*	G*VC950905DXB*		33,600	26,200	14.00	11.50	1,105	6525579
	CHPF3642D6C*	D*96VC0905CXA*		33,600	26,200	14.00	11.50	1,170	6525634
	CHPF3642D6C*	G*VC951155DXB*		33,600	26,200	14.00	11.50	1,210	6525588
	CHPF3642D6C*	D*96MC0604CXA*		33,600	26,200	14.00	11.50	1,170	6591622
	CHPF3642D6C*	G*VM960604CXB*		33,600	26,200	14.00	11.50	1,170	6525594
	CHPF3642D6C*	D*96MC0805DXA*		33,600	26,200	14.00	11.50	1,225	6591633
	CHPF3642D6C*	G*VM961005DXB*		33,600	26,200	14.00	11.50	1,210	6525609
	CHPF3642D6C*	G*VM960805CXB*		33,600	26,200	14.00	11.50	1,170	6525599
	CHPF3642D6C*	D*96MC1155DXA*		33,600	26,200	14.00	11.50	1,210	6591644
CHPF3642D6C*	D*96VC0905DXA*		33,600	26,200	14.00	11.50	1,105	6525639	
CHPF3642D6C*	G*VM960805DXB*		33,600	26,200	14.00	11.50	1,225	6525604	
CHPF3642D6C*	G*VC950905CXB*		33,600	26,200	14.00	11.50	1,170	6525574	
CHPF3642D6C*+EEP			34,000	26,400	13.00	11.00	1,200	6525437	
DV36PTCC14A*			34,000	26,400	13.80	11.80	1,215	6525399	
DV42PTCD14A*			34,600	27,000	14.00	12.00	1,225	6525403	
DV48PTCC14A*			34,000	26,400	14.00	12.00	1,100	7080464	

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #	
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
DX13SN 0421A*	ARPT42D14A*		40,000	30,600	13.00	11.00	1,280	6525685	
	ARPT48D14A*		40,500	31,000	13.50	11.50	1,280	6525687	
	ARUF42C14A*		39,500	30,200	13.00	11.00	1,280	6525689	
	ARUF42C14A*+TXV		39,500	30,200	13.00	11.00	1,280	6525691	
	ARUF48D14A*		39,500	30,200	13.00	11.00	1,350	6525693	
	ASPT42D14A*		40,500	31,000	14.00	12.00	1,385	6525697	
	ASPT48C14A*		39,500	30,200	13.50	11.50	1,300	7080474	
	ASUF39C14A*		38,500	29,600	13.50	11.50	1,435	6525699	
	ASUF39C14A*+TXV		38,500	29,600	13.80	11.80	1,435	6525701	
	ASUF49C14A*		39,500	30,200	13.50	11.50	1,310	6525703	
	ASUF49C14A*+TXV		39,500	30,200	13.80	11.70	1,310	6525705	
	AVPTC42D14A*		40,500	31,000	14.00	12.00	1,495	6525710	
	AVPTC48C14A*		39,500	30,200	13.50	11.50	1,300	7080475	
	CA*F3642*6D*	G*E80805C*B*		40,000	30,600	13.00	11.30	1,350	6712188
	CA*F3642*6D*	D*80HE0805C*A*		40,000	30,600	13.00	11.30	1,350	6712153
	CA*F3642*6D*+EEP			40,000	30,600	13.00	11.00	1,400	6525713
	CA*F3642*6D*+EEP+TXV			40,000	30,600	13.00	11.00	1,400	6525715
	CA*F3743*6D*	D*80HE0805C*A*		40,000	30,600	13.00	11.30	1,350	6712154
	CA*F3743*6D*	G*E80805C*B*		40,000	30,600	13.00	11.30	1,350	6712189
	CA*F3743*6D*+EEP			40,000	30,600	13.00	11.00	1,400	6525717
	CA*F4860*6D*	D*96VC0915DXA*		41,000	31,400	14.00	11.50	1,400	6712183
	CA*F4860*6D*	G*VM960604CXB*		41,000	31,400	14.00	11.50	1,400	6712206
	CA*F4860*6D*	D*96HE1005DXA*		40,500	31,000	13.50	11.00	1,440	6712160
	CA*F4860*6D*	D*96HE0805CXA*		40,500	31,000	14.00	11.30	1,400	6712158
	CA*F4860*6D*	GME950805CXA*		40,500	31,000	14.00	11.30	1,400	6712219
	CA*F4860*6D*	D*96VC0905DXA*		41,000	31,400	14.00	11.50	1,400	6712180
	CA*F4860*6D*	G*VC950714CXB*		41,000	31,400	14.00	11.50	1,400	6712194
	CA*F4860*6D*	D*96MC0805CXA*		41,000	31,400	14.00	11.50	1,400	6712165
	CA*F4860*6D*	D*96MC1005DXA*		41,000	31,400	14.00	11.50	1,400	6712171
	CA*F4860*6D*	D*96VC0905CXA*		41,000	31,400	14.00	11.50	1,400	6712176
	CA*F4860*6D*	D*96MC0805DXA*		41,000	31,400	14.00	11.50	1,400	6712168
	CA*F4860*6D*	G*VC950905CXB*		41,000	31,400	14.00	11.50	1,400	6712195
	CA*F4860*6D*	G*VC950915DXB*		41,000	31,400	14.00	11.50	1,400	6712202
	CA*F4860*6D*	G*VM961005DXB*		41,000	31,400	14.00	11.50	1,400	6712215
	CA*F4860*6D*	G*VC950905DXB*		41,000	31,400	14.00	11.50	1,400	6712199
	CA*F4860*6D*	G*VM960805DXB*		41,000	31,400	14.00	11.50	1,400	6712212
	CA*F4860*6D*	D*96MC0604CXA*		41,000	31,400	14.00	11.50	1,400	6712162
	CA*F4860*6D*	G*VC951155DXB*		41,000	31,400	14.00	11.50	1,400	6712203
	CA*F4860*6D*	G*VM960805CXB*		41,000	31,400	14.00	11.50	1,400	6712209
	CA*F4860*6D*	D*96VC1155DXA*		41,000	31,400	14.00	11.50	1,400	6712184
	CA*F4860*6D*	G*VM961155DXB*		41,000	31,400	14.00	11.50	1,400	6712217
	CA*F4860*6D*	D*80HE0805C*A*		41,000	31,400	13.50	11.50	1,510	6712155
	CA*F4860*6D*	D*96VC0714CXA*		41,000	31,400	14.00	11.50	1,400	6712175
	CA*F4860*6D*	G*E80805C*B*		41,000	31,400	13.50	11.50	1,510	6712190
	CA*F4860*6D*	D*96MC1155DXA*		41,000	31,400	14.00	11.50	1,400	6712173
	CA*F4860*6D*	GME951005DXA*		40,500	31,000	13.50	11.00	1,440	6712221
	CA*F4860*6D*+EEP			41,000	31,400	13.00	11.00	1,400	6525719
CA*F4860*6D*+MBVC1600**-1A*			41,000	31,400	14.00	11.50	1,400	6525721	
CA*F4961*6D*+EEP			41,000	31,400	13.00	11.00	1,400	6525723	
CAPT4961*4A*	G*VC950714CXB*		41,000	31,400	14.00	12.00	1,400	6994270	
CAPT4961*4A*	D*96MC1155DXA*		41,000	31,400	14.00	12.00	1,400	6994127	
CAPT4961*4A*	D*80HE0603B*A*		41,000	31,400	13.50	11.50	1,355	6994115	
CAPT4961*4A*	ADVC81005C*B*		41,000	31,400	14.00	12.00	1,405	6994282	

See Notes on Page 37.



Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #	
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
DX13SN 0421A*	CAPT4961*4A*	D*96MC0805DXA*	41,000	31,400	14.00	12.00	1,400	6994125	
	CAPT4961*4A*	D*96VC0905DXA*	41,000	31,400	14.00	12.00	1,400	6994120	
	CAPT4961*4A*	D*96MC0805CXA*	41,000	31,400	14.00	12.00	1,400	6994124	
	CAPT4961*4A*	G*VM960603BxB*	40,500	31,000	13.50	11.50	1,320	6994274	
	CAPT4961*4A*	G*E81005C*B*	41,000	31,400	14.00	12.00	1,300	6994268	
	CAPT4961*4A*	D*96VC0714CXA*	41,000	31,400	14.00	12.00	1,400	6994119	
	CAPT4961*4A*	D*96VC0915DXA*	41,000	31,400	14.00	12.00	1,400	6994121	
	CAPT4961*4A*	G*VM961155DXB*	41,000	31,400	14.00	12.00	1,400	6994278	
	CAPT4961*4A*	DD80VC0805C*A*	41,000	31,400	14.00	12.00	1,380	6994130	
	CAPT4961*4A*	G*VC950704CXB*	41,000	31,400	14.00	12.00	1,400	6994269	
	CAPT4961*4A*	G*E80805C*B*	41,000	31,400	14.00	12.00	1,350	6994267	
	CAPT4961*4A*	G*E80603B*B*	41,000	31,400	13.50	11.50	1,355	6994266	
	CAPT4961*4A*	G*VC950905DXB*	41,000	31,400	14.00	12.00	1,400	6994271	
	CAPT4961*4A*	GME950805CXA*	40,500	31,000	14.00	12.00	1,400	6994279	
	CAPT4961*4A*	G*VC951155DXB*	41,000	31,400	14.00	12.00	1,425	6994273	
	CAPT4961*4A*	DD80VC1005C*A*	41,000	31,400	14.00	12.00	1,405	6994131	
	CAPT4961*4A*	G*VC950915DXB*	41,000	31,400	14.00	12.00	1,400	6994272	
	CAPT4961*4A*	G*VM960805CXB*	41,000	31,400	14.00	12.00	1,400	6994275	
	CAPT4961*4A*	D*80HE1005C*A*	41,000	31,400	14.00	12.00	1,300	6994117	
	CAPT4961*4A*	D*96HE0805CXA*	40,500	31,000	14.00	12.00	1,400	6994128	
	CAPT4961*4A*	D*96MC1005DXA*	41,000	31,400	14.00	12.00	1,400	6994126	
	CAPT4961*4A*	D*80HE0805C*A*	41,000	31,400	14.00	12.00	1,350	6994116	
	CAPT4961*4A*	D*96MC0603BXA*	40,500	31,000	13.50	11.50	1,320	6994123	
	CAPT4961*4A*	D*96VC0704CXA*	41,000	31,400	14.00	12.00	1,400	6994118	
	CAPT4961*4A*	GME951005DXA*	41,000	31,400	14.00	12.00	1,440	6994280	
	CAPT4961*4A*	G*VM961005DXB*	41,000	31,400	14.00	12.00	1,400	6994277	
	CAPT4961*4A*	G*VM960805DXB*	41,000	31,400	14.00	12.00	1,400	6994276	
	CAPT4961*4A*	ADV80805C*B*	41,000	31,400	14.00	12.00	1,380	6994281	
	CAPT4961*4A*	D*96VC1155DXA*	41,000	31,400	14.00	12.00	1,425	6994122	
	CAPT4961*4A*	D*96HE1005DXA*	41,000	31,400	14.00	12.00	1,440	6994129	
	CAPT4961*4A*+EEP			40,500	31,000	13.00	11.00	1,400	6525725
	CAPT4961*4A*+MBVC1600**-1A*			41,000	31,400	14.00	11.50	1,375	6525727
	CAPT4961*4A*+MBVC2000**-1A*			41,000	31,400	14.00	11.50	1,400	6525729
	CHPF3642C6C*		G*E80805C*B*	40,000	30,600	13.00	11.30	1,350	6712192
	CHPF3642C6C*		D*80HE0805C*A*	40,000	30,600	13.00	11.30	1,350	6712156
	CHPF3642C6C*+EEP			40,000	30,600	13.00	11.00	1,400	6525731
	CHPF3642D6C*		D*96MC0805DXA*	40,000	30,600	13.50	11.30	1,400	6712169
	CHPF3642D6C*		D*96MC0604CXA*	40,000	30,600	13.50	11.30	1,400	6712163
	CHPF3642D6C*		D*96VC0905CXA*	40,000	30,600	13.50	11.30	1,400	6712177
	CHPF3642D6C*		D*96VC0905DXA*	40,000	30,600	13.50	11.30	1,400	6712181
	CHPF3642D6C*		G*VC950905CXB*	40,000	30,600	13.50	11.30	1,400	6712196
	CHPF3642D6C*		G*VM960805DXB*	40,000	30,600	13.50	11.30	1,400	6712213
CHPF3642D6C*		G*VM960604CXB*	40,000	30,600	13.50	11.30	1,400	6712207	
CHPF3642D6C*		D*96VC1155DXA*	40,000	30,600	13.50	11.30	1,400	6712185	
CHPF3642D6C*		G*VC91155DXA*	40,000	30,600	13.50	11.30	1,400	6712193	
CHPF3642D6C*		G*VM960805CXB*	40,000	30,600	13.50	11.30	1,400	6712210	
CHPF3642D6C*		D*96MC0805CXA*	40,000	30,600	13.50	11.30	1,400	6712166	
CHPF3642D6C*		G*VC950905DXB*	40,000	30,600	13.50	11.30	1,400	6712200	
CHPF3642D6C*+EEP			40,000	30,600	13.00	11.00	1,400	6525733	
CHPF3743C6B*+EEP			40,000	30,600	13.00	11.00	1,400	6525735	
CHPF4860D6D*		D*96HE1005DXA*	40,500	31,000	13.50	11.00	1,440	6712161	
CHPF4860D6D*		GME951005DXA*	40,500	31,000	13.50	11.00	1,440	6712222	
CHPF4860D6D*		D*96MC1155DXA*	41,000	31,400	14.00	11.50	1,400	6712174	

See Notes on Page 37.



Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0421A*	CHPF4860D6D*	G*VM960805CXB*	41,000	31,400	14.00	11.50	1,400	6712211
	CHPF4860D6D*	D*96VC0905CXA*	41,000	31,400	14.00	11.50	1,400	6712178
	CHPF4860D6D*	D*80HE0805C*A*	41,000	31,400	13.50	11.50	1,510	6712157
	CHPF4860D6D*	D*96MC0805DXA*	41,000	31,400	14.00	11.50	1,400	6712170
	CHPF4860D6D*	G*VM960805DXB*	41,000	31,400	14.00	11.50	1,400	6712214
	CHPF4860D6D*	D*96MC0604CXA*	41,000	31,400	14.00	11.50	1,400	6712164
	CHPF4860D6D*	G*VC950905DXB*	41,000	31,400	14.00	11.50	1,400	6712201
	CHPF4860D6D*	D*96VC0905DXA*	41,000	31,400	14.00	11.50	1,400	6712182
	CHPF4860D6D*	D*96VC1155DXA*	41,000	31,400	14.00	11.50	1,400	6712186
	CHPF4860D6D*	D*96MC1005DXA*	41,000	31,400	14.00	11.50	1,400	6712172
	CHPF4860D6D*	G*VM961155DXB*	41,000	31,400	14.00	11.50	1,400	6712218
	CHPF4860D6D*	D*96MC0805CXA*	41,000	31,400	14.00	11.50	1,400	6712167
	CHPF4860D6D*	G*E80805C*B*	41,000	31,400	13.50	11.50	1,510	6712191
	CHPF4860D6D*	D*96HE0805CXA*	40,500	31,000	14.00	11.30	1,400	6712159
	CHPF4860D6D*	G*VM961005DXB*	41,000	31,400	14.00	11.50	1,400	6712216
	CHPF4860D6D*	G*VM960604CXB*	41,000	31,400	14.00	11.50	1,400	6712208
	CHPF4860D6D*	GME950805CXA*	40,500	31,000	14.00	11.30	1,400	6712220
	CHPF4860D6D*	G*VC951155DXB*	41,000	31,400	14.00	11.50	1,400	6712204
	CHPF4860D6D*	G*VC950905CXB*	41,000	31,400	14.00	11.50	1,400	6712197
	CHPF4860D6D*+EEP		41,000	31,400	13.00	11.00	1,400	6525737
	CHPF4860D6D*+MBVC1600**,-1A*		41,000	31,400	14.00	11.50	1,400	6525739
	CSCF3642N6D*+EEP		40,000	30,600	13.00	11.00	1,325	6525741
	CSCF4860N6D*	D*96VC0905CXA*	41,000	31,400	13.50	11.30	1,450	6712179
	CSCF4860N6D*	G*VC951155DXB*	41,000	31,400	13.50	11.30	1,425	6712205
	CSCF4860N6D*	D*96VC1155DXA*	41,000	31,400	13.50	11.30	1,425	6712187
	CSCF4860N6D*	G*VC950905CXB*	41,000	31,400	13.50	11.30	1,450	6712198
CSCF4860N6D*+EEP		41,000	31,400	13.00	11.00	1,325	6525743	
DV42PTCD14A*		40,500	31,000	14.00	12.00	1,495	6525709	
DV48PTCC14A*		39,500	30,200	13.50	11.50	1,300	7080476	
DX13SN 0481A*	ARPT48D14A*		46,000	35,200	13.50	11.00	1,475	6525816
	ARPT60D14A*		46,000	35,200	13.50	11.00	1,500	6525818
	ARUF48D14A*		44,500	34,200	13.00	11.00	1,550	6525820
	ARUF48D14A*+TXV		44,500	34,200	13.00	11.00	1,550	6525822
	ARUF60D14A*		44,500	34,200	13.00	11.00	1,460	6525824
	ARUF60D14A*+TXV		44,500	34,200	13.00	11.00	1,460	6525826
	ASPT48C14A*		44,000	33,800	13.00	11.00	1,400	7080486
	ASPT48D14A*		46,000	35,200	13.80	11.30	1,600	6525830
	ASPT60D14A*		46,000	35,200	13.80	11.30	1,600	6525832
	ASUF49C14A*		43,000	33,000	13.00	11.00	1,435	6525834
	ASUF49C14A*+TXV		43,000	33,000	13.30	11.00	1,435	6525836
	AVPTC48C14A*		44,000	33,800	13.00	11.00	1,450	7080487
	AVPTC48D14A*		46,000	35,200	13.80	11.30	1,615	6525841
	CA*F4860*6D*+EEP		46,000	35,200	13.00	11.00	1,600	6525844
	CA*F4860*6D*+MBVC2000**,-1A*		46,000	35,200	14.00	11.30	1,600	6525846
	CA*F4860*6D*+TXV	D*96MC1155DXA*	46,000	35,200	14.00	11.30	1,620	6712239
	CA*F4860*6D*+TXV	G*VC950905DXB*	46,000	35,200	14.00	11.30	1,620	6712260
	CA*F4860*6D*+TXV	D*80HE0805C*A*	46,000	35,200	13.50	11.30	1,650	6712223
	CA*F4860*6D*+TXV	D*96MC0805DXA*	46,000	35,200	14.00	11.30	1,620	6712235
	CA*F4860*6D*+TXV	D*96MC0805CXA*	46,000	35,200	14.00	11.30	1,620	6712233
	CA*F4860*6D*+TXV	GME950805CXA*	45,500	34,800	14.00	11.30	1,550	6712277
	CA*F4860*6D*+TXV	D*96VC0905CXA*	46,000	35,200	14.00	11.30	1,620	6712242
	CA*F4860*6D*+TXV	G*VM960604CXB*	46,000	35,200	14.00	11.30	1,620	6712267
	CA*F4860*6D*+TXV	G*VM961155DXB*	46,000	35,200	14.00	11.30	1,620	6712275

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0481A*	CA*F4860*6D*+TXV	G*VC950915DXB*	46,000	35,200	14.00	11.30	1,620	6712263
	CA*F4860*6D*+TXV	D*96MC1005DXA*	46,000	35,200	14.00	11.30	1,620	6712237
	CA*F4860*6D*+TXV	D*96HE1005DXA*	45,500	34,800	13.70	11.30	1,650	6712229
	CA*F4860*6D*+TXV	GME951005DXA*	45,500	34,800	13.70	11.30	1,650	6712279
	CA*F4860*6D*+TXV	D*96VC0905DXA*	46,000	35,200	14.00	11.30	1,620	6712245
	CA*F4860*6D*+TXV	G*E80805C*B*	46,000	35,200	13.50	11.30	1,650	6712252
	CA*F4860*6D*+TXV	D*96MC0604CXA*	46,000	35,200	14.00	11.30	1,620	6712231
	CA*F4860*6D*+TXV	D*96HE0805CXA*	45,500	34,800	14.00	11.30	1,550	6712227
	CA*F4860*6D*+TXV	D*80HE1005C*A*	46,000	35,200	13.50	11.30	1,570	6712225
	CA*F4860*6D*+TXV	D*96VC0714CXA*	46,000	35,200	14.00	11.30	1,620	6712241
	CA*F4860*6D*+TXV	G*VC951155DXB*	46,000	35,200	14.00	11.30	1,620	6712264
	CA*F4860*6D*+TXV	G*VM961005DXB*	46,000	35,200	14.00	11.30	1,620	6712273
	CA*F4860*6D*+TXV	G*E81005C*B*	46,000	35,200	13.50	11.30	1,570	6712254
	CA*F4860*6D*+TXV	G*VM960805DXB*	46,000	35,200	14.00	11.30	1,620	6712271
	CA*F4860*6D*+TXV	G*VM960805CXB*	46,000	35,200	14.00	11.30	1,620	6712269
	CA*F4860*6D*+TXV	G*VC950714CXB*	46,000	35,200	14.00	11.30	1,620	6712256
	CA*F4860*6D*+TXV	D*96VC0915DXA*	46,000	35,200	14.00	11.30	1,620	6712248
	CA*F4860*6D*+TXV	D*96VC1155DXA*	46,000	35,200	14.00	11.30	1,620	6712249
	CA*F4860*6D*+TXV	G*VC950905CXB*	46,000	35,200	14.00	11.30	1,620	6712257
	CAPT4961*4A*	D*96VC0714CXA*	46,000	35,200	13.00	11.00	1,550	6994150
	CAPT4961*4A*	ADVC81005C*B*	47,000	36,000	13.50	11.50	1,620	6994340
	CAPT4961*4A*	G*VM960805CXB*	47,000	36,000	13.00	11.00	1,620	6994334
	CAPT4961*4A*	ADVC80805C*B*	47,000	36,000	13.50	11.50	1,585	6994339
	CAPT4961*4A*	DD80VC0805C*A*	47,000	36,000	13.50	11.50	1,585	6994160
	CAPT4961*4A*	G*E80805C*B*	46,000	35,200	13.50	11.50	1,480	6994326
	CAPT4961*4A*	G*VC950714CXB*	46,000	35,200	13.00	11.00	1,550	6994329
	CAPT4961*4A*	D*96HE0805CXA*	47,000	36,000	13.00	11.00	1,550	6994158
	CAPT4961*4A*	D*96HE1005DXA*	47,000	36,000	13.50	11.50	1,650	6994159
	CAPT4961*4A*	GME950805CXA*	47,000	36,000	13.00	11.00	1,550	6994337
	CAPT4961*4A*	G*VC950704CXB*	47,000	36,000	13.00	11.00	1,650	6994328
	CAPT4961*4A*	D*80HE0805C*A*	46,000	35,200	13.50	11.50	1,480	6994147
	CAPT4961*4A*	D*96MC0805DXA*	47,000	36,000	13.50	11.50	1,620	6994156
	CAPT4961*4A*	G*VC950915DXB*	46,000	35,200	13.50	11.50	1,575	6994332
	CAPT4961*4A*	GME951005DXA*	47,000	36,000	13.50	11.50	1,650	6994338
	CAPT4961*4A*	G*VC950905DXB*	47,000	36,000	13.50	11.50	1,575	6994331
	CAPT4961*4A*	G*VC951155DXB*	47,000	36,000	13.50	11.50	1,550	6994333
	CAPT4961*4A*	D*96VC0905DXA*	47,000	36,000	13.50	11.50	1,575	6994152
	CAPT4961*4A*	G*VC950905CXB*	47,000	36,000	13.00	11.00	1,575	6994330
	CAPT4961*4A*	D*96MC1005DXA*	47,000	36,000	13.00	11.00	1,620	6994157
	CAPT4961*4A*	D*96VC0905CXA*	47,000	36,000	13.00	11.00	1,575	6994151
	CAPT4961*4A*	DD80VC1005C*A*	47,000	36,000	13.50	11.50	1,620	6994161
CAPT4961*4A*	D*96VC0704CXA*	47,000	36,000	13.00	11.00	1,650	6994149	
CAPT4961*4A*	D*80HE1005C*A*	47,000	36,000	13.50	11.50	1,570	6994148	
CAPT4961*4A*	D*96VC0915DXA*	46,000	35,200	13.50	11.50	1,575	6994153	
CAPT4961*4A*	G*VM960805DXB*	47,000	36,000	13.50	11.50	1,620	6994335	
CAPT4961*4A*	D*96MC0805CXA*	47,000	36,000	13.00	11.00	1,620	6994155	
CAPT4961*4A*	G*VM961005DXB*	47,000	36,000	13.00	11.00	1,620	6994336	
CAPT4961*4A*	D*96VC1155DXA*	47,000	36,000	13.50	11.50	1,550	6994154	
CAPT4961*4A*	G*E81005C*B*	47,000	36,000	13.50	11.50	1,570	6994327	
CAPT4961*4A*+EEP			46,500	35,600	13.00	11.00	1,600	6525850
CAPT4961*4A*+MBVC1600**-1A*			47,000	36,000	14.00	11.50	1,500	6525852
CAPT4961*4A*+MBVC2000**-1A*			47,000	36,000	14.00	11.50	1,550	6525854

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0481A*	CHPF4860D6D*+EEP		46,000	35,200	13.00	11.00	1,600	6525856
	CHPF4860D6D*+MBVC2000**-1A*		46,000	35,200	14.00	11.30	1,600	6525858
	CHPF4860D6D*+TXV	G*VM961155DXB*	46,000	35,200	14.00	11.30	1,620	6712276
	CHPF4860D6D*+TXV	G*E80805C*B*	46,000	35,200	13.50	11.30	1,650	6712253
	CHPF4860D6D*+TXV	G*VC950905DXB*	46,000	35,200	14.00	11.30	1,620	6712261
	CHPF4860D6D*+TXV	D*96VC0905DXA*	46,000	35,200	14.00	11.30	1,620	6712246
	CHPF4860D6D*+TXV	GME951005DXA*	45,500	34,800	13.70	11.30	1,650	6712280
	CHPF4860D6D*+TXV	G*VM961005DXB*	46,000	35,200	14.00	11.30	1,620	6712274
	CHPF4860D6D*+TXV	GME950805CXA*	45,500	34,800	14.00	11.30	1,550	6712278
	CHPF4860D6D*+TXV	D*96HE0805CXA*	45,500	34,800	14.00	11.30	1,550	6712228
	CHPF4860D6D*+TXV	D*80HE0805C*A*	46,000	35,200	13.50	11.30	1,650	6712224
	CHPF4860D6D*+TXV	G*VC950905CXB*	46,000	35,200	14.00	11.30	1,620	6712258
	CHPF4860D6D*+TXV	D*96VC1155DXA*	46,000	35,200	14.00	11.30	1,620	6712250
	CHPF4860D6D*+TXV	G*VC951155DXB*	46,000	35,200	14.00	11.30	1,620	6712265
	CHPF4860D6D*+TXV	D*80HE1005C*A*	46,000	35,200	13.50	11.30	1,570	6712226
	CHPF4860D6D*+TXV	D*96MC0604CXA*	46,000	35,200	14.00	11.30	1,620	6712232
	CHPF4860D6D*+TXV	D*96HE1005DXA*	45,500	34,800	13.70	11.30	1,650	6712230
	CHPF4860D6D*+TXV	D*96MC1005DXA*	46,000	35,200	14.00	11.30	1,620	6712238
	CHPF4860D6D*+TXV	D*96MC0805CXA*	46,000	35,200	14.00	11.30	1,620	6712234
	CHPF4860D6D*+TXV	G*E81005C*B*	46,000	35,200	13.50	11.30	1,570	6712255
	CHPF4860D6D*+TXV	D*96MC0805DXA*	46,000	35,200	14.00	11.30	1,620	6712236
	CHPF4860D6D*+TXV	D*96MC1155DXA*	46,000	35,200	14.00	11.30	1,620	6712240
	CHPF4860D6D*+TXV	G*VM960604CXB*	46,000	35,200	14.00	11.30	1,620	6712268
	CHPF4860D6D*+TXV	G*VM960805CXB*	46,000	35,200	14.00	11.30	1,620	6712270
	CHPF4860D6D*+TXV	D*96VC0905CXA*	46,000	35,200	14.00	11.30	1,620	6712243
	CHPF4860D6D*+TXV	G*VM960805DXB*	46,000	35,200	14.00	11.30	1,620	6712272
	CSCF4860N6D*+EEP		46,000	35,200	13.00	11.00	1,600	6525860
	CSCF4860N6D*+TXV	D*96VC0905DXA*	46,000	35,200	14.00	11.30	1,575	6712247
	CSCF4860N6D*+TXV	D*96VC1155DXA*	46,000	35,200	14.00	11.30	1,550	6712251
	CSCF4860N6D*+TXV	G*VC950905CXB*	46,000	35,200	14.00	11.30	1,575	6712259
	CSCF4860N6D*+TXV	G*VC950905DXB*	46,000	35,200	14.00	11.30	1,575	6712262
	CSCF4860N6D*+TXV	G*VC951155DXB*	46,000	35,200	14.00	11.30	1,550	6712266
	CSCF4860N6D*+TXV	D*96VC0905CXA*	46,000	35,200	14.00	11.30	1,575	6712244
DV48PTCC14A*		44,000	33,800	13.00	11.00	1,450	7080488	
DV48PTCD14A*		46,000	35,200	13.80	11.30	1,615	6525840	
DX13SN 0601A*	ASPT60D14A*		56,000	40,000	13.00	11.00	1,700	6525920
	ASUF59D14A*		54,000	38,500	13.00	11.00	1,580	6525922
	AVPTC60D14A*		56,000	40,000	13.00	11.00	1,750	6525925
	CA*F4961*6D*+EEP		55,500	39,500	13.00	11.00	1,650	6525929
	CA*F4961*6D*+MBVC2000**-1A*		56,000	40,000	13.50	11.50	1,650	6525931
	CA*F4961*6D*+MBVC2000**-1A*+TXV		56,000	40,000	13.50	11.50	1,750	6525933
	CA*F4961*6D*+TXV	G*VM960805DXB*	55,000	39,000	13.00	11.00	1,700	6712348
	CA*F4961*6D*+TXV	D*96MC1005DXA*	54,500	38,500	13.40	11.20	1,620	6712300
	CA*F4961*6D*+TXV	D*80HE1005C*A*	55,000	39,000	13.30	11.20	1,720	6712284
	CA*F4961*6D*+TXV	G*VC950905DXB*	55,000	39,000	13.00	11.00	1,700	6712336
	CA*F4961*6D*+TXV	D*96VC0714CXA*	55,000	39,000	13.00	11.00	1,700	6712306
	CA*F4961*6D*+TXV	G*E81005C*B*	55,000	39,000	13.30	11.20	1,720	6712322
	CA*F4961*6D*+TXV	D*96VC0905CXA*	55,000	39,000	13.00	11.00	1,700	6712308
	CA*F4961*6D*+TXV	G*VC950915DXB*	55,000	39,000	13.00	11.00	1,700	6712339
	CA*F4961*6D*+TXV	D*80HE0805C*A*	54,500	38,500	13.30	11.20	1,650	6712281
	CA*F4961*6D*+TXV	D*96VC0905DXA*	55,000	39,000	13.00	11.00	1,700	6712311
	CA*F4961*6D*+TXV	G*VC80805C*B*	55,500	39,500	13.30	11.20	1,700	6712325
	CA*F4961*6D*+TXV	D*96VC0915DXA*	55,000	39,000	13.00	11.00	1,700	6712314

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0601A*	CA*F4961*6D*+TXV	G*VM961005DXB*	54,500	38,500	13.40	11.20	1,620	6712351
	CA*F4961*6D*+TXV	G*E80805C*B*	54,500	38,500	13.30	11.20	1,650	6712319
	CA*F4961*6D*+TXV	G*VC81005C*B*	55,500	39,500	13.30	11.20	1,700	6712328
	CA*F4961*6D*+TXV	D*96MC0805DXA*	55,000	39,000	13.00	11.00	1,700	6712297
	CA*F4961*6D*+TXV	G*VC950714CXB*	55,000	39,000	13.00	11.00	1,700	6712331
	CA*F4961*6D*+TXV	D*80VC0805C*A*	55,500	39,500	13.30	11.20	1,700	6712287
	CA*F4961*6D*+TXV	G*VC951155DXB*	54,500	38,500	13.40	11.20	1,620	6712341
	CA*F4961*6D*+TXV	G*VM960805CXB*	55,000	39,000	13.00	11.00	1,700	6712345
	CA*F4961*6D*+TXV	D*96VC1155DXA*	54,500	38,500	13.40	11.20	1,620	6712316
	CA*F4961*6D*+TXV	D*96MC0805CXA*	55,000	39,000	13.00	11.00	1,700	6712294
	CA*F4961*6D*+TXV	D*96MC1155DXA*	54,500	38,500	13.40	11.20	1,620	6712303
	CA*F4961*6D*+TXV	G*VC950905CXB*	55,000	39,000	13.00	11.00	1,700	6712333
	CA*F4961*6D*+TXV	G*VM961155DXB*	54,500	38,500	13.40	11.20	1,620	6712354
	CA*F4961*6D*+TXV	D*80VC1005C*A*	55,500	39,500	13.30	11.20	1,700	6712290
	CAPT4961*4A*	G*E80805C*B*	54,500	38,500	13.00	11.00	1,675	6712320
	CAPT4961*4A*	G*VC950714CXB*	55,000	39,000	13.00	11.00	1,600	6712332
	CAPT4961*4A*	D*96MC0805DXA*	55,000	39,000	13.00	11.00	1,600	6712298
	CAPT4961*4A*	D*96VC0905DXA*	55,000	39,000	13.00	11.00	1,560	6712312
	CAPT4961*4A*	D*96MC1005DXA*	54,500	38,500	13.00	11.00	1,625	6712301
	CAPT4961*4A*	D*80HE0805C*A*	54,500	38,500	13.00	11.00	1,675	6712282
	CAPT4961*4A*	D*96MC1155DXA*	54,500	38,500	13.00	11.00	1,625	6712304
	CAPT4961*4A*	D*80HE1005C*A*	55,000	39,000	13.00	11.00	1,625	6712285
	CAPT4961*4A*	D*96VC0714CXA*	55,000	39,000	13.00	11.00	1,600	6712307
	CAPT4961*4A*	G*VC81005C*B*	55,500	39,500	13.00	11.00	1,625	6712329
	CAPT4961*4A*	D*80VC1005C*A*	55,500	39,500	13.00	11.00	1,625	6712291
	CAPT4961*4A*	G*VM960805CXB*	55,000	39,000	13.00	11.00	1,600	6712346
	CAPT4961*4A*	G*VC950905DXB*	55,000	39,000	13.00	11.00	1,560	6712337
	CAPT4961*4A*	G*VC950915DXB*	55,000	39,000	13.00	11.00	1,660	6712340
	CAPT4961*4A*	G*VM961005DXB*	54,500	38,500	13.00	11.00	1,625	6712352
	CAPT4961*4A*	DD80VC0805C*A*	55,500	39,500	13.00	11.00	1,625	6526021
	CAPT4961*4A*	G*VC951155DXB*	54,500	38,500	13.00	11.00	1,625	6712342
	CAPT4961*4A*	D*96MC0604CXA*	55,000	39,000	13.00	11.00	1,600	6712293
	CAPT4961*4A*	D*96VC0905CXA*	55,000	39,000	13.00	11.00	1,560	6712309
	CAPT4961*4A*	D*96VC0915DXA*	55,000	39,000	13.00	11.00	1,660	6712315
	CAPT4961*4A*	D*96VC1155DXA*	54,500	38,500	13.00	11.00	1,625	6712317
	CAPT4961*4A*	DD80VC1005C*A*	55,500	39,500	13.00	11.00	1,625	6526022
	CAPT4961*4A*	G*E81005C*B*	55,000	39,000	13.00	11.00	1,625	6712323
	CAPT4961*4A*	G*VM960604CXB*	55,000	39,000	13.00	11.00	1,600	6712344
	CAPT4961*4A*	G*VM960805DXB*	55,000	39,000	13.00	11.00	1,600	6712349
	CAPT4961*4A*	G*VM961155DXB*	54,500	38,500	13.00	11.00	1,625	6712355
	CAPT4961*4A*	G*VC950905CXB*	55,000	39,000	13.00	11.00	1,560	6712334
	CAPT4961*4A*	D*80VC0805C*A*	55,500	39,500	13.00	11.00	1,625	6712288
	CAPT4961*4A*	D*96MC0805CXA*	55,000	39,000	13.00	11.00	1,600	6712295
	CAPT4961*4A*	G*VC80805C*B*	55,500	39,500	13.00	11.00	1,625	6712326
	CAPT4961*4A*+MBVC2000**-1A*			56,000	40,000	13.50	11.50	1,625
CHPF4860D6D*+EEP+TXV			55,500	39,500	13.00	11.00	1,500	6525937
CHPF4860D6D*+TXV	G*VC951155DXB*		55,000	39,000	13.00	11.00	1,620	6712343
CHPF4860D6D*+TXV	D*96VC0905CXA*		55,000	39,000	13.00	11.00	1,700	6712310
CHPF4860D6D*+TXV	D*80VC1005C*A*		55,500	39,500	13.00	11.00	1,800	6712292
CHPF4860D6D*+TXV	G*VC950905CXB*		55,000	39,000	13.00	11.00	1,700	6712335
CHPF4860D6D*+TXV	G*E81005C*B*		55,000	39,000	13.30	11.20	1,720	6712324
CHPF4860D6D*+TXV	D*96VC0905DXA*		55,500	39,500	13.20	11.00	1,700	6712313
CHPF4860D6D*+TXV	G*VC81005C*B*		55,500	39,500	13.00	11.00	1,800	6712330

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0601A*	CHPF4860D6D*+TXV	G*VC950905DXB*	55,500	39,500	13.20	11.00	1,700	6712338
	CHPF4860D6D*+TXV	D*80HE1005C*A*	55,000	39,000	13.30	11.20	1,720	6712286
	CHPF4860D6D*+TXV	D*96MC0805DXA*	56,500	40,000	13.00	11.00	1,700	6712299
	CHPF4860D6D*+TXV	G*VM961155DXB*	55,000	39,000	13.40	11.30	1,620	6712356
	CHPF4860D6D*+TXV	D*80HE0805C*A*	54,500	38,500	13.30	11.20	1,650	6712283
	CHPF4860D6D*+TXV	G*VM960805DXB*	56,500	40,000	13.00	11.00	1,700	6712350
	CHPF4860D6D*+TXV	G*VC80805C*B*	55,500	39,500	13.00	11.00	1,800	6712327
	CHPF4860D6D*+TXV	D*80VC0805C*A*	55,500	39,500	13.00	11.00	1,800	6712289
	CHPF4860D6D*+TXV	D*96MC0805CXA*	55,000	39,000	13.00	11.00	1,700	6712296
	CHPF4860D6D*+TXV	D*96VC1155DXA*	55,000	39,000	13.00	11.00	1,620	6712318
	CHPF4860D6D*+TXV	G*VM961005DXB*	55,000	39,000	13.00	11.00	1,620	6712353
	CHPF4860D6D*+TXV	G*VM960805CXB*	55,000	39,000	13.00	11.00	1,700	6712347
	CHPF4860D6D*+TXV	D*96MC1155DXA*	55,000	39,000	13.40	11.30	1,620	6712305
	CHPF4860D6D*+TXV	D*96MC1005DXA*	55,000	39,000	13.00	11.00	1,620	6712302
	CHPF4860D6D*+TXV	G*E80805C*B*	54,500	38,500	13.30	11.20	1,650	6712321
	CSCF4860N6D*+EEP		54,000	38,500	13.00	11.00	1,600	6525939
	CSCF4860N6D*+MBVC2000**-1A*		53,500	38,000	13.50	11.50	1,650	6525941
DV60PTCD14A*		56,000	40,000	13.00	11.00	1,750	6525924	
DX13SN 0611A*	ARPT48D14A*		54,500	37,400	13.00	11.00	1,500	6526023
	ARPT60D14A*		55,000	37,600	13.00	11.00	1,500	6526025
	ARUF48D14A*		54,500	37,400	13.00	11.00	1,500	6526027
	ARUF60D14A*		55,000	37,600	13.00	11.00	1,500	6526029
	ASPT60D14A*		56,000	38,500	14.00	11.50	1,600	6526033
	ASUF49C14A*		51,500	35,200	13.00	11.00	1,435	6526035
	ASUF49C14A*+TXV		51,500	35,200	13.20	11.00	1,435	6526037
	ASUF59D14A*		56,000	38,500	13.50	11.00	1,580	6526039
	ASUF59D14A*+TXV		56,000	38,500	14.00	11.50	1,600	6526041
	AVPTC60D14A*		56,000	38,500	14.00	11.50	1,620	6526046
	CA*F4860*6D*+EEP		55,000	37,600	13.00	11.00	1,500	6526049
	CA*F4860*6D*+MBVC2000**-1A*		56,000	38,500	13.50	11.50	1,575	6526051
	CA*F4860*6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.00	11.50	1,575	6526053
	CA*F4860*6D*+TXV	D*96VC0915DXA*	55,000	37,600	13.00	11.00	1,575	6526315
	CA*F4860*6D*+TXV	G*VM961005DXB*	55,000	37,600	13.50	11.00	1,550	6526264
	CA*F4860*6D*+TXV	DD80VC0805C*A*	55,500	38,000	13.00	11.00	1,500	6526357
	CA*F4860*6D*+TXV	DD80VC1005C*A*	55,500	38,000	13.00	11.00	1,550	6526360
	CA*F4860*6D*+TXV	G*VC950905CXB*	55,500	38,000	13.00	11.00	1,460	6526237
	CA*F4860*6D*+TXV	D*96VC0905DXA*	55,500	38,000	13.50	11.00	1,460	6526311
	CA*F4860*6D*+TXV	D*80VC1005C*A*	55,500	38,000	13.50	11.00	1,520	6526299
	CA*F4860*6D*+TXV	D*96MC0805DXA*	55,500	38,000	13.00	11.00	1,460	6591733
	CA*F4860*6D*+TXV	D*96HE1005DXA*	55,000	37,600	13.50	11.00	1,500	6526346
	CA*F4860*6D*+TXV	G*VC81005C*B*	55,500	38,000	13.50	11.00	1,520	6526229
	CA*F4860*6D*+TXV	D*96MC0805CXA*	55,500	38,000	13.00	11.00	1,460	6591726
	CA*F4860*6D*+TXV	D*80HE0805C*A*	55,500	38,000	13.00	11.00	1,550	6526284
	CA*F4860*6D*+TXV	D*80VC0805C*A*	55,500	38,000	13.50	11.00	1,520	6526294
	CA*F4860*6D*+TXV	G*VC951155DXB*	55,000	37,600	13.00	11.00	1,550	6526250
	CA*F4860*6D*+TXV	D*96HE0805CXA*	55,000	37,600	13.00	11.00	1,475	6526341
	CA*F4860*6D*+TXV	GME950805CXA*	55,000	37,600	13.00	11.00	1,475	6526274
	CA*F4860*6D*+TXV	D*96VC1155DXA*	55,000	37,600	13.00	11.00	1,550	6526320
	CA*F4860*6D*+TXV	D*80HE1005C*A*	55,000	37,600	13.50	11.00	1,525	6526289
	CA*F4860*6D*+TXV	G*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6526245
	CA*F4860*6D*+TXV	G*VC950905DXB*	55,500	38,000	13.50	11.00	1,460	6526241
	CA*F4860*6D*+TXV	G*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6526269
CA*F4860*6D*+TXV	G*E81005C*B*	55,000	37,600	13.50	11.00	1,525	6526219	

See Notes on Page 37.

Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0611A*	CA*F4860*6D*+TXV	G*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6526259
	CA*F4860*6D*+TXV	G*E80805C*B*	55,500	38,000	13.00	11.00	1,550	6526214
	CA*F4860*6D*+TXV	G*VC80805C*B*	55,500	38,000	13.50	11.00	1,520	6526224
	CA*F4860*6D*+TXV	D*96VC0905CXA*	55,500	38,000	13.00	11.00	1,460	6526307
	CA*F4860*6D*+TXV	G*VM960805CXB*	55,500	38,000	13.00	11.00	1,460	6526254
	CA*F4860*6D*+TXV	GME951005DXA*	55,000	37,600	13.50	11.00	1,500	6526279
	CA*F4860*6D*+TXV	D*96MC1155DXA*	55,000	37,600	13.50	11.00	1,550	6591746
	CA*F4860*6D*+TXV	D*96MC1005DXA*	55,000	37,600	13.50	11.00	1,550	6591739
	CA*F4961*6D*+EEP		56,500	38,500	13.00	11.00	1,500	6526055
	CA*F4961*6D*+MBVC2000**-1A*		57,000	39,000	14.00	11.50	1,575	6526057
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	39,000	14.50	12.00	1,575	6526059
	CA*F4961*6D*+TXV	G*VC950905CXB*	56,500	38,500	13.50	11.00	1,460	6526238
	CA*F4961*6D*+TXV	G*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6526265
	CA*F4961*6D*+TXV	G*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6526230
	CA*F4961*6D*+TXV	DD80VC1005C*A*	57,000	39,000	13.50	11.00	1,550	6526361
	CA*F4961*6D*+TXV	D*96VC0905CXA*	56,500	38,500	13.50	11.00	1,460	6526308
	CA*F4961*6D*+TXV	D*96VC0905DXA*	56,500	38,500	14.00	11.50	1,460	6526312
	CA*F4961*6D*+TXV	D*96MC0805DXA*	56,500	38,500	13.50	11.00	1,460	6591734
	CA*F4961*6D*+TXV	G*VC91155DXA*	56,000	38,500	13.00	11.00	1,550	6526234
	CA*F4961*6D*+TXV	D*80VC0805C*A*	56,500	38,500	14.00	11.50	1,520	6526295
	CA*F4961*6D*+TXV	G*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6526251
	CA*F4961*6D*+TXV	G*VC80805C*B*	56,500	38,500	14.00	11.50	1,520	6526225
	CA*F4961*6D*+TXV	G*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6526255
	CA*F4961*6D*+TXV	D*96VC0915DXA*	56,000	38,500	13.50	11.00	1,575	6526316
	CA*F4961*6D*+TXV	GME951005DXA*	56,000	38,500	14.00	11.50	1,500	6526280
	CA*F4961*6D*+TXV	D*96HE1005DXA*	56,000	38,500	14.00	11.50	1,500	6526347
	CA*F4961*6D*+TXV	G*VC950915DXB*	56,000	38,500	13.50	11.00	1,575	6526246
	CA*F4961*6D*+TXV	G*E80805C*B*	56,000	38,500	14.00	11.50	1,550	6526215
	CA*F4961*6D*+TXV	GME950805CXA*	56,000	38,500	13.50	11.00	1,475	6526275
	CA*F4961*6D*+TXV	G*VM961155DXB*	56,000	38,500	13.50	11.00	1,550	6526270
	CA*F4961*6D*+TXV	D*80HE1005C*A*	56,000	38,500	14.00	11.50	1,525	6526290
	CA*F4961*6D*+TXV	D*80VC1005C*A*	56,500	38,500	14.00	11.50	1,520	6526300
	CA*F4961*6D*+TXV	D*96MC0805CXA*	56,500	38,500	13.50	11.00	1,460	6591728
	CA*F4961*6D*+TXV	D*80HE0805C*A*	56,000	38,500	14.00	11.50	1,550	6526285
	CA*F4961*6D*+TXV	D*96MC1155DXA*	56,000	38,500	13.50	11.00	1,550	6591747
	CA*F4961*6D*+TXV	D*96HE0805CXA*	56,000	38,500	13.50	11.00	1,475	6526342
	CA*F4961*6D*+TXV	G*E81005C*B*	56,000	38,500	14.00	11.50	1,525	6526220
	CA*F4961*6D*+TXV	G*VM960805DXB*	56,500	38,500	13.50	11.00	1,460	6526260
	CA*F4961*6D*+TXV	DD80VC0805C*A*	57,000	39,000	13.50	11.00	1,500	6526358
	CA*F4961*6D*+TXV	D*96VC1155DXA*	56,000	38,500	13.00	11.00	1,550	6526304
	CA*F4961*6D*+TXV	G*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6526242
	CA*F4961*6D*+TXV	D*96MC1005DXA*	56,000	38,500	14.00	11.50	1,550	6591740
	CAPT4961*4A*	D*96VC0704CXA*	57,000	39,000	13.00	11.00	1,450	6994164
	CAPT4961*4A*	G*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6526231
	CAPT4961*4A*	D*80VC1005C*A*	56,500	38,500	14.00	11.50	1,520	6526301
	CAPT4961*4A*	D*96VC0714CXA*	57,000	39,000	13.00	11.00	1,530	6994165
	CAPT4961*4A*	D*80HE0805C*A*	56,000	38,500	14.00	11.50	1,550	6526286
CAPT4961*4A*	D*96VC0905DXA*	56,500	38,500	14.00	11.50	1,460	6526313	
CAPT4961*4A*	D*80HE1005C*A*	56,000	38,500	14.00	11.50	1,525	6526291	
CAPT4961*4A*	D*96MC1155DXA*	56,000	38,500	13.50	11.00	1,550	6591748	
CAPT4961*4A*	G*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6526243	
CAPT4961*4A*	G*E80805C*B*	56,000	38,500	14.00	11.50	1,550	6526216	
CAPT4961*4A*	D*96VC1155DXA*	56,000	38,500	13.50	11.00	1,550	6526305	

See Notes on Page 37.



Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #	
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
DX13SN 0611A*	CAPT4961*4A*	G*VC91155DXA*	56,000	38,500	13.50	11.00	1,550	6526235	
	CAPT4961*4A*	G*VC950714CXB*	57,000	39,000	13.00	11.00	1,530	6994352	
	CAPT4961*4A*	D*96HE1005DXA*	56,000	38,500	14.00	11.50	1,500	6526348	
	CAPT4961*4A*	G*VC950905CXB*	56,500	38,500	13.50	11.00	1,460	6526239	
	CAPT4961*4A*	G*VC950915DXB*	56,000	38,500	13.50	11.00	1,575	6526247	
	CAPT4961*4A*	D*96VC0915DXA*	56,000	38,500	13.50	11.00	1,575	6526317	
	CAPT4961*4A*	D*96MC1005DXA*	56,000	38,500	14.00	11.50	1,550	6591742	
	CAPT4961*4A*	G*E81005C*B*	56,000	38,500	14.00	11.50	1,525	6526221	
	CAPT4961*4A*	D*96MC0805CXA*	56,500	38,500	13.50	11.00	1,460	6591729	
	CAPT4961*4A*	D*96VC0905CXA*	56,500	38,500	13.50	11.00	1,460	6526309	
	CAPT4961*4A*	GME951005DXA*	56,000	38,500	14.00	11.50	1,500	6526281	
	CAPT4961*4A*	DD80VC1005C*A*	57,000	39,000	13.50	11.00	1,550	6526362	
	CAPT4961*4A*	D*96HE0805CXA*	56,000	38,500	13.50	11.00	1,475	6526343	
	CAPT4961*4A*	ADVC81005C*B*	57,000	39,000	13.50	11.00	1,550	6994354	
	CAPT4961*4A*	D*96MC0805DXA*	56,500	38,500	13.50	11.00	1,460	6591735	
	CAPT4961*4A*	G*VM961155DXB*	56,000	38,500	13.50	11.00	1,550	6526271	
	CAPT4961*4A*	G*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6526252	
	CAPT4961*4A*	G*VM960805DXB*	56,500	38,500	13.50	11.00	1,460	6526261	
	CAPT4961*4A*	DD80VC0805C*A*	57,000	39,000	13.50	11.00	1,500	6526359	
	CAPT4961*4A*	G*VC80805C*B*	56,500	38,500	14.00	11.50	1,520	6526226	
	CAPT4961*4A*	G*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6526266	
	CAPT4961*4A*	G*VC950704CXB*	57,000	39,000	13.00	11.00	1,450	6994351	
	CAPT4961*4A*	ADVC80805C*B*	57,000	39,000	13.50	11.00	1,500	6994353	
	CAPT4961*4A*	GME950805CXA*	56,000	38,500	13.50	11.00	1,475	6526276	
	CAPT4961*4A*	G*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6526256	
	CAPT4961*4A*	D*80VC0805C*A*	56,500	38,500	14.00	11.50	1,520	6526296	
	CAPT4961*4A*+EEP			56,500	38,500	13.50	11.00	1,500	6526061
	CAPT4961*4A*+MBVC1600**-1A*			57,000	39,000	13.50	11.50	1,560	6994355
	CAPT4961*4A*+MBVC2000**-1A*			57,000	39,000	14.50	12.00	1,575	6526063
	CHPF4860D6D*+EEP			56,000	38,500	13.00	11.00	1,500	6526065
	CHPF4860D6D*+MBVC2000**-1A*			57,000	39,000	14.00	11.50	1,575	6526067
	CHPF4860D6D*+MBVC2000**-1A*+TXV			57,000	39,000	14.00	11.50	1,575	6526069
	CHPF4860D6D*+TXV	G*VM961005DXB*		56,000	38,500	14.00	11.50	1,550	6526267
	CHPF4860D6D*+TXV	D*96MC1155DXA*		55,000	37,600	13.50	11.00	1,550	6591750
	CHPF4860D6D*+TXV	D*96MC0805DXA*		55,500	38,000	13.00	11.00	1,460	6591737
	CHPF4860D6D*+TXV	D*96VC0905DXA*		56,500	38,500	14.00	11.50	1,460	6526314
	CHPF4860D6D*+TXV	G*VC81005C*B*		56,500	38,500	14.00	11.50	1,520	6526232
	CHPF4860D6D*+TXV	D*80VC1005C*A*		56,500	38,500	14.00	11.50	1,520	6526302
	CHPF4860D6D*+TXV	G*VC91155DXA*		56,000	38,500	13.00	11.00	1,550	6526236
	CHPF4860D6D*+TXV	G*VM960805CXB*		56,500	38,500	13.50	11.00	1,460	6526257
	CHPF4860D6D*+TXV	G*VM960805DXB*		55,500	38,000	13.00	11.00	1,460	6526262
	CHPF4860D6D*+TXV	D*80HE1005C*A*		56,000	38,500	14.00	11.50	1,525	6526292
	CHPF4860D6D*+TXV	G*VC950905CXB*		56,000	38,500	13.50	11.00	1,460	6526240
	CHPF4860D6D*+TXV	G*VC950915DXB*		55,000	37,600	13.00	11.00	1,575	6526248
	CHPF4860D6D*+TXV	G*VC950905DXB*		56,500	38,500	14.00	11.50	1,460	6526244
CHPF4860D6D*+TXV	D*96VC0905CXA*		56,000	38,500	13.50	11.00	1,460	6526310	
CHPF4860D6D*+TXV	GME951005DXA*		56,000	38,500	14.00	11.50	1,500	6526282	
CHPF4860D6D*+TXV	G*E81005C*B*		56,000	38,500	14.00	11.50	1,525	6526222	
CHPF4860D6D*+TXV	G*VC80805C*B*		56,000	38,500	14.00	11.50	1,520	6526227	
CHPF4860D6D*+TXV	GME950805CXA*		56,000	38,500	13.00	11.00	1,475	6526277	
CHPF4860D6D*+TXV	D*96VC1155DXA*		56,000	38,500	13.00	11.00	1,550	6526306	
CHPF4860D6D*+TXV	G*E80805C*B*		56,000	38,500	14.00	11.50	1,550	6526217	

See Notes on Page 37.



Outdoor Unit	Indoor Units		Cooling Ratings				CFM	AHRI #
	Coils/Air Handlers	Furnaces	Total <sup>1</sup>	Sens. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
DX13SN 0611A*	CHPF4860D6D*+TXV	D*80VC0805C*A*	56,000	38,500	14.00	11.50	1,520	6526297
	CHPF4860D6D*+TXV	G*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6526272
	CHPF4860D6D*+TXV	D*96HE0805CXA*	56,000	38,500	13.00	11.00	1,475	6526344
	CHPF4860D6D*+TXV	D*96VC0915DXA*	55,000	37,600	13.00	11.00	1,575	6526318
	CHPF4860D6D*+TXV	D*96HE1005DXA*	56,000	38,500	14.00	11.50	1,500	6526349
	CHPF4860D6D*+TXV	D*80HE0805C*A*	56,000	38,500	14.00	11.50	1,550	6526287
	CHPF4860D6D*+TXV	D*96MC1005DXA*	56,000	38,500	14.00	11.50	1,550	6591743
	CHPF4860D6D*+TXV	G*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6526253
	CHPF4860D6D*+TXV	D*96MC0805CXA*	56,500	38,500	13.50	11.00	1,460	6591730
	CSCF4860N6D*+EEP		55,000	37,600	13.00	11.00	1,500	6526071
	CSCF4860N6D*+MBVC2000**-1A*		56,000	38,500	13.50	11.50	1,575	6526073
	CSCF4860N6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.00	11.50	1,575	6526075
	CSCF4860N6D*+TXV	G*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6526273
	CSCF4860N6D*+TXV	D*80VC1005C*A*	55,500	38,000	13.50	11.00	1,520	6526303
	CSCF4860N6D*+TXV	G*E80805C*B*	54,500	37,400	13.00	11.00	1,550	6526218
	CSCF4860N6D*+TXV	D*96HE1005DXA*	55,000	37,600	13.50	11.00	1,500	6526350
	CSCF4860N6D*+TXV	D*80HE1005C*A*	55,500	38,000	13.50	11.00	1,525	6526293
	CSCF4860N6D*+TXV	D*96HE0805CXA*	55,000	37,600	13.00	11.00	1,475	6526345
	CSCF4860N6D*+TXV	G*VC81005C*B*	55,500	38,000	13.50	11.00	1,520	6526233
	CSCF4860N6D*+TXV	D*80VC0805C*A*	56,500	38,500	13.50	11.50	1,520	6526298
	CSCF4860N6D*+TXV	G*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6526263
	CSCF4860N6D*+TXV	GME950805CXA*	55,000	37,600	13.00	11.00	1,475	6526278
	CSCF4860N6D*+TXV	G*VC80805C*B*	56,500	38,500	13.50	11.50	1,520	6526228
	CSCF4860N6D*+TXV	D*96MC1005DXA*	55,000	37,600	13.50	11.00	1,550	6591745
	CSCF4860N6D*+TXV	G*E81005C*B*	55,500	38,000	13.50	11.00	1,525	6526223
	CSCF4860N6D*+TXV	G*VM960805CXB*	55,500	38,000	13.00	11.00	1,460	6526258
	CSCF4860N6D*+TXV	G*VM961005DXB*	55,000	37,600	13.50	11.00	1,550	6526268
	CSCF4860N6D*+TXV	D*96MC1155DXA*	55,000	37,600	13.50	11.00	1,550	6591751
	CSCF4860N6D*+TXV	GME951005DXA*	55,000	37,600	13.50	11.00	1,500	6526283
	CSCF4860N6D*+TXV	D*96MC0805CXA*	55,500	38,000	13.00	11.00	1,460	6591731
	CSCF4860N6D*+TXV	D*96VC0915DXA*	55,000	37,600	13.00	11.00	1,575	6526319
	CSCF4860N6D*+TXV	G*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6526249
CSCF4860N6D*+TXV	D*80HE0805C*A*	54,500	37,400	13.00	11.00	1,550	6526288	
CSCF4860N6D*+TXV	D*96MC0805DXA*	55,500	38,000	13.00	11.00	1,460	6591738	
DV60PTCD14A*		56,000	38,500	14.00	11.50	1,620	6526045	

<sup>1</sup> BTU/h


<sup>2</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>3</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

# WIRING DIAGRAM — DX13SN0181\*\*-0241\*\*

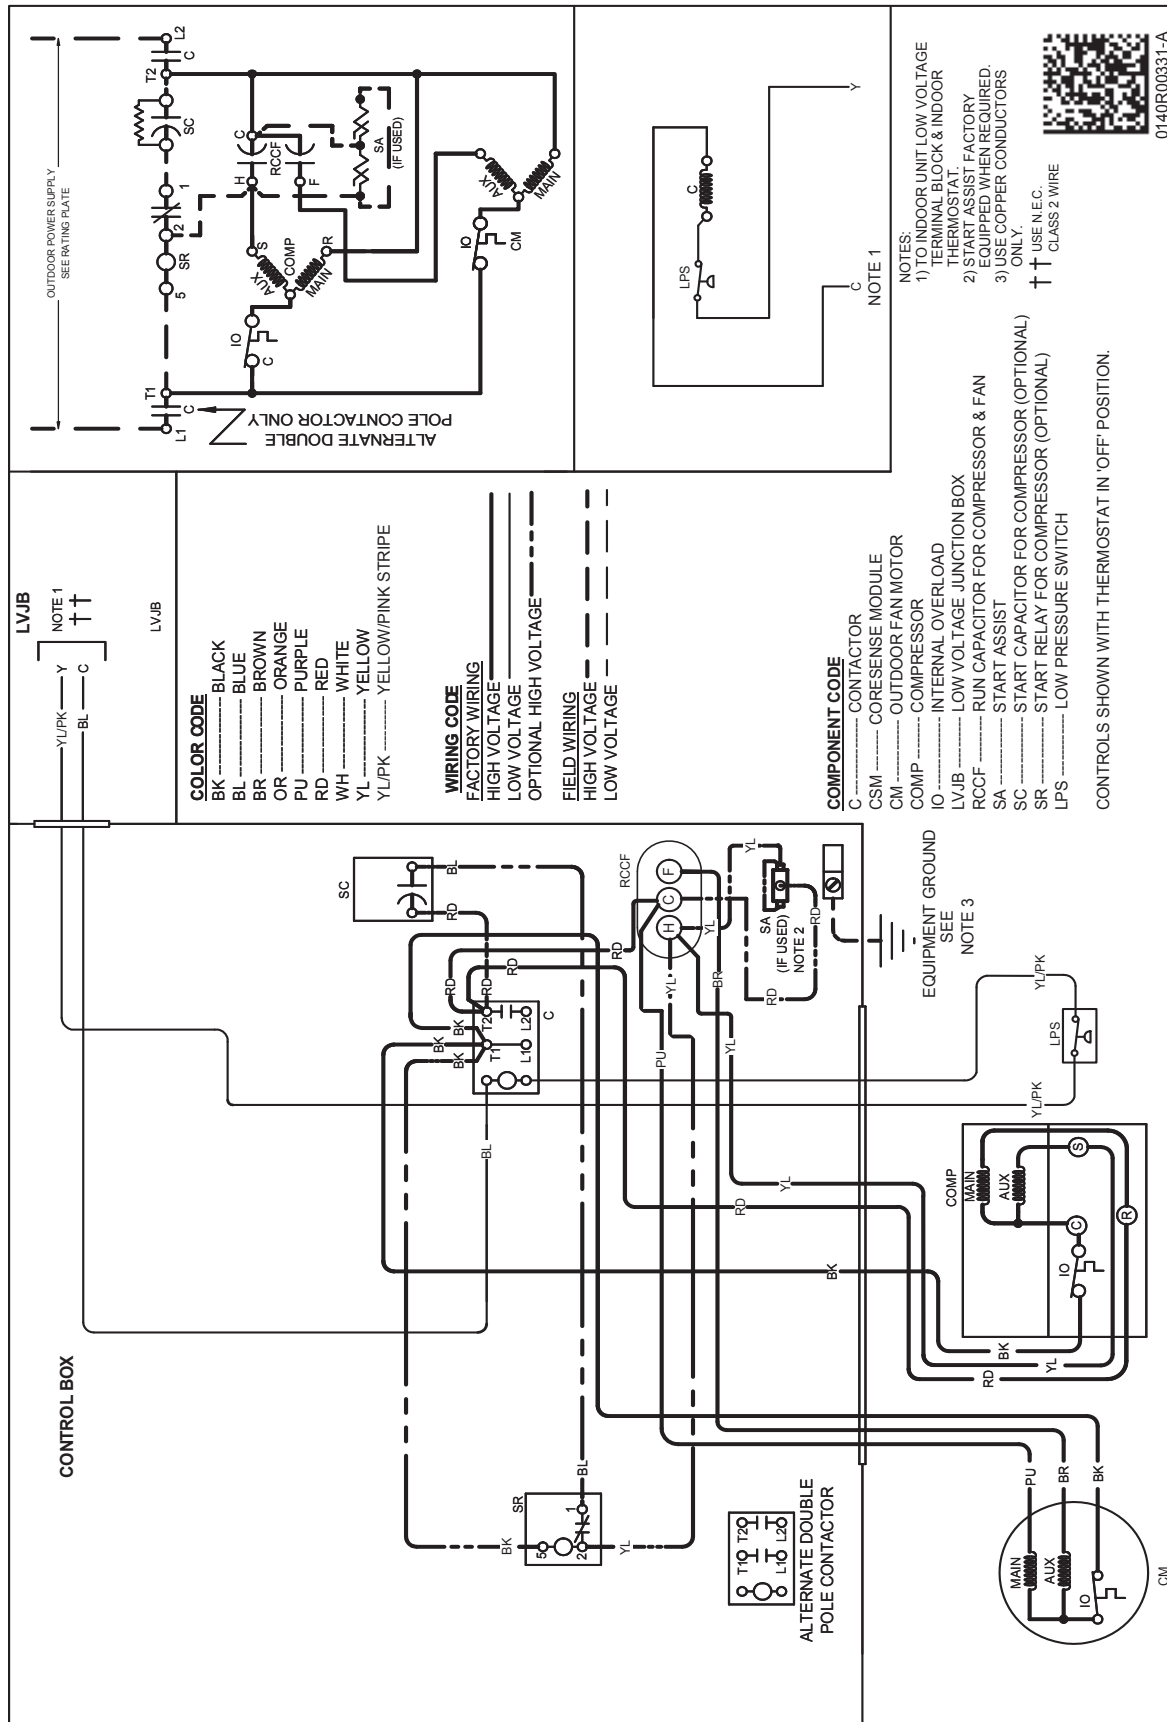




0140R00331-A

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

# WIRING DIAGRAM — DX13SN0361\*\*-0611\*\*

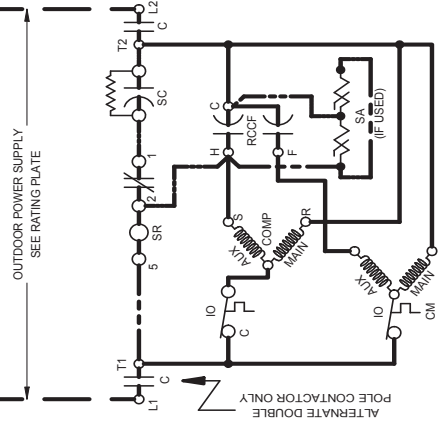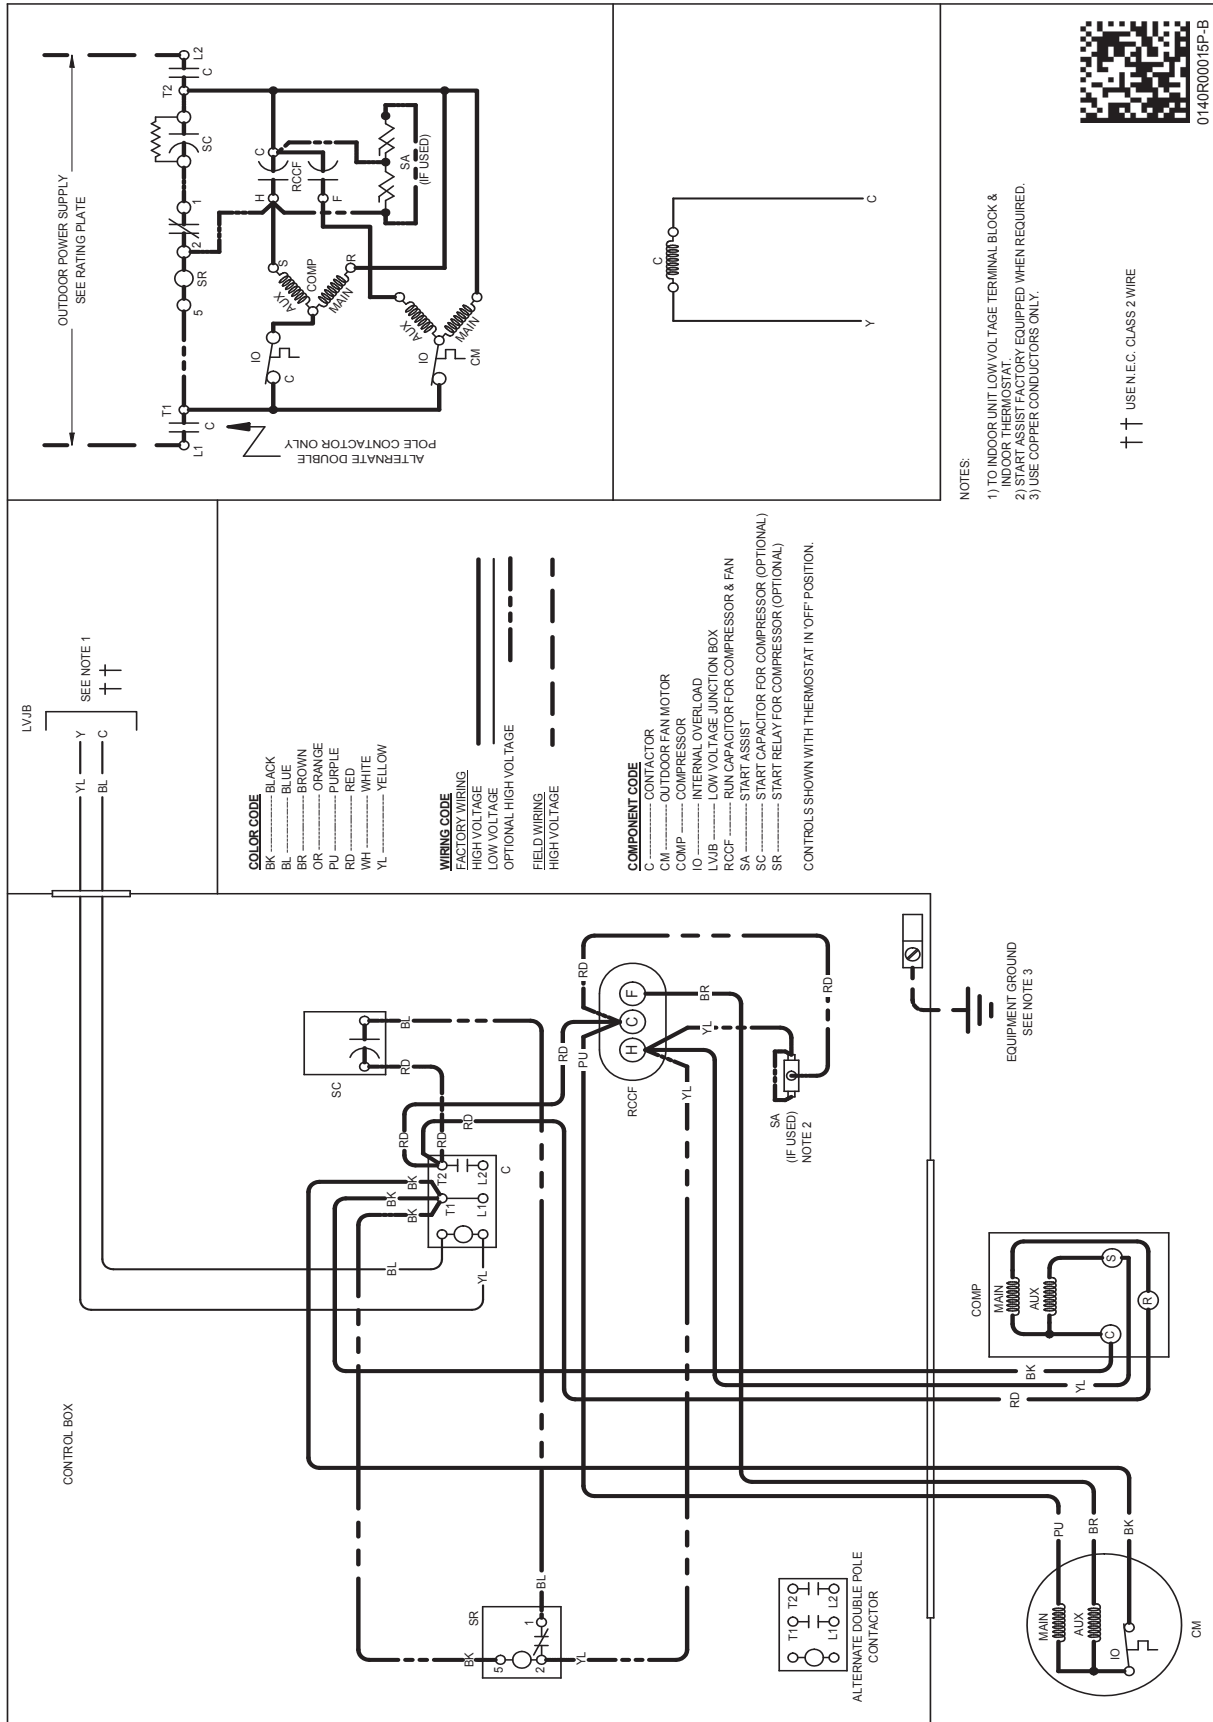

NOTES:

- 1) TO INDOOR UNIT LOW VOLTAGE TERMINAL BLOCK & INDOOR THERMOSTAT.
- 2) START ASSIST FACTORY EQUIPPED WHEN REQUIRED.
- 3) USE COPPER CONDUCTORS ONLY.

0140R00015P-B


†† USE N.E.C. CLASS 2 WIRE

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

## DIMENSIONS

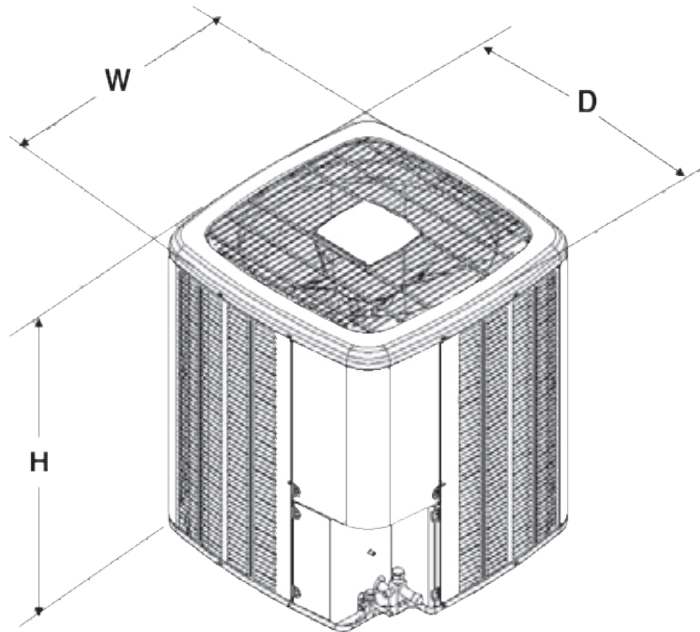

Model	Dimensions		
	W"	D"	H"
DX13SN0181A*	26	26	27½
DX13SN0241A*	26	26	27½
DX13SN0301A*	26	26	27½
DX13SN0361A*	26	26	27½
DX13SN0421A*	29	29	36¼
DX13SN0481A*	29	29	36¼
DX13SN0601A*	29	29	40
DX13SN0611A*	35½	35½	38¼

## ACCESSORIES

Model	Description	DX13SN 018**	DX13SN 024**	DX13SN 030**	DX13SN 036**	DX13SN 042**	DX13SN 048**	DX13SN 060**	DX13SN 061**
ABK-20	Anchor Bracket Kit <sup>^</sup>	X		X	X	X	X	X	X
ABK-21	Anchor Bracket Kit <sup>^</sup>		X						
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X	X
CSR-U-2	Hard-start Kit								
CSR-U-3	Hard-start Kit								
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X	X
LSK02A <sup>2</sup>	Liquid Line Solenoid Kit	X	X	X	X	X	X	X	X
TX2N4 <sup>2</sup>	TXV Kit	X							
TX2N4A <sup>2</sup>	TXV Kit	X	X						
TX3N4 <sup>2</sup>	TXV Kit			X	X				
TX5N4 <sup>2</sup>	TXV Kit					X	X	X	X

<sup>^</sup> Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.